

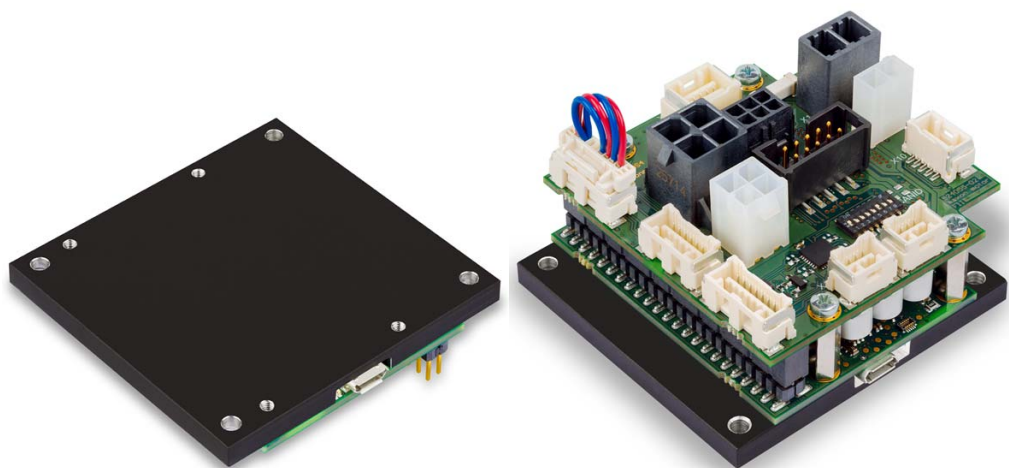
# **EPOS4 Module 50/15**

*Positioning Controller  
P/N 504383*

# **EPOS4 Compact 50/15 CAN**

*Positioning Controller  
P/N 520886*

## **Hardware Reference**



[epos.maxonmotor.com](http://epos.maxonmotor.com)

**Document ID: rel6873**

## TABLE OF CONTENTS

|          |                                                                          |           |
|----------|--------------------------------------------------------------------------|-----------|
| <b>1</b> | <b>About</b>                                                             | <b>5</b>  |
| 1.1      | About this Document . . . . .                                            | 5         |
| 1.2      | About the Devices . . . . .                                              | 8         |
| 1.3      | About the Safety Precautions . . . . .                                   | 9         |
| <b>2</b> | <b>Specifications</b>                                                    | <b>11</b> |
| 2.1      | Technical Data . . . . .                                                 | 11        |
| 2.2      | Thermal Data . . . . .                                                   | 13        |
| 2.3      | Limitations . . . . .                                                    | 15        |
| 2.4      | Dimensional Drawings . . . . .                                           | 15        |
| 2.5      | Standards . . . . .                                                      | 17        |
| <b>3</b> | <b>Setup</b>                                                             | <b>19</b> |
| 3.1      | Generally applicable Rules . . . . .                                     | 19        |
| 3.2      | Pin Assignment for Module Version . . . . .                              | 20        |
| 3.3      | Pin Assignment for Connector Boards & Compact Versions . . . . .         | 23        |
| 3.3.1    | EPOS4 CB Power CAN (520884) / EPOS4 Compact 50/15 CAN (520886) . . . . . | 23        |
| 3.3.2    | Cabling . . . . .                                                        | 23        |
| 3.3.3    | Tools . . . . .                                                          | 25        |
| 3.3.4    | Connections . . . . .                                                    | 25        |
| 3.3.5    | DIP Switch Configuration (SW1) . . . . .                                 | 39        |
| 3.3.6    | Spare Parts . . . . .                                                    | 41        |
| 3.4      | Connection Specifications . . . . .                                      | 42        |
| 3.4.1    | Power Supply . . . . .                                                   | 42        |
| 3.4.2    | Logic Supply . . . . .                                                   | 43        |
| 3.4.3    | Motor . . . . .                                                          | 44        |
| 3.4.4    | Hall Sensor . . . . .                                                    | 45        |
| 3.4.5    | Encoder . . . . .                                                        | 46        |
| 3.4.6    | Sensor . . . . .                                                         | 48        |
| 3.4.7    | Digital I/Os . . . . .                                                   | 59        |

## READ THIS FIRST

**These instructions are intended for qualified technical personnel. Prior commencing with any activities...**

- you must carefully read and understand this manual and
- you must follow the instructions given therein.

**EPOS4 Module 50/15 and EPOS4 Compact 50/15 positioning controllers are considered as partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g) and are intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment.**

**Therefore, you must not put the device into service,...**

- unless you have made completely sure that the other machinery fully complies with the EU directive's requirements!
- unless the other machinery fulfills all relevant health and safety aspects!
- unless all respective interfaces have been established and fulfill the herein stated requirements!

|          |                                                      |           |
|----------|------------------------------------------------------|-----------|
| 3.4.8    | Safe Torque Off I/Os                                 | 63        |
| 3.4.9    | Analog I/Os                                          | 65        |
| 3.4.10   | Serial Communication Interface (SCI) / RS232         | 67        |
| 3.4.11   | CAN Interface                                        | 69        |
| 3.4.12   | Serial Peripheral Interface (SPI)                    | 72        |
| 3.4.13   | USB (X13)                                            | 73        |
| 3.5      | Status Indicators                                    | 74        |
| <b>4</b> | <b>Motherboard Design Guide</b>                      | <b>75</b> |
| 4.1      | Requirements for Components of Third-party Suppliers | 76        |
| 4.1.1    | Socket Headers                                       | 76        |
| 4.1.2    | Supply Voltage                                       | 76        |
| 4.1.3    | Logic Supply Voltage                                 | 77        |
| 4.1.4    | Motor Cables and Motor Chokes                        | 78        |
| 4.1.5    | Recommended Components and Manufacturers             | 79        |
| 4.2      | Design Guidelines                                    | 81        |
| 4.2.1    | Ground                                               | 81        |
| 4.2.2    | Layout                                               | 81        |
| 4.3      | THT Footprint                                        | 81        |
| <b>5</b> | <b>Wiring</b>                                        | <b>83</b> |
| 5.1      | Contents                                             | 83        |
| 5.2      | DC Motors (brushed)                                  | 85        |
| 5.3      | EC Motors (BLDC, brushless)                          | 92        |

---

*••page intentionally left blank••*

# 1 About

## 1.1 About this Document

### 1.1.1 Intended Purpose

Use the document to...

–stay safe,  
–be fast,  
–end up with set  
up and ready-to-go  
equipment.

The purpose of the present document is to familiarize you with the EPOS4 Module 50/15 and EPOS4 Compact 50/15 positioning controllers. It will highlight the tasks for safe and adequate installation and/or commissioning. Follow the described instructions ...

- to avoid dangerous situations,
- to keep installation and/or commissioning time at a minimum,
- to increase reliability and service life of the described equipment.

The present document is part of a documentation set and contains performance data and specifications, information on fulfilled standards, details on connections and pin assignment, and wiring examples. The below overview shows the documentation hierarchy and the interrelationship of its individual parts:

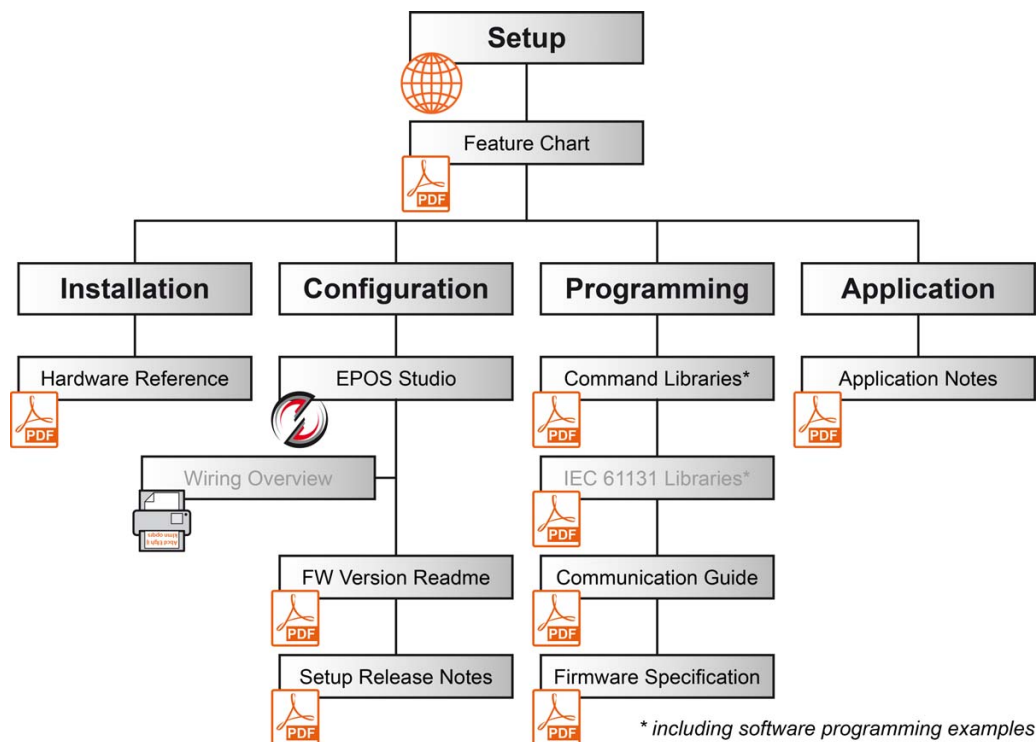


Figure 1-1 Documentation structure

### 1.1.2 Target Audience

The present document is intended for trained and skilled personnel. It conveys information on how to understand and fulfill the respective work and duties.

### 1.1.3 How to use

If not stated otherwise, the described details are valid for both the plug-in module and the stand-alone compact version (→ chapter “1.2 About the Devices” on page 1-8).

Throughout the document, the following notations and codes will be used.

| Notation | Meaning                                                    |
|----------|------------------------------------------------------------|
| (n)      | refers to an item (such as part numbers, list items, etc.) |
| →        | denotes “see”, “see also”, “take note of” or “go to”       |

Table 1-1 Notation used

### 1.1.4 Symbols & Signs

In the course of the present document, the following symbols and signs will be used.

| Type              | Symbol                                                                                           | Meaning                                                   |                                                                                                                                              |
|-------------------|--------------------------------------------------------------------------------------------------|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Safety alert      | <br>(typical)   | DANGER                                                    | Indicates an <b>imminent hazardous situation</b> . If not avoided, it <b>will result in death or serious injury</b> .                        |
|                   |                                                                                                  | WARNING                                                   | Indicates a <b>potential hazardous situation</b> . If not avoided, it <b>can result in death or serious injury</b> .                         |
|                   |                                                                                                  | CAUTION                                                   | Indicates a <b>probable hazardous situation</b> or calls the attention to unsafe practices. If not avoided, it <b>may result in injury</b> . |
| Prohibited action | <br>(typical) | Indicates a dangerous action. Hence, <b>you must not!</b> |                                                                                                                                              |
| Mandatory action  | <br>(typical) | Indicates a mandatory action. Hence, <b>you must!</b>     |                                                                                                                                              |
| Information       |               | Requirement / Note / Remark                               | Indicates an activity you must perform prior continuing, or gives information on a particular item you need to observe.                      |
|                   |               | Best practice                                             | Indicates an advice or recommendation on the easiest and best way to further proceed.                                                        |
|                   |               | Material Damage                                           | Indicates information particular to possible damage of the equipment.                                                                        |

Table 1-2 Symbols and signs

### 1.1.5 Trademarks and Brand Names

For easier legibility, registered brand names are listed below and will not be further tagged with their respective trademark. It must be understood that the brands (the list below is not necessarily concluding) are protected by copyright and/or other intellectual property rights even if their legal trademarks are omitted in the later course of this document.

| Brand Name                                             | Trademark Owner                                                                          |
|--------------------------------------------------------|------------------------------------------------------------------------------------------|
| Adobe® Reader®                                         | © Adobe Systems Incorporated, USA-San Jose, CA                                           |
| BiSS                                                   | © iC-Haus GmbH, DE-Bodenheim                                                             |
| CANopen®<br>CiA®                                       | © CiA CAN in Automation e.V, DE-Nuremberg                                                |
| CLIK-Mate™<br>Micro-Fit™<br>Mini-Fit Jr.™<br>Mega-Fit® | © Molex, USA-Lisle, IL                                                                   |
| EnDat                                                  | © DR. JOHANNES HEIDENHAIN GmbH, DE-Traunreut                                             |
| EtherCAT®                                              | © EtherCAT Technology Group, DE-Nuremberg, licensed by Beckhoff Automation GmbH, DE-Verl |
| Linux®                                                 | © Linus Torvalds (The Linux Foundation, USA-San Francisco CA)                            |
| Littelfuse®<br>SMD NANO2®                              | © Littelfuse Inc., USA-Chicago, IL                                                       |
| Windows®                                               | © Microsoft Corporation, USA-Redmond, WA                                                 |

Table 1-3 Brand names and trademark owners

### 1.1.6 Copyright

© 2017 maxon motor. All rights reserved.

The present document – including all parts thereof – is protected by copyright. Any use (including reproduction, translation, microfilming, and other means of electronic data processing) beyond the narrow restrictions of the copyright law without the prior approval of maxon motor ag, is not permitted and subject to prosecution under the applicable law.

**maxon motor ag**  
Brünigstrasse 220  
P.O.Box 263  
CH-6072 Sachseln

Phone +41 41 666 15 00  
Fax +41 41 666 16 50  
Web [www.maxonmotor.com](http://www.maxonmotor.com)

## 1.2 About the Devices

*Capabilities of the device, included features, and supported motors.*

maxon motor control's EPOS4 Module 50/15 and EPOS4 Compact 50/15 are small-sized, full digital, smart positioning control units. Their high power density allow flexible use for brushed DC and brushless EC (BLDC) motors up to approximately 750 Watts with various feedback options, such as Hall sensors, incremental encoders as well as absolute sensors in a multitude of drive applications.

The devices are specially designed to be commanded and controlled as a slave node in a CANopen network. In addition, the units can be operated via any USB or RS232 (the Module requires an external transceiver) communication port of a Windows or Linux workstation. Moreover, the integrated extension interface allows pooling with optionally available communication interfaces, such as EtherCAT or other additional functionalities.

Latest technology, such as field-oriented control (FOC) and acceleration/velocity feed forward in combination with highest control cycle rates allow sophisticated, ease-of-use motion control.

Thanks to its smart design, the EPOS4 Module 50/15 can either be used in combination with EPOS4 CB Power connector boards as a compact, integrated solution or be incorporated into customer-specific motherboards for single axis or multi axes motion control systems. The controller is available in the following configurations:

- **EPOS4 Module 50/15 (504383)**  
Plug-in module for use with maxon motor control EPOS4 connector boards or customer-specific motherboards
- **EPOS4 CB Power CAN (520884)**  
Connector board for initial commissioning or combination to a compact solution providing all connectors, including CANopen interface
- **EPOS4 Compact 50/15 CAN (520886)**  
Fully integrated, compact, ready-to-use assembly of plug-in module and CANopen connector board

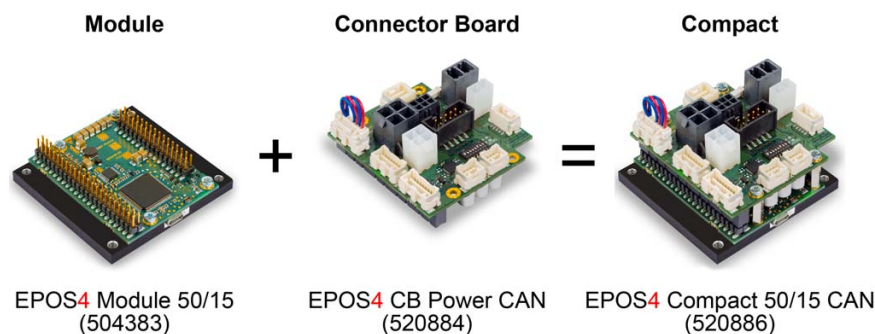


Figure 1-2 Configuration overview

For easier legibility, in the later course of this document naming of components will be as follows:

- EPOS4 Module 50/15 will be named as «**Module**»
- EPOS4 Compact 50/15 will be named as «**Compact**» covering all Compact versions
- EPOS4 Compact 50/15 CAN will be named as «**Compact CAN**»
- «**EPOS4**» will be used to describe both versions, Module and Compact and/or other EPOS4 positioning controllers as a whole

Find the latest edition of the present document as well as additional documentation and software for EPOS4 positioning controllers also on the Internet: →<http://epos.maxonmotor.com>.

### 1.3 About the Safety Precautions

Keep in mind:

Safety first! Always!

- Make sure that you have read and understood the note “READ THIS FIRST” on page A-2!
- Do not engage with any work unless you possess the stated skills (→chapter “1.1.2 Target Audience” on page 1-5)!
- Refer to →chapter “1.1.4 Symbols & Signs” on page 1-6 to understand the subsequently used indicators!
- You must observe any regulation applicable in the country and/or at the site of implementation with regard to health and safety/accident prevention and/or environmental protection!



#### DANGER

##### High voltage and/or electrical shock

##### Touching live wires causes death or serious injuries!

- Consider any power cable as connected to live power, unless having proven the opposite!
- Make sure that neither end of cable is connected to live power!
- Make sure that power source cannot be engaged while work is in process!
- Obey lock-out/tag-out procedures!
- Make sure to securely lock any power engaging equipment against unintentional engagement and tag it with your name!



#### Requirements

- Make sure that all associated devices and components are installed according to local regulations.
- Be aware that, by principle, an electronic apparatus can not be considered fail-safe. Therefore, you must make sure that any machine/apparatus has been fitted with independent monitoring and safety equipment. If the machine/apparatus should break down, if it is operated incorrectly, if the control unit breaks down or if the cables break or get disconnected, etc., the complete drive system must return – and be kept – in a safe operating mode.
- Be aware that you are not entitled to perform any repair on components supplied by maxon motor.



#### Electrostatic sensitive device (ESD)

- Wear working cloth and use equipment in compliance with ESD protective measures.
- Handle device with extra care.

*••page intentionally left blank••*

## 2 Specifications

### 2.1 Technical Data

| EPOS4 Module 50/15 (504383)<br>EPOS4 Compact 50/15 CAN (520886) |                                                               |                                                                                                       |                                                                                   |  |
|-----------------------------------------------------------------|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|
| Electrical<br>Rating                                            | Nominal power supply voltage +V <sub>CC</sub>                 | 10...50 VDC                                                                                           |                                                                                   |  |
|                                                                 | Nominal logic supply voltage +V <sub>C</sub>                  | Module                                                                                                | 10...50 VDC                                                                       |  |
|                                                                 |                                                               | Compact                                                                                               | 10...50 VDC, optional                                                             |  |
|                                                                 | Absolute supply voltage +V <sub>min</sub> / +V <sub>max</sub> | 8 VDC / 56 VDC                                                                                        |                                                                                   |  |
|                                                                 | Output voltage (max.)                                         | 0.9 x +V <sub>CC</sub>                                                                                |                                                                                   |  |
|                                                                 | Output current I <sub>cont</sub> / I <sub>max</sub> (<60 s)   | 15 A / 30 A                                                                                           |                                                                                   |  |
|                                                                 | Pulse Width Modulation frequency                              | 50 kHz                                                                                                |                                                                                   |  |
|                                                                 | Sampling rate PI current controller                           | 25 kHz (40 μs)                                                                                        |                                                                                   |  |
|                                                                 | Sampling rate PID speed controller                            | 2.5 kHz (400 μs)                                                                                      |                                                                                   |  |
|                                                                 | Sampling rate PID positioning controller                      | 2.5 kHz (400 μs)                                                                                      |                                                                                   |  |
|                                                                 | Max. efficiency                                               | 98% (➔Figure 2-4)                                                                                     |                                                                                   |  |
|                                                                 | Max. speed DC motor                                           | limited by max. permissible speed (motor) and max. output voltage (controller)                        |                                                                                   |  |
|                                                                 | Max. speed EC motor (block)                                   | 100'000 rpm (1 pole pair)                                                                             |                                                                                   |  |
|                                                                 | Max. speed EC motor (sinusoidal)                              | 50'000 rpm (1 pole pair)                                                                              |                                                                                   |  |
|                                                                 | Built-in motor choke                                          | Module                                                                                                | —                                                                                 |  |
|                                                                 |                                                               | Compact                                                                                               | 3 x 2.2 μH; 15 A                                                                  |  |
| Inputs<br>&<br>Outputs                                          | Digital Input 1 (general purpose)                             | Module                                                                                                | +2.1...+36 VDC                                                                    |  |
|                                                                 | Digital Input 2 (general purpose)                             | Compact                                                                                               | DIP switch-selectable levels:<br>• Logic: +2.0...+30 VDC<br>• PLC: +9.0...+30 VDC |  |
|                                                                 | Digital Input 3 (general purpose)                             |                                                                                                       |                                                                                   |  |
|                                                                 | Digital Input 4 (general purpose)                             |                                                                                                       |                                                                                   |  |
|                                                                 | Digital Output 1 (general purpose)                            | max. 36 VDC / I <sub>L</sub> ≤500 mA                                                                  |                                                                                   |  |
|                                                                 | Digital Output 2 (general purpose)                            | (open collector with internal pull-up)                                                                |                                                                                   |  |
|                                                                 | STO Input 1                                                   | +4.5...+30 VDC (optically isolated)                                                                   |                                                                                   |  |
|                                                                 | STO Input 2                                                   |                                                                                                       |                                                                                   |  |
|                                                                 | STO Output                                                    | max. 30 VDC / I <sub>L</sub> ≤15 mA (optically isolated with self-resetting short-circuit protection) |                                                                                   |  |
| Analog Input 1                                                  | Resolution 12-bit, −10...+10 V, 10 kHz, differential          |                                                                                                       |                                                                                   |  |
| Analog Input 2                                                  |                                                               |                                                                                                       |                                                                                   |  |
| Analog Output 1                                                 | Resolution 12-bit, −4...+4 V, 25 kHz, referenced to GND       |                                                                                                       |                                                                                   |  |
| Analog Output 2                                                 |                                                               |                                                                                                       |                                                                                   |  |
| Digital Hall sensor signals<br>H1, H2, H3                       | +2.0...+24 VDC (internal pull-up)                             |                                                                                                       |                                                                                   |  |

Continued on next page.

| EPOS4 Module 50/15 (504383)<br>EPOS4 Compact 50/15 CAN (520886) |                                                                                                                                                                                                                          |                                                                                                                                                                                          |                                                                                                 |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Inputs & Outputs<br>(continued)                                 | Digital incremental encoder signals<br>A, A\, B, B\, I, I\                                                                                                                                                               | EIA RS422, max. 6.25 MHz                                                                                                                                                                 |                                                                                                 |
|                                                                 | Sensor signals<br>(choice between multiple functions)<br>• Digital incremental encoder<br>• Analog incremental encoder*<br>• SSI absolute encoder<br>• High-speed digital input 1...4 and<br>High-speed digital output 1 | 3-channel, EIA RS422, max. 6.25 MHz<br>3-channel, resolution 12-bit, $\pm 1.8$ V, differential<br>configurable, EIA RS422, 5 MHz<br>EIA RS422, max. 6.25 MHz<br>EIA RS422, max. 6.25 MHz |                                                                                                 |
| Voltage Outputs                                                 | Sensor supply voltage $V_{\text{Sensor}}$                                                                                                                                                                                | +5 VDC / $I_L \leq 100$ mA                                                                                                                                                               |                                                                                                 |
|                                                                 | Auxiliary output voltage $V_{\text{Aux}}$                                                                                                                                                                                | +5 VDC / $I_L \leq 150$ mA                                                                                                                                                               |                                                                                                 |
| Motor Connections                                               | DC motor                                                                                                                                                                                                                 | + Motor, – Motor                                                                                                                                                                         |                                                                                                 |
|                                                                 | EC motor                                                                                                                                                                                                                 | Motor winding 1, Motor winding 2, Motor winding 3                                                                                                                                        |                                                                                                 |
| Interfaces                                                      | RS232                                                                                                                                                                                                                    | Module                                                                                                                                                                                   | max. 115'200 bit/s; external transceiver necessary                                              |
|                                                                 |                                                                                                                                                                                                                          | Compact                                                                                                                                                                                  | max. 115'200 bit/s                                                                              |
|                                                                 | USB 2.0 / USB 3.0                                                                                                                                                                                                        | Full Speed                                                                                                                                                                               |                                                                                                 |
|                                                                 | CAN                                                                                                                                                                                                                      | max. 1 Mbit/s                                                                                                                                                                            |                                                                                                 |
| Status Indicators                                               | Operation                                                                                                                                                                                                                | green LED                                                                                                                                                                                |                                                                                                 |
|                                                                 | Error                                                                                                                                                                                                                    | red LED                                                                                                                                                                                  |                                                                                                 |
| Physical                                                        | Weight                                                                                                                                                                                                                   | Module                                                                                                                                                                                   | approx. 70 g                                                                                    |
|                                                                 |                                                                                                                                                                                                                          | Compact CAN                                                                                                                                                                              | approx. 126 g                                                                                   |
|                                                                 | Dimensions (L x W x H)                                                                                                                                                                                                   | Module                                                                                                                                                                                   | 59.5 x 62.0 x 16.4 mm                                                                           |
|                                                                 |                                                                                                                                                                                                                          | Compact CAN                                                                                                                                                                              | 59.5 x 65.5 x 35.1 mm                                                                           |
|                                                                 | Mounting                                                                                                                                                                                                                 | Module                                                                                                                                                                                   | pluggable female headers 2.54 mm or<br>mounting holes for M3 screws                             |
|                                                                 |                                                                                                                                                                                                                          | Compact                                                                                                                                                                                  | mounting holes for M3 screws                                                                    |
| Environmental Conditions                                        | Temperature                                                                                                                                                                                                              | Operation                                                                                                                                                                                | Module: $-30 \dots +25$ °C<br>Compact: $-30 \dots +25$ °C                                       |
|                                                                 |                                                                                                                                                                                                                          | Extended range <sup>1)</sup>                                                                                                                                                             | $+25 \dots +77$ °C<br>Derating $-0.288$ A/°C (→ Figure 2-3)<br>Additional heat sink → Table 2-5 |
|                                                                 |                                                                                                                                                                                                                          | Storage                                                                                                                                                                                  | $-40 \dots +85$ °C                                                                              |
|                                                                 | Altitude <sup>2)</sup>                                                                                                                                                                                                   | Operation                                                                                                                                                                                | 0...6'000 m MSL                                                                                 |
|                                                                 |                                                                                                                                                                                                                          | Extended range <sup>1)</sup>                                                                                                                                                             | 6'000...10'000 m MSL<br>Derating → Figure 2-3                                                   |
|                                                                 | Humidity                                                                                                                                                                                                                 | 5...90% (condensation not permitted)                                                                                                                                                     |                                                                                                 |

\* Available with an upcoming firmware release.

- 1) Operation within the extended range (temperature and altitude) is permitted. However, a respective derating (declination of output current  $I_{\text{cont}}$ ) as to the stated values will apply or the use of an additional heat sink is necessary.
- 2) Operating altitude in meters above Mean Sea Level, MSL.

Table 2-4      Technical data

## 2.2 Thermal Data

### 2.2.1 Derating of Output Current (Operation without additional Heat Sink)

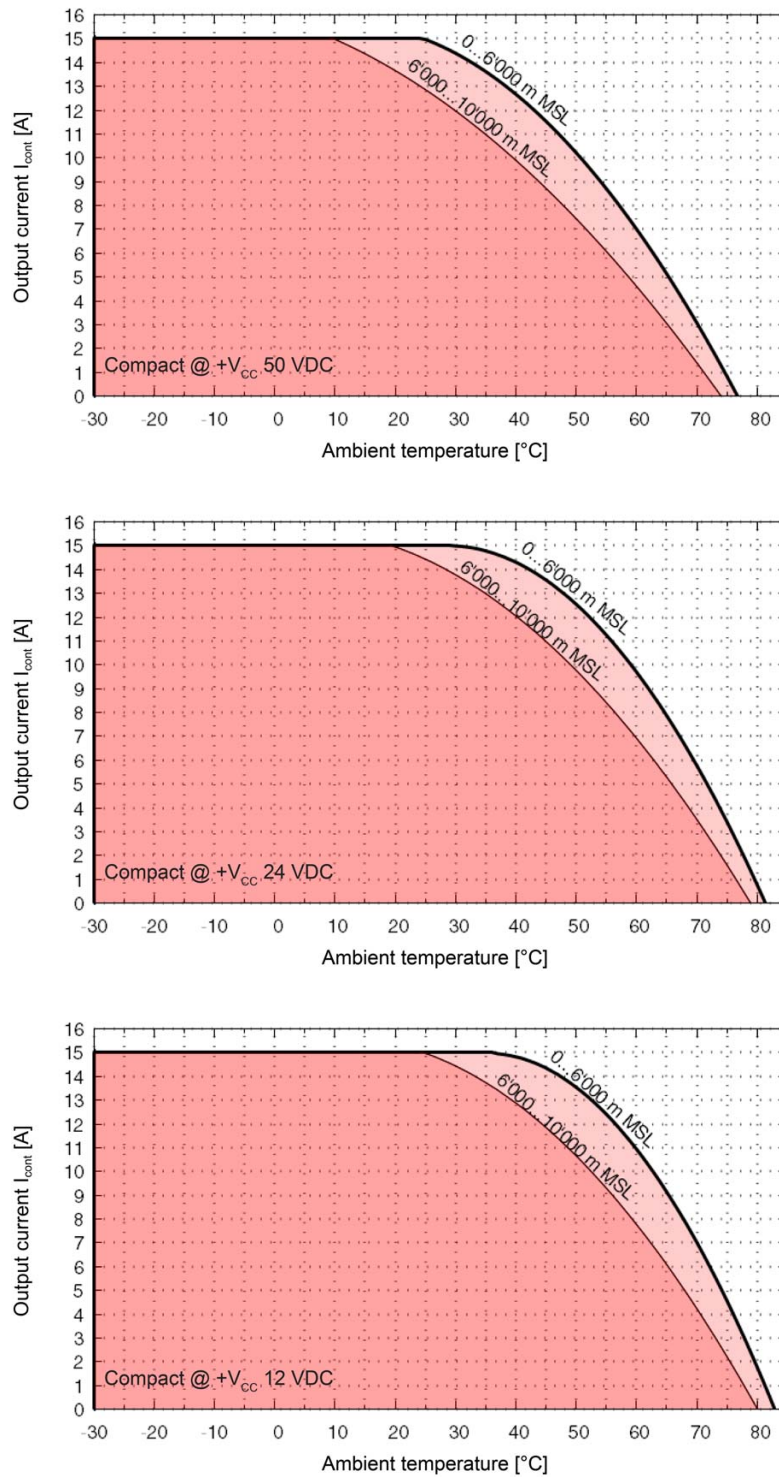


Figure 2-3 Derating of output current (operation without additional heat sink)

## 2.2.2 Operation with Heat Sink

| Thermal resistance of heat sink $R_{th_{HS-Amb}}$ [K/W] |             | Ambient temperature $T_{Amb}$ |                                  |       |       |       |       |
|---------------------------------------------------------|-------------|-------------------------------|----------------------------------|-------|-------|-------|-------|
|                                                         |             | 75 °C                         | 65 °C                            | 55 °C | 45 °C | 35 °C | 25 °C |
| Output current $I_{cont}$                               | 0...2.5 A   | ≤5.1                          | No additional heat sink required |       |       |       |       |
|                                                         | 2.5...5 A   | ≤3.9                          |                                  |       |       |       |       |
|                                                         | 5...7.5 A   | ≤2.9                          |                                  |       |       |       |       |
|                                                         | 7.5...10 A  | ≤2.0                          |                                  |       |       |       |       |
|                                                         | 10...12.5 A | ≤1.3                          |                                  |       |       |       |       |
|                                                         | 12.5...15 A | ≤0.9                          |                                  |       |       |       |       |

Table 2-5 Thermal resistance of additional heat sink [K/W]

| Recommended manufacturer                                                                             | Type                             | Dimensions [mm]                  | Thermal resistance $R_{th_{HS-Amb}}$ [K/W] |
|------------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------|--------------------------------------------|
| Fischer<br><a href="http://www.fischerelektronik.de/en/">http://www.fischerelektronik.de/en/</a>     | SK 100                           | 59.5 x 66 x 40<br>75 x 66 x 40   | 2.4<br>2.0                                 |
|                                                                                                      | SK 111                           | 62 x 58 x 40<br>75 x 58 x 40     | 2.2<br>2.0                                 |
|                                                                                                      | SK 485                           | 59.5 x 61 x 8.9<br>75 x 61 x 8.9 | 4.5<br>4.0                                 |
|                                                                                                      | ICK PGA 25x25                    | 62.5 x 62.5 x 20                 | 3 @ 1 m/s airflow                          |
| Thermo Electric Devices<br><a href="http://www.rs-components.com/">http://www.rs-components.com/</a> | TDEX6015/TH                      | 60 x 60 x 16                     | 2                                          |
|                                                                                                      | TDEX6015/TH12G, with mounted fan | 60 x 60 x 47                     | 0.5                                        |

Table 2-6 Heat sink – Recommended components

### 2.2.3 Power Dissipation and Efficiency

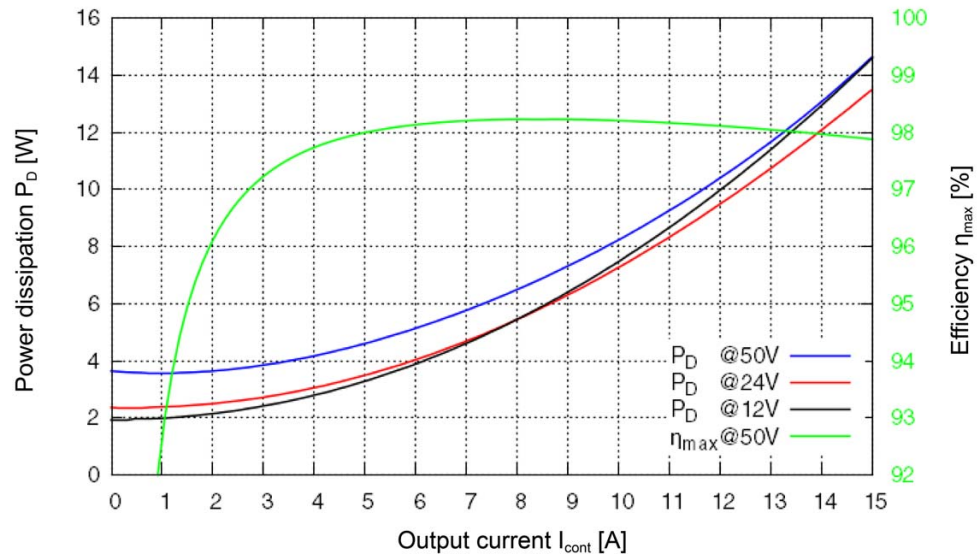


Figure 2-4 Power dissipation and efficiency

## 2.3 Limitations

| Protection functionality | Switch-off threshold | Recovery threshold |
|--------------------------|----------------------|--------------------|
| Undervoltage             | 8.0 V                | 8.5 V              |
| Overvoltage              | 58 V                 | 56 V               |
| Overcurrent              | 40 A                 | —                  |
| Thermal overload         | 95 °C                | 90 °C              |

Table 2-7 Limitations

## 2.4 Dimensional Drawings

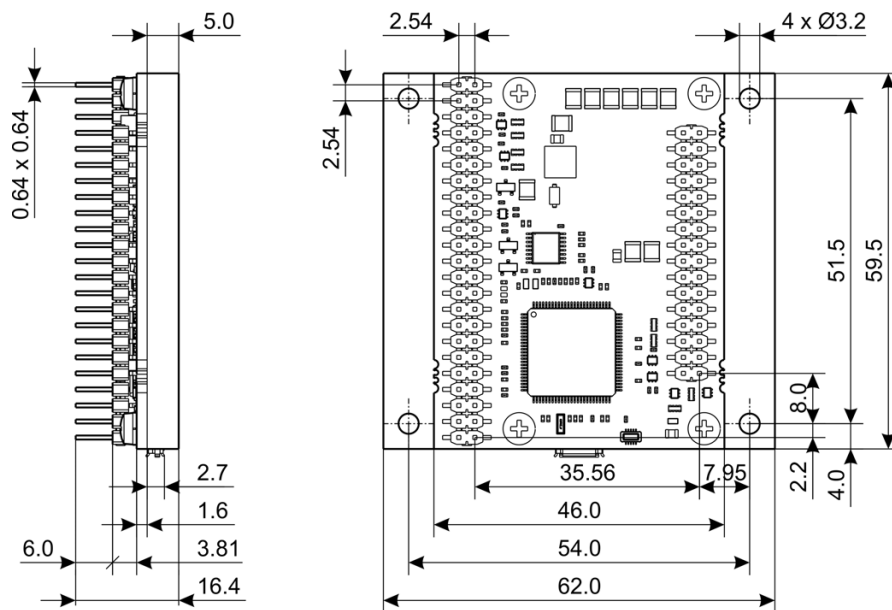


Figure 2-5 EPOS4 Module 50/15 – Dimensional drawing [mm]

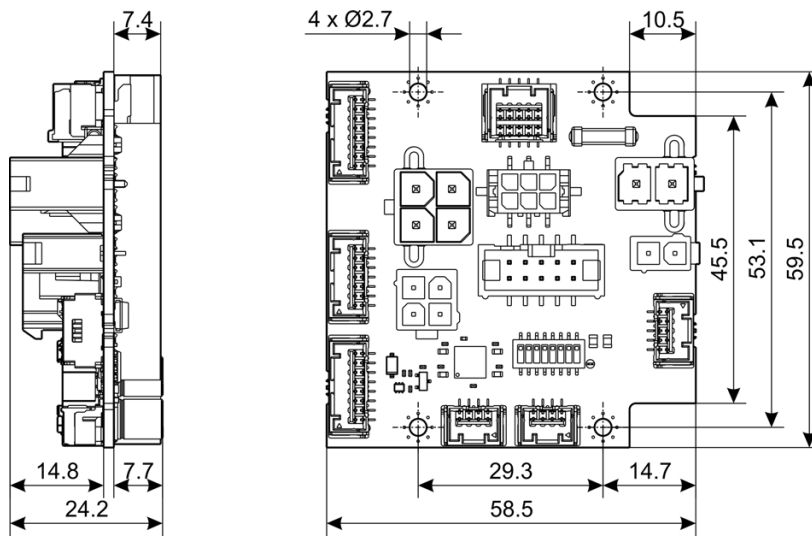


Figure 2-6 EPOS4 CB Power CAN – Dimensional drawing [mm]

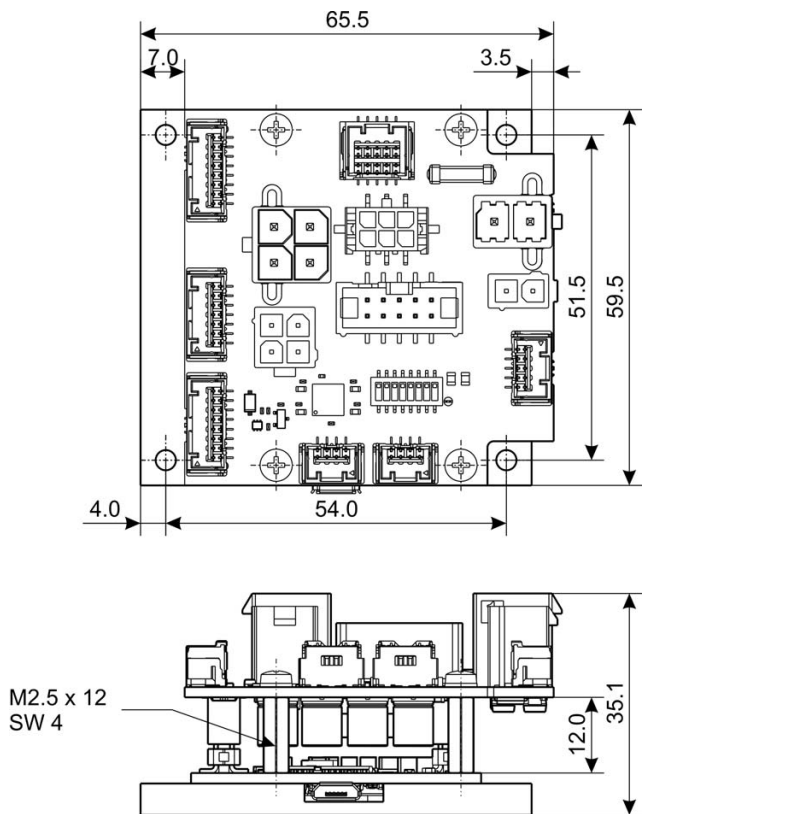


Figure 2-7 EPOS4 Compact 50/15 CAN – Dimensional drawing [mm]

## 2.5 Standards

The described device has been successfully tested for compliance with the below listed standards. In practical terms, only the complete system (the fully operational equipment comprising all individual components, such as motor, servo controller, power supply unit, EMC filter, cabling etc.) can undergo an EMC test to ensure interference-free operation.



### Important Notice

*The device's compliance with the mentioned standards does not imply its compliance within the final, ready to operate setup. In order to achieve compliance of your operational system, you must perform EMC testing of the involved equipment as a whole.*

| Electromagnetic Compatibility |                        |                                                                                 |
|-------------------------------|------------------------|---------------------------------------------------------------------------------|
| Generic                       | IEC/EN 61000-6-2       | Immunity for industrial environments                                            |
|                               | IEC/EN 61000-6-3       | Emission standard for residential, commercial and light-industrial environments |
| Applied                       | IEC/EN 55022 (CISPR22) | Radio disturbance characteristics / radio interference                          |
|                               | IEC/EN 61000-4-3       | Radiated, radio-frequency, electromagnetic field immunity test >10 V/m          |
|                               | IEC/EN 61000-4-4       | Electrical fast transient/burst immunity test $\pm 2$ kV                        |
|                               | IEC/EN 61000-4-6       | Immunity to conducted disturbances, induced by radio-frequency fields 10 Vrms   |

| Others      |                  |                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment | IEC/EN 60068-2-6 | Environmental testing – Test Fc: Vibration (sinusoidal, 10...500 Hz, 20 m/s <sup>2</sup> )                                                                                                                                                                                                                                                                                                                       |
|             | MIL-STD-810F     | Random transport (10...500 Hz up to 2.53 g <sub>rms</sub> )                                                                                                                                                                                                                                                                                                                                                      |
| Safety      | UL File Number   | Unassembled printed circuit board<br><ul style="list-style-type: none"> <li>Module: E76251; E207844; E337862</li> <li>Compact CAN: E76251; E116354; E207844; E337862</li> </ul>                                                                                                                                                                                                                                  |
| Reliability | MIL-HDBK-217F    | Reliability prediction of electronic equipment<br>Environment: Ground, benign (GB)<br>Ambient temperature: 298 K (25 °C)<br>Component stress: In accordance with circuit diagram and nominal power<br>Mean Time Between Failures (MTBF)<br><ul style="list-style-type: none"> <li>Module: 240'400 hours (with heat sink &lt;3.1 K/W)</li> <li>Compact CAN: 199'049 hours (with heat sink &lt;3.1 K/W)</li> </ul> |

Table 2-8 Standards

*••page intentionally left blank••*

### 3 Setup

**IMPORTANT NOTICE: PREREQUISITES FOR PERMISSION TO COMMENCE INSTALLATION**

**EPOS4 Module 50/15 and EPOS4 Compact 50/15** positioning controllers are considered as partly completed machinery according to EU Directive 2006/42/EC, Article 2, Clause (g) and **are intended to be incorporated into or assembled with other machinery or other partly completed machinery or equipment.**

**WARNING****Risk of injury**

**Operating the device without the full compliance of the surrounding system with the EU Directive 2006/42/EC may cause serious injuries!**

- Do not operate the device, unless you have made completely sure that the other machinery fully complies with the EU directive's requirements!
- Do not operate the device, unless the other machinery fulfills all relevant health and safety aspects!
- Do not operate the device, unless all respective interfaces have been established and fulfill the requirements stated in this document!

#### 3.1 Generally applicable Rules

**Maximal permitted supply voltage**

- Make sure that supply power is between 10...50 VDC.
- Supply voltages above 56 VDC, or wrong polarity will destroy the unit.
- Note that the necessary output current is depending on the load torque. Yet, the output current limits are as follows:
  - continuous max. 15 A
  - short-time (acceleration) max. 30 A

**Hot plugging the USB interface may cause hardware damage**

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.

### 3.2 Pin Assignment for Module Version

For in-depth details on connections → chapter “3.4 Connection Specifications” on page 3-42.

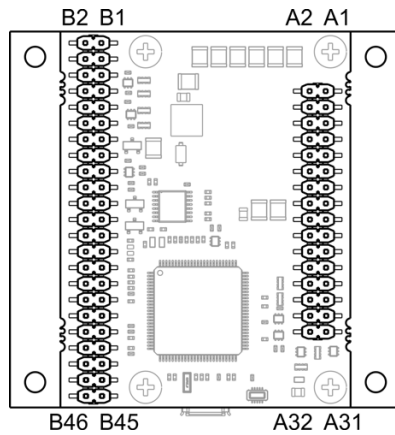


Figure 3-8 Pin assignment

| Pin                                                                  | Signal                        | Description                                             |
|----------------------------------------------------------------------|-------------------------------|---------------------------------------------------------|
| A1...A4**                                                            | Motor (+M)<br>Motor winding 1 | DC motor: Motor +<br>EC motor: Winding 1                |
| A5...A8**                                                            | Motor (-M)<br>Motor winding 2 | DC motor: Motor -<br>EC motor: Winding 2                |
| A9...A12**                                                           | Motor winding 3               | EC motor: Winding 3                                     |
| A13...A16**                                                          | +V <sub>CC</sub>              | Nominal power supply voltage (+10...+50 VDC)            |
| A17                                                                  | +V <sub>C</sub>               | Nominal logic supply voltage (+10...+50 VDC)            |
| A18...A22**                                                          | GND                           | Ground                                                  |
| A23                                                                  | Hall sensor 1                 | Hall sensor 1 input                                     |
| A24                                                                  | Hall sensor 2                 | Hall sensor 2 input                                     |
| A25                                                                  | Hall sensor 3                 | Hall sensor 3 input                                     |
| A26                                                                  | V <sub>Sensor</sub>           | Sensor supply voltage (+5 VDC; I <sub>L</sub> ≤ 100 mA) |
| A27                                                                  | Channel A                     | Digital incremental encoder channel A                   |
| A28                                                                  | Channel A\                    | Digital incremental encoder channel A complement        |
| A29                                                                  | Channel B                     | Digital incremental encoder channel B                   |
| A30                                                                  | Channel B\                    | Digital incremental encoder channel B complement        |
| A31                                                                  | Channel I                     | Digital incremental encoder channel I                   |
| A32                                                                  | Channel I\                    | Digital incremental encoder channel I complement        |
| ** Connect all pins in respect to the individual pin current rating. |                               |                                                         |

Table 3-9 Pin assignment A1...A32 (X1...X5)

| Pin | Signal                                              | Description                                                                                                                                                          |
|-----|-----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B1  | DigIN1                                              | Digital input 1                                                                                                                                                      |
| B2  | DigIN2                                              | Digital input 2                                                                                                                                                      |
| B3  | DigIN3                                              | Digital input 3                                                                                                                                                      |
| B4  | DigIN4                                              | Digital input 4                                                                                                                                                      |
| B5  | DigOUT1                                             | Digital output 1                                                                                                                                                     |
| B6  | DigOUT2                                             | Digital output 2                                                                                                                                                     |
| B7  | Channel A<br>HsDigIN1                               | Digital/analog incremental encoder channel A<br>High-speed digital input 1                                                                                           |
| B8  | Channel A\<br>HsDigIN1\<br>                         | Digital/analog incremental encoder channel A complement<br>High-speed digital input 1 complement                                                                     |
| B9  | Channel B<br>HsDigIN2                               | Digital/analog incremental encoder channel B<br>High-speed digital input 2                                                                                           |
| B10 | Channel B\<br>HsDigIN2\<br>                         | Digital/analog incremental encoder channel B complement<br>High-speed digital input 2 complement                                                                     |
| B11 | Channel I<br>HsDigIN3<br>Clock<br>HsDigOUT1         | Digital/analog incremental encoder channel I<br>High-speed digital input 3<br>Clock (SSI)<br>High-speed digital output 1                                             |
| B12 | Channel I\<br>HsDigIN3\<br>Clock\<br>HsDigOUT1\<br> | Digital/analog incremental encoder channel I complement<br>High-speed digital input 3 complement<br>Clock (SSI) complement<br>High-speed digital output 1 complement |
| B13 | Data<br>HsDigIN4                                    | Data (SSI)<br>High-speed digital input 4                                                                                                                             |
| B14 | Data\<br>HsDigIN4\<br>                              | Data (SSI) complement<br>High-speed digital input 4 complement                                                                                                       |
| B15 | V <sub>Aux</sub>                                    | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA)                                                                                                            |
| B16 | GND                                                 | Ground                                                                                                                                                               |
| B17 | STO-IN1+                                            | Safe Torque Off input 1, positive signal                                                                                                                             |
| B18 | STO-IN1-                                            | Safe Torque Off input 1, negative signal                                                                                                                             |
| B19 | STO-IN2+                                            | Safe Torque Off input 2, positive signal                                                                                                                             |
| B20 | STO-IN2-                                            | Safe Torque Off input 2, negative signal                                                                                                                             |
| B21 | STO-OUT+                                            | Safe Torque Off output, positive signal                                                                                                                              |
| B22 | STO-OUT-                                            | Safe Torque Off output, negative signal                                                                                                                              |
| B23 | AnIN1+                                              | Analog input 1, positive signal                                                                                                                                      |
| B24 | AnIN1-                                              | Analog input 1, negative signal                                                                                                                                      |
| B25 | AnIN2+                                              | Analog input 2, positive signal                                                                                                                                      |
| B26 | AnIN2-                                              | Analog input 2, negative signal                                                                                                                                      |
| B27 | AnOUT1                                              | Analog output 1                                                                                                                                                      |
| B28 | AnOUT2                                              | Analog output 2                                                                                                                                                      |
| B29 | CAN ID 1                                            | CAN ID 1 (valence = 1)                                                                                                                                               |
| B30 | CAN ID 2                                            | CAN ID 2 (valence = 2)                                                                                                                                               |

Continued on next page.

| Pin                                      | Signal        | Description                                            |
|------------------------------------------|---------------|--------------------------------------------------------|
| B31                                      | CAN ID 3      | CAN ID 3 (valence = 4)                                 |
| B32                                      | CAN ID 4      | CAN ID 4 (valence = 8)                                 |
| B33                                      | CAN ID 5      | CAN ID 5 (valence = 16)                                |
| B34                                      | Auto bit rate | Automatic bit rate detection of CAN bus                |
| B35                                      | CAN high      | CAN high bus line                                      |
| B36                                      | CAN low       | CAN low bus line                                       |
| B37...B38                                | GND           | Ground                                                 |
| B39                                      | DSP_RxD       | Serial communication interface receive (UART)          |
| B40                                      | DSP_TxD       | Serial communication interface transmit (UART)         |
| B41 <sup>3)</sup>                        | SPI_CLK       | Serial Peripheral Interface clock                      |
| B42 <sup>3)</sup>                        | SPI_IRQ       | Serial Peripheral Interface interrupt request          |
| B43 <sup>3)</sup>                        | SPI_SOMI      | Serial Peripheral Interface Slave output, Master input |
| B44 <sup>3)</sup>                        | SPI_SIMO      | Serial Peripheral Interface Slave input, Master output |
| B45 <sup>3)</sup>                        | SPI_CS2       | Serial Peripheral Interface chip select 2              |
| B46 <sup>3)</sup>                        | SPI_CS1       | Serial Peripheral Interface chip select 1              |
| 3) only used for maxon extension modules |               |                                                        |

Table 3-10 Pin assignment B1...B46 (X6...X12)

### 3.3 Pin Assignment for Connector Boards & Compact Versions

As an alternative to developing an own motherboard, ready-made connector boards are available to combine the Module to Compact versions. They comprise all required connections.  
For in-depth details on connections → chapter “3.4 Connection Specifications” on page 3-42.

#### 3.3.1 EPOS4 CB Power CAN (520884) / EPOS4 Compact 50/15 CAN (520886)

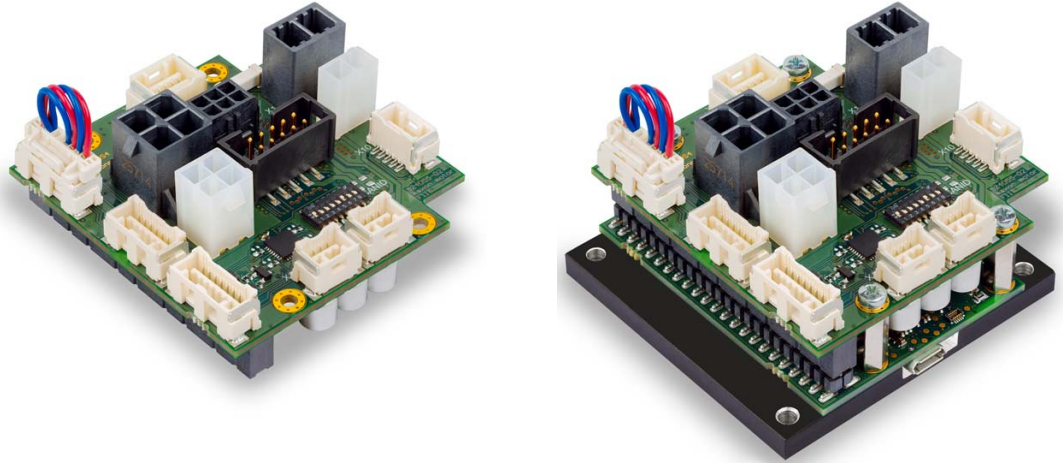


Figure 3-9 EPOS4 CB Power CAN (left) / EPOS4 Compact 50/15 CAN (right)

#### 3.3.2 Cabling

##### PLUG&PLAY

Take advantage of maxon's prefab cable assemblies. They come as ready-to-use parts and will help to reduce commissioning time to a minimum.

- Check the following table and find the part number of the cable assembly that matches the setup you will be using.
- Follow the cross-reference to get the cable's pin assignment.

| Connector | Prefab Cable Assembly                                                                                 |             |       |
|-----------|-------------------------------------------------------------------------------------------------------|-------------|-------|
|           | Designation                                                                                           | Part Number | →Page |
| X1        | Power Cable High Current<br><b>Mandatory for supply of power stage!</b>                               | 520850      | 3-26  |
| X2        | Power Cable<br><b>Optional for separate logic supply!</b> (for details → “Logic Supply” on page 3-43) | 275829      | 3-27  |
| X3a       | Motor Cable                                                                                           | 275851      | 3-29  |
| X3b       | Motor Cable High Current                                                                              | 520851      | 3-29  |
| X4        | Hall Sensor Cable                                                                                     | 275878      | 3-30  |
| X5        | Encoder Cable                                                                                         | 275934      | 3-31  |
| X6        | Sensor Cable 5x2core                                                                                  | 520852      | 3-33  |
| X7        | Signal Cable 8core                                                                                    | 520853      | 3-34  |
| X8        | Signal Cable 7core                                                                                    | 520854      | 3-35  |

Continued on next page.

| Connector | Prefab Cable Assembly                              |             |       |
|-----------|----------------------------------------------------|-------------|-------|
|           | Designation                                        | Part Number | →Page |
| X9        | Signal Cable 8core                                 | 520853      | 3-34  |
| X10       | RS232-COM Cable                                    | 520856      | 3-37  |
| X11       | CAN-COM Cable                                      | 520857      | 3-38  |
|           | CAN-CAN Cable                                      | 520858      | 3-38  |
| X12       | CAN-COM Cable                                      | 520857      | 3-38  |
|           | CAN-CAN Cable                                      | 520858      | 3-38  |
| X13       | USB Type A - micro B Cable (located at the Module) | 403968      | 3-73  |

Table 3-11 Prefab maxon cables

### MAKE&BAKE YOUR OWN

If you decide not to employ maxon motor's prefab cable assemblies, you might wish to use the prepackaged kit that contains all connectors required to make up your own cabling.

| EPOS4 Connector Set (520859) |                                                                 |          |
|------------------------------|-----------------------------------------------------------------|----------|
| Connector                    | Specification                                                   | Quantity |
| <b>Connectors</b>            |                                                                 |          |
| X1                           | Molex Mega-Fit, 2 poles (171692-0102)                           | 1        |
| X2                           | Molex Mini-Fit Jr., 2 poles (39-01-2020)                        | 2        |
| X3a                          | Molex Mini-Fit Jr., 4 poles (39-01-2040)                        | 1        |
| X3b                          | Molex Mega-Fit, 4 poles (171692-0104)                           | 1        |
| X4                           | Molex Micro-Fit 3.0, 6 poles (430-25-0600)                      | 1        |
| X6                           | Molex CLIK-Mate, dual row, 10 poles (503149-1000)               | 1        |
| X7 / X9                      | Molex CLIK-Mate, single row, 8 poles (502578-0800)              | 2        |
| X8                           | Molex CLIK-Mate, single row, 7 poles (502578-0700)              | 1        |
| X10                          | Molex CLIK-Mate, single row, 5 poles (502578-0500)              | 1        |
| X11 / X12                    | Molex CLIK-Mate, single row, 4 poles (502578-0400)              | 2        |
| <b>Crimp Terminals</b>       |                                                                 |          |
| X1 / X3b                     | Molex Mega-Fit, female crimp terminal (172063-0311)             | 7        |
| X2 / X3a                     | Molex Mini-Fit Jr. female crimp terminal (45750-1111)           | 9        |
| X4                           | Molex Micro-Fit 3.0 female crimp terminal (43030-0010)          | 7        |
| X6...X12                     | Molex CLIK-Mate crimp terminal (502579-0100)                    | 44       |
| <b>Accessories</b>           |                                                                 |          |
| X5                           | 3M Retainer Clip with strain relief, height 13.5 mm (3505-8110) | 1        |

Table 3-12 EPOS4 Connector Set – Content

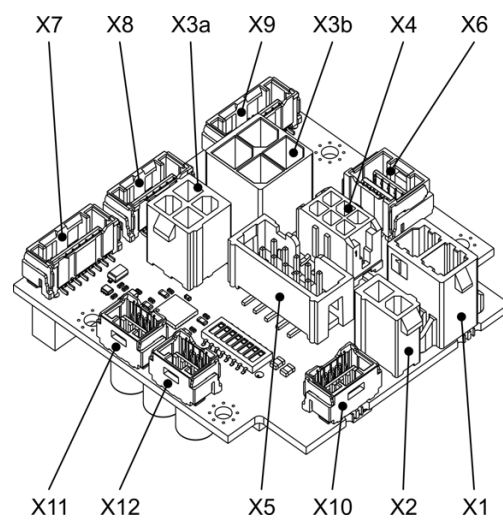
### 3.3.3 Tools

| Tool                                           | Manufacturer | Part Number |
|------------------------------------------------|--------------|-------------|
| Hand crimper for CLIK-Mate crimp terminals     | Molex        | 63819-4600  |
| Hand crimper for Micro-Fit 3.0 crimp terminals | Molex        | 63819-0000  |
| Hand crimper for Mega-Fit crimp terminals      | Molex        | 63825-7100  |
| Hand crimper for Mini-Fit crimp terminals      | Molex        | 63819-0900  |

Table 3-13 Recommended tools

### 3.3.4 Connections

The USB interface (X13) is located at the Module.



- X1 Power Supply →page 3-26
- X2 Logic Supply →page 3-27
- X3a Motor →page 3-28
- X3b Motor →page 3-28
- X4 Hall Sensor →page 3-30
- X5 Encoder →page 3-31
- X6 Sensor →page 3-32
- X7 Digital I/O →page 3-34
- X8 Analog I/O →page 3-35
- X9 STO →page 3-36
- X10 RS232 →page 3-37
- X11 CAN 1 →page 3-38
- X12 CAN 2 →page 3-38

Figure 3-10 EPOS4 CB Power CAN – Connectors



#### How to read pin assignment tables

- The first column describes both the pin number of the connector and of the matching prefab maxon cable's Head A.
- The second column describes the cable core color of the prefab maxon cable.
- The third column describes the pin number of the prefab maxon cable's Head B.

#### 3.3.4.1 Power Supply (X1)



##### Best practice

Keep the motor mechanically disconnected during the setup and adjustment phase.




Figure 3-11 Power supply connector X1

| X1<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal           | Description                                  |
|---------------------|--------------------------|---------------|------------------|----------------------------------------------|
| 1                   | black                    | –             | GND              | Ground                                       |
| 2                   | black                    | +             | +V <sub>CC</sub> | Nominal power supply voltage (+10...+50 VDC) |

Table 3-14 Power supply connector X1 – Pin assignment


| Power Cable High Current (520850)                                                                                                                   |                                      |                                                 |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------------|--|
| <div><div>A</div><div><div>2<br/>1</div></div><div>B</div></div> |                                      |                                                 |  |
| Cross-section                                                                                                                                       | 2 x 2.5 mm <sup>2</sup> , grey       |                                                 |  |
| Length                                                                                                                                              | 3 m                                  |                                                 |  |
| Head A                                                                                                                                              | Plug                                 | Molex Mega-Fit, 2 poles (171692-0102)           |  |
|                                                                                                                                                     | Contacts                             | Molex Mega-Fit, female crimp terminals (172063) |  |
| Head B                                                                                                                                              | Wire end sleeves 2.5 mm <sup>2</sup> |                                                 |  |

Table 3-15 Power Cable High Current

### 3.3.4.2 Logic Supply (X2)




Figure 3-12 Logic supply connector X2

| X2<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal          | Description                                  |
|---------------------|--------------------------|---------------|-----------------|----------------------------------------------|
| 1                   | black                    | –             | GND             | Ground                                       |
| 2                   | black                    | +             | +V <sub>C</sub> | Nominal logic supply voltage (+10...+50 VDC) |

Table 3-16 Logic supply connector X2 – Pin assignment

| Power Cable (275829)                                                        |                                       |                                                   |  |
|-----------------------------------------------------------------------------|---------------------------------------|---------------------------------------------------|--|
| <div><div><div>A</div><div><div>2<br/>1</div></div></div><div>B</div></div> |                                       |                                                   |  |
| Cross-section                                                               | 2 x 0.75 mm <sup>2</sup> , grey       |                                                   |  |
| Length                                                                      | 3 m                                   |                                                   |  |
| Head A                                                                      | Plug                                  | Molex Mini-Fit Jr., 2 poles (39-01-2020)          |  |
|                                                                             | Contacts                              | Molex Mini-Fit Jr. female crimp terminals (45750) |  |
| Head B                                                                      | Wire end sleeves 0.75 mm <sup>2</sup> |                                                   |  |

Table 3-17 Power Cable

#### 3.3.4.3 Motor (X3a) (X3b)

The controller is set to drive either maxon EC motor (BLDC, brushless DC motor) or maxon DC motor (brushed DC motor) with separated motor/encoder cable.



#### Maximum permitted current

The connectors are designed for the following output currents:

- X3a:  $I_{cont} \leq 11$  A
- X3b:  $I_{cont} \leq 15$  A




Figure 3-13 Motor connectors X3a (left) and X3b (right)

| X3a<br>X3b<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal       | Description       |
|-----------------------------|--------------------------|---------------|--------------|-------------------|
| 1                           | white                    |               | Motor (+M)   | DC motor: Motor + |
| 2                           | brown                    |               | Motor (–M)   | DC motor: Motor – |
| 3                           | green                    |               | –            | not connected     |
| 4                           | black                    |               | Motor shield | Cable shield      |

Table 3-18 Motor connector X3a / X3b – Pin assignment for maxon DC motor

| X3a<br>X3b<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal          | Description         |
|-----------------------------|--------------------------|---------------|-----------------|---------------------|
| 1                           | white                    |               | Motor winding 1 | EC motor: Winding 1 |
| 2                           | brown                    |               | Motor winding 2 | EC motor: Winding 2 |
| 3                           | green                    |               | Motor winding 3 | EC motor: Winding 3 |
| 4                           | black                    |               | Motor shield    | Cable shield        |

Table 3-19 Motor connector X3a / X3b – Pin assignment for maxon EC motor

Continued on next page.


| Motor Cable for X3a (275851)                                                                                                                                                                                                                                                        |                                           |                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/>  </div> <div style="text-align: center;"> <b>B</b> </div> </div> |                                           |                                                   |
| Cross-section                                                                                                                                                                                                                                                                       | 3 x 0.75 mm <sup>2</sup> , shielded, grey |                                                   |
| Length                                                                                                                                                                                                                                                                              | 3 m                                       |                                                   |
| Head A                                                                                                                                                                                                                                                                              | Plug                                      | Molex Mini-Fit Jr., 4 poles (39-01-2040)          |
|                                                                                                                                                                                                                                                                                     | Contacts                                  | Molex Mini-Fit Jr. female crimp terminals (45750) |
| Head B                                                                                                                                                                                                                                                                              | Wire end sleeves 0.75 mm <sup>2</sup>     |                                                   |

Table 3-20 Motor Cable


| Motor Cable High Current for X3b (520851)                                                                                                                                                                                                                                            |                                          |                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-------------------------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/>  </div> <div style="text-align: center;"> <b>B</b> </div> </div> |                                          |                                                 |
| Cross-section                                                                                                                                                                                                                                                                        | 3 x 2.5 mm <sup>2</sup> , shielded, grey |                                                 |
| Length                                                                                                                                                                                                                                                                               | 3 m                                      |                                                 |
| Head A                                                                                                                                                                                                                                                                               | Plug                                     | Molex Mega-Fit, 4 poles (171692-0104)           |
|                                                                                                                                                                                                                                                                                      | Contacts                                 | Molex Mega-Fit, female crimp terminals (172063) |
| Head B                                                                                                                                                                                                                                                                               | Wire end sleeves 2.5 mm <sup>2</sup>     |                                                 |

Table 3-21 Motor Cable High Current

### 3.3.4.4 Hall Sensor (X4)




Figure 3-14 Hall sensor connector X4

| X4 Head A Pin | Prefab Cable Color | Head B Pin | Signal              | Description                                             |
|---------------|--------------------|------------|---------------------|---------------------------------------------------------|
| 1             | green              |            | Hall sensor 1       | Hall sensor 1 input                                     |
| 2             | brown              |            | Hall sensor 2       | Hall sensor 2 input                                     |
| 3             | white              |            | Hall sensor 3       | Hall sensor 3 input                                     |
| 4             | yellow             |            | GND                 | Ground                                                  |
| 5             | grey               |            | V <sub>Sensor</sub> | Sensor supply voltage (+5 VDC; I <sub>L</sub> ≤ 100 mA) |
| 6             | black              |            | Hall shield         | Cable shield                                            |

Table 3-22 Hall sensor connector X4 – Pin assignment

| Hall Sensor Cable (275878)                                                                                                                                                                                      |                                           |                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|----------------------------------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/> <br/> 4<br/>1 </div> <div style="text-align: center;"> <b>B</b> </div> </div> |                                           |                                                          |
| Cross-section                                                                                                                                                                                                   | 5 x 0.14 mm <sup>2</sup> , shielded, grey |                                                          |
| Length                                                                                                                                                                                                          | 3 m                                       |                                                          |
| Head A                                                                                                                                                                                                          | Plug                                      | Molex Micro-Fit 3.0, 6 poles (430-25-0600)               |
|                                                                                                                                                                                                                 | Contacts                                  | Molex Micro-Fit 3.0 female crimp terminals (430-30-xxxx) |
| Head B                                                                                                                                                                                                          | Wire end sleeves 0.14 mm <sup>2</sup>     |                                                          |

Table 3-23 Hall Sensor Cable

### 3.3.4.5 Encoder (X5)




Figure 3-15 Encoder connector X5

| X5 Head A Pin | Prefab Cable Color | Head B Pin | Signal              | Description                                                |
|---------------|--------------------|------------|---------------------|------------------------------------------------------------|
| 1             | brown              | 1          | –                   | not connected                                              |
| 2             | white              | 2          | $V_{\text{Sensor}}$ | Sensor supply voltage (+5 VDC; $I_L \leq 100 \text{ mA}$ ) |
| 3             | red                | 3          | GND                 | Ground                                                     |
| 4             | white              | 4          | –                   | not connected                                              |
| 5             | orange             | 5          | Channel A\          | Channel A complement                                       |
| 6             | white              | 6          | Channel A           | Channel A                                                  |
| 7             | yellow             | 7          | Channel B\          | Channel B complement                                       |
| 8             | white              | 8          | Channel B           | Channel B                                                  |
| 9             | green              | 9          | Channel I\          | Channel I complement                                       |
| 10            | white              | 10         | Channel I           | Channel I                                                  |

Table 3-24 Encoder connector X5 – Pin assignment

| Accessories            |          |                                                                                      |
|------------------------|----------|--------------------------------------------------------------------------------------|
| Suitable strain relief | Retainer | For sockets with strain relief:<br>1 retainer clip, height 13.5 mm, 3M (3505-8110)   |
|                        |          | For sockets without strain relief:<br>1 retainer clip, height 7.9 mm, 3M (3505-8010) |
|                        | Latch    | For sockets with strain relief: 2 pieces, 3M (3505-33B)                              |

Table 3-25 Encoder connector X5 – Accessories

| Encoder Cable (275934)                                                                                                                                                                                |                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/> </div> <div style="text-align: center;"> <b>B</b><br/> </div> </div> |                                                                        |
| Cross-section                                                                                                                                                                                         | 10 x AWG28, round-jacket, twisted pair flat cable, pitch 1.27 mm, grey |
| Length                                                                                                                                                                                                | 3.2 m                                                                  |
| Head A                                                                                                                                                                                                | DIN 41651 female, pitch 2.54 mm, 10 poles, with strain relief          |
| Head B                                                                                                                                                                                                | DIN 41651 plug, pitch 2.54 mm, 10 poles, with strain relief            |

Table 3-26 Encoder Cable

### 3.3.4.6 Sensor (X6)

Additional sensors, both incremental and serial encoders, can be connected.




Figure 3-16 Sensor connector X6

| X6<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal                                              | Description                                                                                                                                                             |
|---------------------|--------------------------|---------------|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                   | white                    | 1             | Channel A<br>HsDigIN1                               | Digital/analog incremental encoder channel A<br>High-speed digital input 1                                                                                              |
| 2                   | brown                    | 2             | Channel A\<br>HsDigIN1\<br>                         | Digital/analog incremental encoder channel A<br>complement<br>High-speed digital input 1 complement                                                                     |
| 3                   | green                    | 3             | Channel B<br>HsDigIN2                               | Digital/analog incremental encoder channel B<br>High-speed digital input 2                                                                                              |
| 4                   | yellow                   | 4             | Channel B\<br>HsDigIN2\<br>                         | Digital/analog incremental encoder channel B<br>complement<br>High-speed digital input 2 complement                                                                     |
| 5                   | grey                     | 5             | Channel I<br>HsDigIN3<br>Clock<br>HsDigOUT1         | Digital/analog incremental encoder channel I<br>High-speed digital input 3<br>Clock (SSI)<br>High-speed digital output 1                                                |
| 6                   | pink                     | 6             | Channel I\<br>HsDigIN3\<br>Clock\<br>HsDigOUT1\<br> | Digital/analog incremental encoder channel I<br>complement<br>High-speed digital input 3 complement<br>Clock (SSI) complement<br>High-speed digital output 1 complement |
| 7                   | blue                     | 7             | Data<br>HsDigIN4                                    | Data (SSI)<br>High-speed digital input 4                                                                                                                                |
| 8                   | red                      | 8             | Data\<br>HsDigIN4\<br>                              | Data (SSI) complement<br>High-speed digital input 4 complement                                                                                                          |
| 9                   | black                    | 9             | GND                                                 | Ground                                                                                                                                                                  |
| 10                  | violet                   | 10            | V <sub>Aux</sub>                                    | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA)                                                                                                               |

Table 3-27 Sensor connector X6 – Pin assignment

Continued on next page.


| Sensor Cable 5x2core (520852)                                                                                                                                                                                                                                                       |                                                   |                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/>  </div> <div style="text-align: center;"> <b>B</b> </div> </div> |                                                   |                                                   |
| Cross-section                                                                                                                                                                                                                                                                       | 5 x 2 x 0.14 mm <sup>2</sup> , twisted pair, grey |                                                   |
| Length                                                                                                                                                                                                                                                                              | 3 m                                               |                                                   |
| Head A                                                                                                                                                                                                                                                                              | Plug                                              | Molex CLIK-Mate, dual row, 10 poles (503149-1000) |
|                                                                                                                                                                                                                                                                                     | Contacts                                          | Molex CLIK-Mate crimp terminals (502579)          |
| Head B                                                                                                                                                                                                                                                                              | Wire end sleeves 0.14 mm <sup>2</sup>             |                                                   |

Table 3-28      Sensor Cable 5x2core

### 3.3.4.7 Digital I/O (X7)




Figure 3-17 Digital I/O connector X7

| X7 Head A Pin | Prefab Cable Color | Head B Pin | Signal           | Description                                               |
|---------------|--------------------|------------|------------------|-----------------------------------------------------------|
| 1             | white              | 1          | DigIN1           | Digital input 1                                           |
| 2             | brown              | 2          | DigIN2           | Digital input 2                                           |
| 3             | green              | 3          | DigIN3           | Digital input 3                                           |
| 4             | yellow             | 4          | DigIN4           | Digital input 4                                           |
| 5             | grey               | 5          | DigOUT1          | Digital output 1                                          |
| 6             | pink               | 6          | DigOUT2          | Digital output 2                                          |
| 7             | blue               | 7          | GND              | Ground                                                    |
| 8             | red                | 8          | V <sub>Aux</sub> | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA) |

Table 3-29 Digital I/O connector X7 – Pin assignment

| Signal Cable 8core (520853)                                                                                                                                                                                     |                                       |                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|----------------------------------------------------|
| <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="text-align: center;"> <b>A</b><br/> <br/> 8<br/>1 </div> <div style="text-align: center;"> <b>B</b> </div> </div> |                                       |                                                    |
| Cross-section                                                                                                                                                                                                   | 8 x 0.14 mm <sup>2</sup> , grey       |                                                    |
| Length                                                                                                                                                                                                          | 3 m                                   |                                                    |
| Head A                                                                                                                                                                                                          | Plug                                  | Molex CLIK-Mate, single row, 8 poles (502578-0800) |
|                                                                                                                                                                                                                 | Contacts                              | Molex CLIK-Mate crimp terminals (502579)           |
| Head B                                                                                                                                                                                                          | Wire end sleeves 0.14 mm <sup>2</sup> |                                                    |

Table 3-30 Signal Cable 8core

### 3.3.4.8 Analog I/O (X8)




Figure 3-18 Analog I/O connector X8

| X8 Head A Pin | Prefab Cable Color | Head B Pin | Signal | Description                     |
|---------------|--------------------|------------|--------|---------------------------------|
| 1             | white              | 1          | AnIN1+ | Analog input 1, positive signal |
| 2             | brown              | 2          | AnIN1– | Analog input 1, negative signal |
| 3             | green              | 3          | AnIN2+ | Analog input 2, positive signal |
| 4             | yellow             | 4          | AnIN2– | Analog input 2, negative signal |
| 5             | grey               | 5          | AnOUT1 | Analog output 1                 |
| 6             | pink               | 6          | AnOUT2 | Analog output 2                 |
| 7             | blue               | 7          | GND    | Ground                          |

Table 3-31 Analog I/O connector X8 – Pin assignment


| Signal Cable 7core (520854)                                                                                                       |                           |                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------------------------------|
| <div><div>A</div><div></div><div>B</div></div> |                           |                                                    |
| Cross-section                                                                                                                     | 7 x 0.14 mm², grey        |                                                    |
| Length                                                                                                                            | 3 m                       |                                                    |
| Head A                                                                                                                            | Plug                      | Molex CLIK-Mate, single row, 7 poles (502578-0700) |
|                                                                                                                                   | Contacts                  | Molex CLIK-Mate crimp terminals (502579)           |
| Head B                                                                                                                            | Wire end sleeves 0.14 mm² |                                                    |

Table 3-32 Signal Cable 7core

### 3.3.4.9 STO (X9)




Figure 3-19 STO connector X9



#### Activation of power stage

In order to activate the power stage, either **both** STO inputs must be powered or the «STO Idle Connector» (→Table 3-34; included with every Compact version delivery) must be plugged.

| X9<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal           | Description                                                                                              |
|---------------------|--------------------------|---------------|------------------|----------------------------------------------------------------------------------------------------------|
| 1                   | white                    | 1             | STO-IN1+         | Safe Torque Off input 1, positive signal                                                                 |
| 2                   | brown                    | 2             | STO-IN1–         | Safe Torque Off input 1, negative signal                                                                 |
| 3                   | green                    | 3             | STO-IN2+         | Safe Torque Off input 2, positive signal                                                                 |
| 4                   | yellow                   | 4             | STO-IN2–         | Safe Torque Off input 2, negative signal                                                                 |
| 5                   | grey                     | 5             | STO-OUT+         | Safe Torque Off output, positive signal                                                                  |
| 6                   | pink                     | 6             | STO-OUT–         | Safe Torque Off output, negative signal                                                                  |
| 7                   | blue                     | 7             | GND              | Ground                                                                                                   |
| 8                   | red                      | 8             | V <sub>STO</sub> | Activation voltage for STO inputs (+5 VDC)<br><b>Note:</b> Do not use this voltage for any other purpose |

Table 3-33 STO connector X9 – Pin assignment

For the matching prefab cable assembly →Table 3-30 on page 3-34.

| STO Idle Connector (520860)<br>—included with every Compact version delivery— |                                                                       |
|-------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|                                                                               |                                                                       |
| Plug                                                                          | Molex CLIK-Mate, single row, 8 poles (502578-0800) with cable bridges |

Table 3-34 STO Idle Connector

### 3.3.4.10 RS232 (X10)




Figure 3-20 RS232 connector X10

| X10<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal   | Description         |
|----------------------|--------------------------|---------------|----------|---------------------|
| 1                    | white                    | 3             | EPOS_RxD | EPOS RS232 receive  |
| 2                    | brown                    | 5             | GND      | Ground              |
| 3                    | green                    | 2             | EPOS_TxD | EPOS RS232 transmit |
| 4                    | yellow                   | 5             | GND      | Ground              |
| 5                    | Shield                   | Housing       | Shield   | Cable shield        |

Table 3-35 RS232 connector X10 – Pin assignment



| RS232-COM Cable (520856)                                                                                                                                                                                  |                                                                 |                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------|
| <div><div></div><div></div></div> |                                                                 |                                                    |
| Cross-section                                                                                                                                                                                             | 2 x 2 x 0.14 mm <sup>2</sup> , twisted pair, shielded           |                                                    |
| Length                                                                                                                                                                                                    | 3 m                                                             |                                                    |
| Head A                                                                                                                                                                                                    | Plug                                                            | Molex CLIK-Mate, single row, 5 poles (502578-0500) |
|                                                                                                                                                                                                           | Contacts                                                        | Molex CLIK-Mate crimp terminals (502579)           |
| Head B                                                                                                                                                                                                    | Female D-Sub connector DIN 41652, 9 poles, with mounting screws |                                                    |

Table 3-36 RS232-COM Cable

### 3.3.4.11 CAN 1 (X11) CAN 2 (X12)




Figure 3-21 CAN 1 connector X11 and CAN 2 connector X12

| X11/12<br>Head A<br>Pin | Prefab<br>Cable<br>Color | Head B<br>Pin | Signal   | Description       |
|-------------------------|--------------------------|---------------|----------|-------------------|
| 1                       | white                    | 7             | CAN high | CAN high bus line |
| 2                       | brown                    | 2             | CAN low  | CAN low bus line  |
| 3                       | green                    | 3             | GND      | Ground            |
| 4                       | Shield                   | 5             | Shield   | Cable shield      |

Table 3-37 CAN 1 connector X11/CAN 2 connector X12 – Pin assignment


| CAN-COM Cable (520857)                                                                                                                                                                                                          |                                                                 |                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------|
| <div><div><div>A</div></div><div><div>B</div></div></div> |                                                                 |                                                    |
| Cross-section                                                                                                                                                                                                                   | 2 x 2 x 0.14 mm <sup>2</sup> , twisted pair, shielded           |                                                    |
| Length                                                                                                                                                                                                                          | 3 m                                                             |                                                    |
| Head A                                                                                                                                                                                                                          | Plug                                                            | Molex CLIK-Mate, single row, 4 poles (502578-0400) |
|                                                                                                                                                                                                                                 | Contacts                                                        | Molex CLIK-Mate crimp terminals (502579)           |
| Head B                                                                                                                                                                                                                          | Female D-Sub connector DIN 41652, 9 poles, with mounting screws |                                                    |

Table 3-38 CAN-COM Cable



| CAN-CAN Cable (520858)                                                                                                                                                                                    |                                                       |                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|----------------------------------------------------|
| <div><div></div><div></div></div> |                                                       |                                                    |
| Cross-section                                                                                                                                                                                             | 2 x 2 x 0.14 mm <sup>2</sup> , twisted pair, shielded |                                                    |
| Length                                                                                                                                                                                                    | 3 m                                                   |                                                    |
| Head A                                                                                                                                                                                                    | Plug                                                  | Molex CLIK-Mate, single row, 4 poles (502578-0400) |
|                                                                                                                                                                                                           | Contacts                                              | Molex CLIK-Mate crimp terminals (502579)           |
| Head B                                                                                                                                                                                                    | Plug                                                  | Molex CLIK-Mate, single row, 4 poles (502578-0400) |
|                                                                                                                                                                                                           | Contacts                                              | Molex CLIK-Mate crimp terminals (502579)           |

Table 3-39 CAN-CAN Cable

3.3.5 DIP Switch Configuration (SW1)

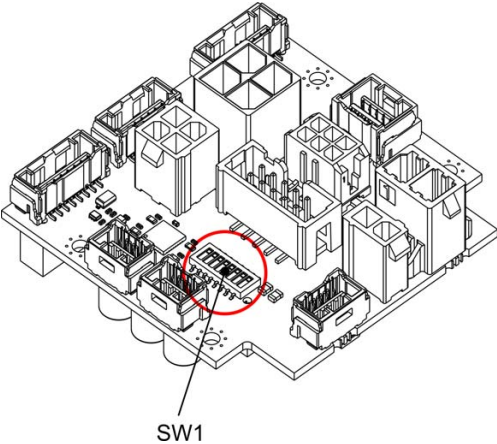


Figure 3-22 EPOS4 CB Power CAN – DIP switch SW1

3.3.5.1 CAN ID (Node Address)

The CAN ID is set with DIP switches 1...5. The node address (1...31) may be coded using binary code.



Setting the CAN ID by DIP switch SW1

- By setting the DIP switch (1...5) address 0 ("OFF"), the CAN ID may be set by software (changing object "Node ID", range 1...127).
- The CAN ID results in the summed values of DIP switch addresses 1 ("ON").
- DIP switches 6...8 do not have any impact on the CAN ID.


| Switch | Binary Code    | Valence | Setting                                                                                                    |
|--------|----------------|---------|------------------------------------------------------------------------------------------------------------|
| 1      | 2 <sup>0</sup> | 1       | <br>(factory setting) |
| 2      | 2 <sup>1</sup> | 2       |                                                                                                            |
| 3      | 2 <sup>2</sup> | 4       |                                                                                                            |
| 4      | 2 <sup>3</sup> | 8       |                                                                                                            |
| 5      | 2 <sup>4</sup> | 16      |                                                                                                            |

Table 3-40 DIP switch SW1 – Binary code values

Continued on next page.

The set CAN ID (node address) can be observed by adding the valence of all activated switches. Use the following table as a (non-concluding) guide:









| Setting                                                                                       | Switch |   |   |   |   | Node Address |
|-----------------------------------------------------------------------------------------------|--------|---|---|---|---|--------------|
|                                                                                               | 1      | 2 | 3 | 4 | 5 |              |
|  ON<br>OFF   | 0      | 0 | 0 | 0 | 0 | –            |
|  ON<br>OFF   | 1      | 0 | 0 | 0 | 0 | 1            |
|  ON<br>OFF   | 0      | 1 | 0 | 0 | 0 | 2            |
|  ON<br>OFF   | 0      | 0 | 1 | 0 | 0 | 4            |
|  ON<br>OFF  | 1      | 0 | 1 | 0 | 0 | 5            |
|  ON<br>OFF | 0      | 0 | 0 | 1 | 0 | 8            |
|  ON<br>OFF | 0      | 0 | 0 | 0 | 1 | 16           |
|  ON<br>OFF | 1      | 1 | 1 | 1 | 1 | 31           |
| 0 = Switch "OFF"      1 = Switch "ON"                                                         |        |   |   |   |   |              |

Table 3-41 DIP switch SW1 – Examples

### 3.3.5.2 CAN automatic Bit Rate Detection



| Switch | OFF                                                                                                                                       | ON                                                                                                                                                          |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6      |  ON<br>OFF<br>Automatic bit rate detection deactivated |  ON<br>OFF<br>Automatic bit rate detection activated (factory setting) |

Table 3-42 DIP switch SW1 – CAN automatic bit rate detection

### 3.3.5.3 CAN Bus Termination



| Switch | OFF                                                                                                                                    | ON                                                                                                                                      |
|--------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 7      |  <p>Without bus termination<br/>(factory setting)</p> |  <p>Bus termination with 120 <math>\Omega</math></p> |

Table 3-43 DIP switch SW1 – CAN bus termination

### 3.3.5.4 Digital Input Level

For details → chapter “3.4.7 Digital I/Os” on page 3-59.


| Switch | OFF                                                                                                                        | ON                                                                                                   |
|--------|----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 8      |  <p>Logic level<br/>(factory setting)</p> |  <p>PLC level</p> |

Table 3-44 DIP switch SW1 – Digital input level

### 3.3.6 Spare Parts

| Order number | Description           |
|--------------|-----------------------|
| 520860       | STO Idle Connector X9 |

Table 3-45 Spare parts list

### 3.4 Connection Specifications

The actual connection will depend on the overall configuration of your drive system and the type of motor you will be using. Follow the description in given order and choose the wiring diagram (→ as of page 5-83) that best suits the components you are using.



#### How to read the following data

The following tables feature, where applicable, connection details for both versions the Module and the Compact. Thereby,...

- the column «Module Header Pin» refers to the header's pin number.  
Example: **A13...A16** means header A, pins 13 thru 16
- the column «Compact/CB Connector Pin» refers to the connector's pin number.  
Example: **X1 | 2** means connector X1, pin 2

For easier legibility, the subsequently used circuit diagrams refer to the Module. For the corresponding Compact's circuitry take the second column «Compact/CB Connector Pin» into account.

#### 3.4.1 Power Supply

Basically, any power supply may be used provided that it meets the below stated minimum requirements.

| Module Header Pin                                                    | Compact/CB Connector Pin | Signal           | Description                                  |
|----------------------------------------------------------------------|--------------------------|------------------|----------------------------------------------|
| A13...A16**                                                          | X1   2                   | +V <sub>CC</sub> | Nominal power supply voltage (+10...+50 VDC) |
| A18...A22**                                                          | X1   1                   | GND              | Ground                                       |
| ** Connect all pins in respect to the individual pin current rating. |                          |                  |                                              |

Table 3-46 Power supply – Pin assignment

| Power supply requirements |                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Output voltage            | +V <sub>CC</sub> 10...50 VDC                                                                                                                    |
| Absolute output voltage   | min. 8 VDC; max. 56 VDC                                                                                                                         |
| Output current            | Depending on load <ul style="list-style-type: none"> <li>continuous max. 15 A</li> <li>short-time (acceleration, &lt;60 s) max. 30 A</li> </ul> |

- Use the formula below to calculate the required voltage under load.
- Choose a power supply according to the calculated voltage. Thereby consider:
  - During braking of the load, the power supply must be capable of buffering the recovered kinetic energy (for example, in a capacitor).
  - If you are using an electronically stabilized power supply, make sure that the overcurrent protection circuit is configured inoperative within the operating range.

Continued on next page.



**The formula already takes the following into account:**

- Maximum PWM duty cycle of 90%
- Controller's max. voltage drop of 1 V @ 15 A

**KNOWN VALUES:**

- Operating torque M [mNm]
- Operating speed n [rpm]
- Nominal motor voltage  $U_N$  [Volt]
- Motor no-load speed at  $U_N$ ;  $n_O$  [rpm]
- Speed/torque gradient of the motor  $\Delta n/\Delta M$  [rpm/mNm]

**SOUGHT VALUE:**

- Supply voltage  $+V_{CC}$  [Volt]

**SOLUTION:**

$$V_{CC} \geq \left[ \frac{U_N}{n_O} \cdot \left( n + \frac{\Delta n}{\Delta M} \cdot M \right) \cdot \frac{1}{0.9} \right] + 1 [V]$$

### 3.4.2 Logic Supply



**Separate power supply**

The logic part of the controller may be supplied by a separate supply voltage provided that it meets the below stated minimum requirements.

For the voltage supply observe the following:

- **Module:**  
You will need to provide both, logic supply and power supply.
- **Compact:**  
**Either** use two cables, the «Power Cable» (275829) to provide the logic supply and the «Power Cable High Current» (520850) to provide the power supply.  
**Or** use just one cable, the «Power Cable High Current» (520850) to provide the power supply. In this case, the logic supply is internally connected to the power supply voltage.

| Module Header Pin                                                    | Compact/CB Connector Pin | Signal | Description                                  |
|----------------------------------------------------------------------|--------------------------|--------|----------------------------------------------|
| A17                                                                  | X2   2                   | $+V_C$ | Nominal logic supply voltage (+10...+50 VDC) |
| A18...A22**                                                          | X2   1                   | GND    | Ground                                       |
| ** Connect all pins in respect to the individual pin current rating. |                          |        |                                              |

Table 3-47 Logic supply – Pin assignment

| Power supply requirements |                         |
|---------------------------|-------------------------|
| Output voltage            | $+V_C$ 10...50 VDC      |
| Absolute supply voltage   | min. 8 VDC; max. 56 VDC |
| Min. output power         | $P_C$ min. 3.5 W        |

### 3.4.3 Motor

The EPOS4 is set to drive either maxon DC motors (brushed) or maxon EC motors (brushless).

| Module Header Pin                                                    | Compact/CB Connector Pin | Signal       | Description   |
|----------------------------------------------------------------------|--------------------------|--------------|---------------|
| A1...A4**                                                            | X3a   1<br>X3b   1       | Motor (+M)   | Motor +       |
| A5...A8**                                                            | X3a   2<br>X3b   2       | Motor (-M)   | Motor -       |
| –                                                                    | X3a   3<br>X3b   3       | –            | not connected |
| –                                                                    | X3a   4<br>X3b   4       | Motor shield | Cable shield  |
| ** Connect all pins in respect to the individual pin current rating. |                          |              |               |

Table 3-48 DC motor – Pin assignment

| Module Header Pin                                                    | Compact/CB Connector Pin | Signal          | Description  |
|----------------------------------------------------------------------|--------------------------|-----------------|--------------|
| A1...A4**                                                            | X3a   1<br>X3b   1       | Motor winding 1 | Winding 1    |
| A5...A8**                                                            | X3a   2<br>X3b   2       | Motor winding 2 | Winding 2    |
| A9...A12**                                                           | X3a   3<br>X3b   3       | Motor winding 3 | Winding 3    |
| –                                                                    | X3a   4<br>X3b   4       | Motor shield    | Cable shield |
| ** Connect all pins in respect to the individual pin current rating. |                          |                 |              |

Table 3-49 EC motor – Pin assignment

### 3.4.4 Hall Sensor

| Module Header Pin | Compact/CB Connector Pin | Signal              | Description                                                |
|-------------------|--------------------------|---------------------|------------------------------------------------------------|
| A18...A22         | X4   4                   | GND                 | Ground                                                     |
| A23               | X4   1                   | Hall sensor 1       | Hall sensor 1 input                                        |
| A24               | X4   2                   | Hall sensor 2       | Hall sensor 2 input                                        |
| A25               | X4   3                   | Hall sensor 3       | Hall sensor 3 input                                        |
| A26               | X4   5                   | $V_{\text{Sensor}}$ | Sensor supply voltage (+5 VDC; $I_L \leq 100 \text{ mA}$ ) |
| –                 | X4   6                   | Hall shield         | Cable shield                                               |

Table 3-50 Hall sensor – Pin assignment

| Hall sensor                                   |                                       |
|-----------------------------------------------|---------------------------------------|
| Sensor supply voltage ( $V_{\text{Sensor}}$ ) | +5 VDC                                |
| Max. Hall sensor supply current               | 30 mA                                 |
| Input voltage                                 | 0...24 VDC                            |
| Max. input voltage                            | +24 VDC                               |
| Logic 0                                       | typically <0.8 V                      |
| Logic 1                                       | typically >2.0 V                      |
| Internal pull-up resistor                     | 10 k $\Omega$ (referenced to +5.45 V) |

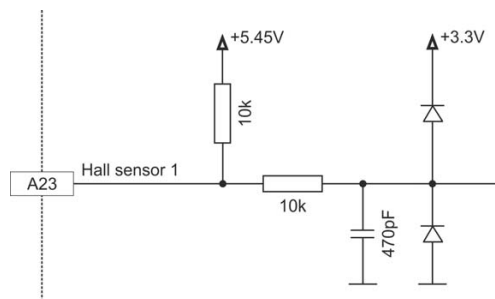


Figure 3-23 Hall sensor 1 input circuit (analogously valid for Hall sensors 2 & 3)

## 3.4.5 Encoder

**Best practice**

- Differential signals offer good resistance against electrical interference. Therefore, **we recommend using a differential scheme**. Nevertheless, the controller supports both schemes – differential and single-ended (unsymmetrical).
- For best performance, **we strongly recommend using encoders with a line driver**. Otherwise, limitations may apply due to slow switching edges.
- Even though 2-channel will do, **we strongly recommend to use only 3-channel versions**.

| Module Header Pin | Compact/CB Connector Pin | Signal                 | Description                                             |
|-------------------|--------------------------|------------------------|---------------------------------------------------------|
| A18...A22         | X5   3                   | GND                    | Ground                                                  |
| A26               | X5   2                   | V <sub>Sensor</sub>    | Sensor supply voltage (+5 VDC; I <sub>L</sub> ≤ 100 mA) |
| A27               | X5   6                   | Channel A              | Digital incremental encoder channel A                   |
| A28               | X5   5                   | Channel A <sub>I</sub> | Digital incremental encoder channel A complement        |
| A29               | X5   8                   | Channel B              | Digital incremental encoder channel B                   |
| A30               | X5   7                   | Channel B <sub>I</sub> | Digital incremental encoder channel B complement        |
| A31               | X5   10                  | Channel I              | Digital incremental encoder channel I                   |
| A32               | X5   9                   | Channel I <sub>I</sub> | Digital incremental encoder channel I complement        |

Table 3-51 Encoder – Pin assignment

| Encoder (differential)                       |                    |
|----------------------------------------------|--------------------|
| Sensor supply voltage (V <sub>Sensor</sub> ) | +5 VDC             |
| Max. encoder supply current                  | 70 mA              |
| Min. differential input voltage              | ±200 mV            |
| Max. input voltage                           | ±12 VDC            |
| Line receiver (internal)                     | EIA RS422 standard |
| Max. input frequency                         | 6.25 MHz           |

Continued on next page.

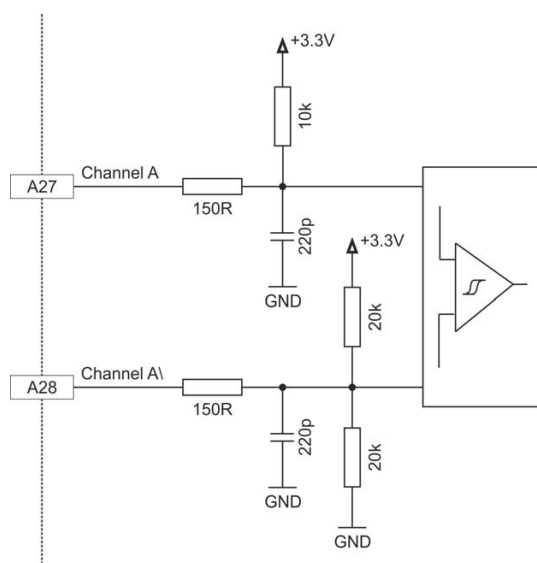


Figure 3-24 Encoder input circuit Ch A “differential” (analogously valid for Ch B & Ch I)

| Encoder (single-ended)                        |                                                      |                                           |
|-----------------------------------------------|------------------------------------------------------|-------------------------------------------|
| Sensor supply voltage ( $V_{\text{Sensor}}$ ) | +5 VDC                                               |                                           |
| Max. encoder supply current                   | 70 mA                                                |                                           |
| Input voltage                                 | 0...5 VDC                                            |                                           |
| Max. input voltage                            | $\pm 12$ VDC                                         |                                           |
| Logic 0                                       | <1.0 V                                               |                                           |
| Logic 1                                       | >2.4 V                                               |                                           |
| Input high current                            | $I_{\text{IH}}$ = typically +420 $\mu\text{A}$ @ 5 V |                                           |
| Input low current                             | $I_{\text{IL}}$ = typically -170 $\mu\text{A}$ @ 0 V |                                           |
| Max. input frequency                          | Push-pull                                            | Open collector                            |
|                                               | 6.25 MHz                                             | 40 kHz (internal pull-up only)            |
|                                               |                                                      | 150 kHz (additional external 3k3 pull-up) |

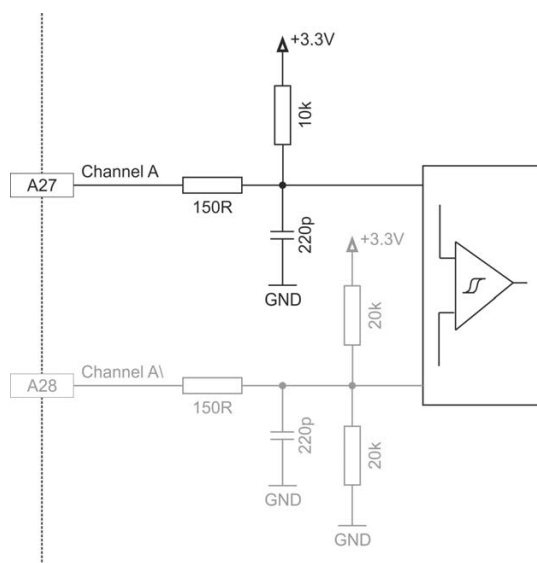


Figure 3-25 Encoder input circuit Ch A “single-ended” (analogously valid for Ch B & Ch I)

### 3.4.6 Sensor



#### Check on the applied sensor's data sheet

If the specified inrush current or the maximum continuous current of the sensor should exceed 150 mA, you can connect the sensor supply voltage ( $V_{\text{Sensor}}$ ) in parallel to the auxiliary output voltage ( $V_{\text{Aux}}$ ).

#### 3.4.6.1 Incremental Encoder

| Module Header Pin | Compact/CB Connector Pin | Signal           | Description                                             |
|-------------------|--------------------------|------------------|---------------------------------------------------------|
| B7                | X6   1                   | Channel A        | Digital/analog incremental encoder channel A            |
| B8                | X6   2                   | Channel A\       | Digital/analog incremental encoder channel A complement |
| B9                | X6   3                   | Channel B        | Digital/analog incremental encoder channel B            |
| B10               | X6   4                   | Channel B\       | Digital/analog incremental encoder channel B complement |
| B11               | X6   5                   | Channel I        | Digital/analog incremental encoder channel I            |
| B12               | X6   6                   | Channel I\       | Digital/analog incremental encoder channel I complement |
| B15               | X6   10                  | $V_{\text{Aux}}$ | Auxiliary output voltage (+5 VDC; $I_L \leq 150$ mA)    |
| B16               | X6   9                   | GND              | Ground                                                  |

Table 3-52 Incremental encoder – Pin assignment

| Digital incremental encoder (differential)    |                    |
|-----------------------------------------------|--------------------|
| Auxiliary output voltage ( $V_{\text{Aux}}$ ) | +5 VDC             |
| Max. auxiliary supply current                 | 150 mA             |
| Min. differential input voltage               | $\pm 200$ mV       |
| Max. input voltage                            | +12 VDC            |
| Line receiver (internal)                      | EIA RS422 standard |
| Max. input frequency                          | 6.25 MHz           |

Continued on next page.

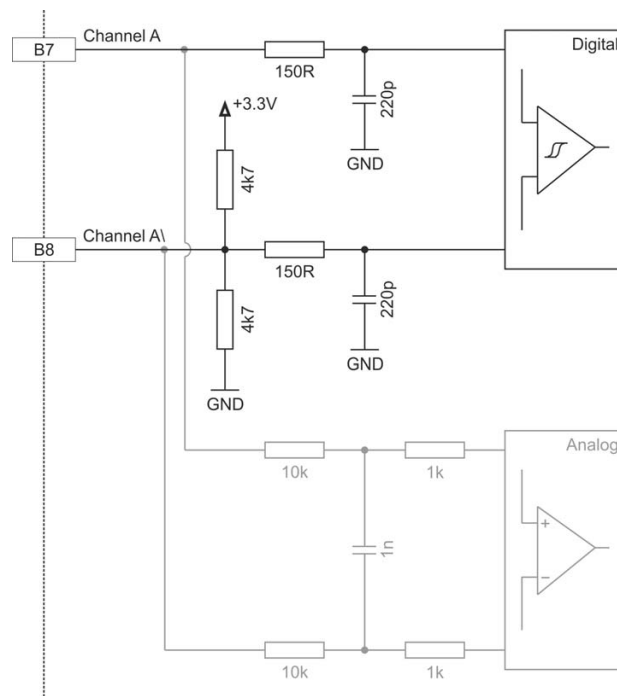


Figure 3-26 Digital incremental encoder input circuit Ch A "differential" (analogously valid for Ch B)

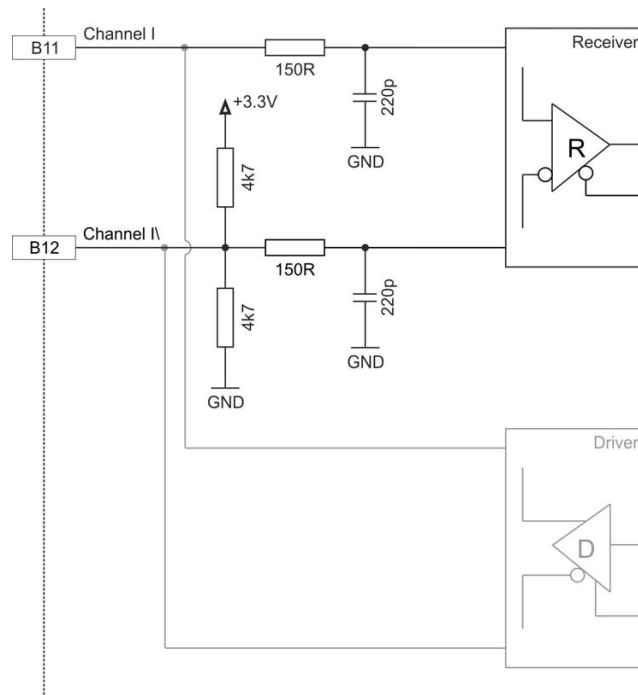


Figure 3-27 Digital incremental encoder input circuit Ch I

| Digital incremental encoder (single-ended) |                                                                                            |                                           |
|--------------------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------|
| Auxiliary output voltage ( $V_{AUX}$ )     | +5 VDC                                                                                     |                                           |
| Max. auxiliary supply current              | 150 mA                                                                                     |                                           |
| Input voltage                              | 0...5 VDC                                                                                  |                                           |
| Max. input voltage                         | $\pm 12$ VDC                                                                               |                                           |
| Logic 0                                    | <1.0 V                                                                                     |                                           |
| Logic 1                                    | >2.4 V                                                                                     |                                           |
| Input high current                         | typically 210 $\mu$ A @ +5 VDC (channel A, B)<br>typically 60 $\mu$ A @ +5 VDC (channel I) |                                           |
| Input low current                          | typically -80 $\mu$ A @ 0 VDC (channel A, B)<br>typically -7 $\mu$ A @ 0 VDC (channel I)   |                                           |
| Max. input frequency                       | Push-pull                                                                                  | Open collector                            |
|                                            | 6.25 MHz                                                                                   | 100 kHz (additional external 3k3 pull-up) |

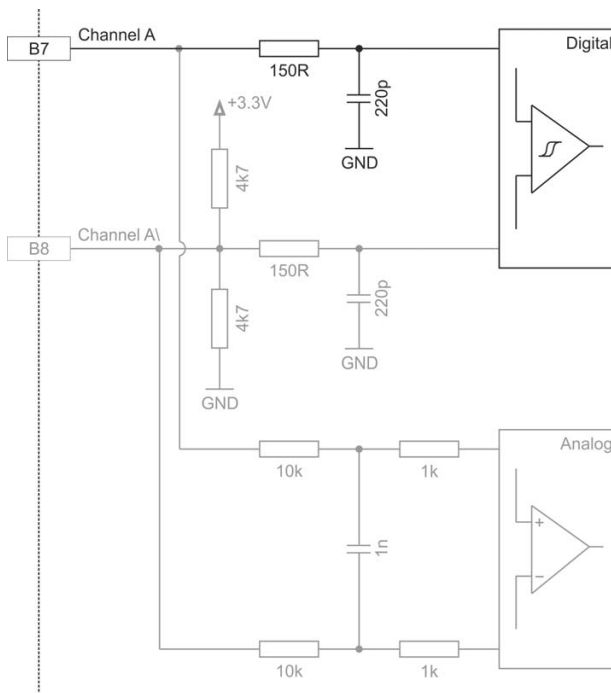


Figure 3-28 Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B)

Continued on next page.

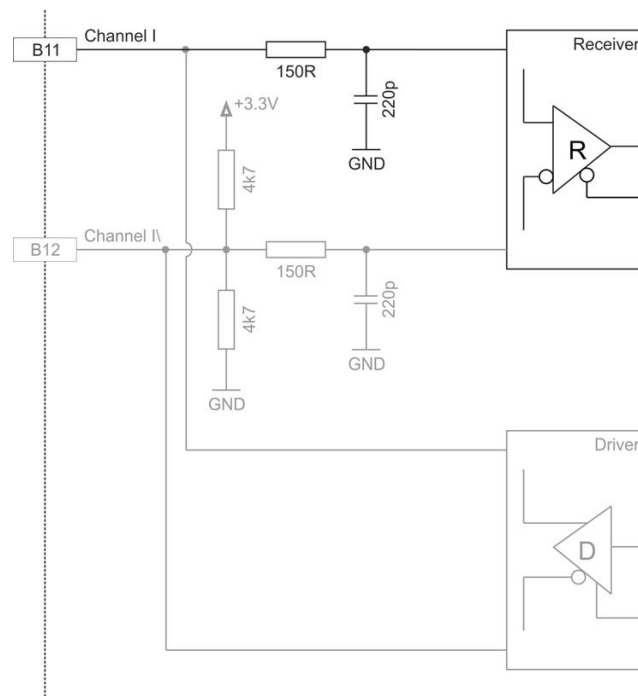


Figure 3-29 Digital incremental encoder input circuit Ch I

| Analog incremental encoder (differential) |                                       |
|-------------------------------------------|---------------------------------------|
| Auxiliary output voltage ( $V_{AUX}$ )    | +5 VDC                                |
| Max. auxiliary supply current             | 150 mA                                |
| Input voltage                             | $\pm 1.8$ V (differential)            |
| Max. input voltage                        | $\pm 12$ VDC                          |
| Common mode voltage                       | $-9 \dots +4$ VDC (referenced to GND) |
| Input resistance                          | typically 10 k $\Omega$               |
| A/D converter                             | 12-bit                                |
| Resolution                                | 0.88 mV                               |
| Bandwidth                                 | 10 kHz                                |

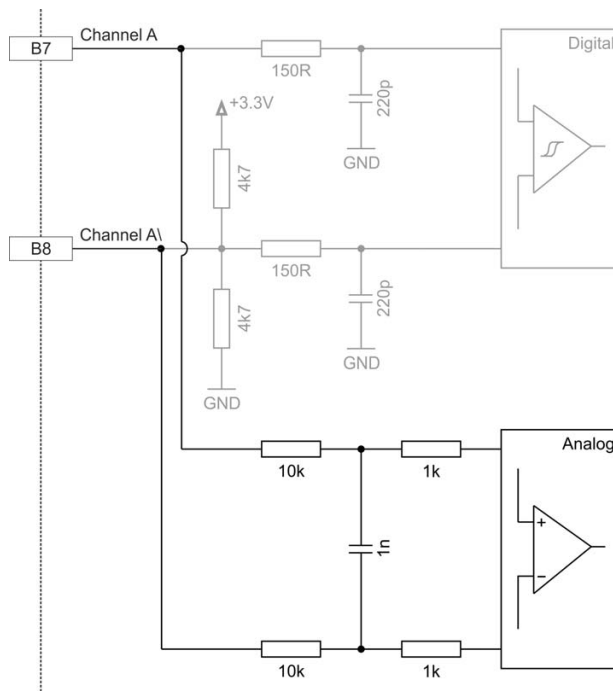


Figure 3-30 Analog incremental encoder input circuit Ch A “differential” (analogously valid for Ch B)

Continued on next page.

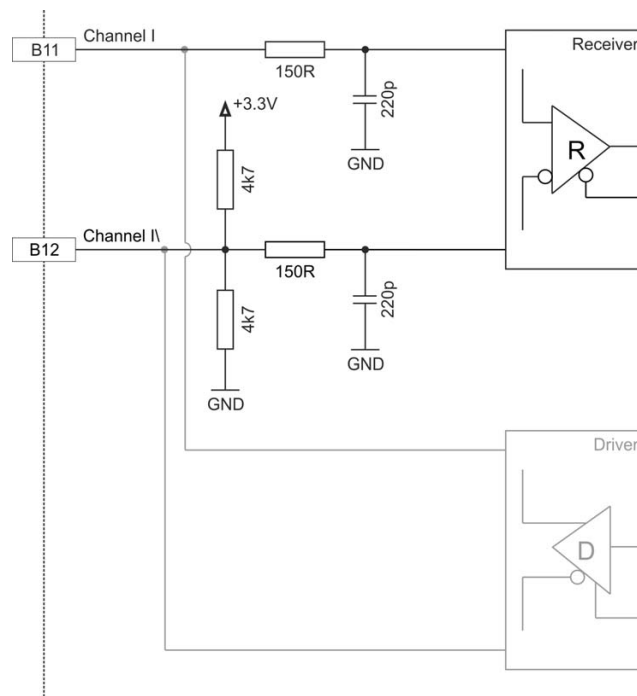


Figure 3-31 Analog incremental encoder input circuit Ch I (digital evaluation)

### 3.4.6.2 SSI Absolute Encoder

| Module Header Pin | Compact/CB Connector Pin | Signal           | Description                                               |
|-------------------|--------------------------|------------------|-----------------------------------------------------------|
| B11               | X6   5                   | Clock            | Clock (SSI)                                               |
| B12               | X6   6                   | Clock\           | Clock (SSI) complement                                    |
| B13               | X6   7                   | Data             | Data (SSI)                                                |
| B14               | X6   8                   | Data\            | Data (SSI) complement                                     |
| B15               | X6   10                  | V <sub>Aux</sub> | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA) |
| B16               | X6   9                   | GND              | Ground                                                    |

Table 3-53 SSI absolute encoder – Pin assignment

| SSI absolute encoder                         |                               |
|----------------------------------------------|-------------------------------|
| Auxiliary output voltage (V <sub>Aux</sub> ) | +5 VDC                        |
| Max. auxiliary supply current                | 150 mA                        |
| Min. differential input voltage              | ±200 mV                       |
| Min. differential output voltage             | ±1.8 V @ external load R=54 Ω |
| Max. output current                          | 40 mA                         |
| Line receiver (internal)                     | EIA RS422 standard            |
| Max. encoder input/output frequency          | 5 MHz                         |

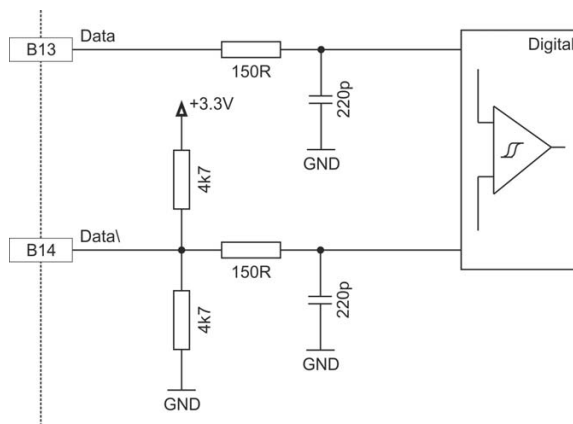


Figure 3-32 SSI absolute encoder data input

Continued on next page.

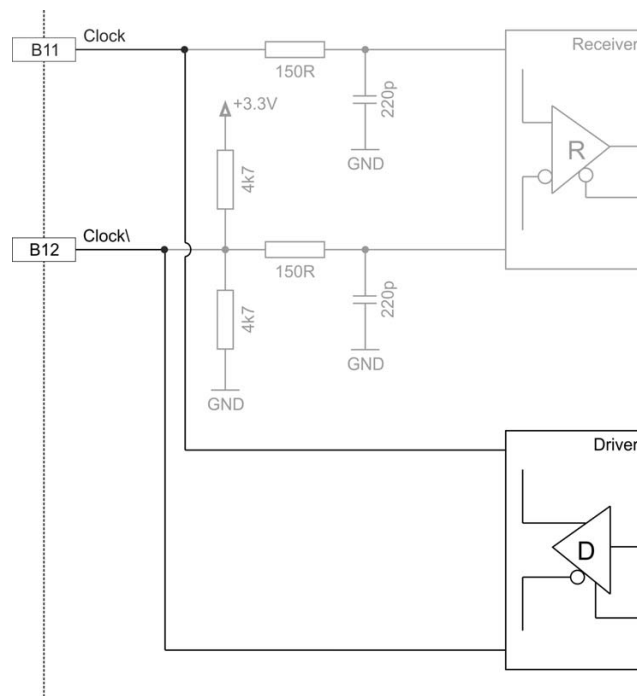


Figure 3-33 SSI absolute encoder clock output

### 3.4.6.3 High-speed Digital I/Os

Alternatively, the sensor interface can be used for high-speed digital I/O operation.

| Module Header Pin | Compact/CB Connector Pin | Signal                  | Description                                                                     |
|-------------------|--------------------------|-------------------------|---------------------------------------------------------------------------------|
| B7                | X6   1                   | HsDigIN1                | High-speed digital input 1                                                      |
| B8                | X6   2                   | HsDigIN1\               | High-speed digital input 1 complement                                           |
| B9                | X6   3                   | HsDigIN2                | High-speed digital input 2                                                      |
| B10               | X6   4                   | HsDigIN2\               | High-speed digital input 2 complement                                           |
| B11               | X6   5                   | HsDigIN3<br>HsDigOUT1   | High-speed digital input 3<br>High-speed digital output 1                       |
| B12               | X6   6                   | HsDigIN3\<br>HsDigOUT1\ | High-speed digital input 3 complement<br>High-speed digital output 1 complement |
| B13               | X6   7                   | HsDigIN4                | High-speed digital input 4                                                      |
| B14               | X6   8                   | HsDigIN4\               | High-speed digital input 4 complement                                           |
| B15               | X6   10                  | V <sub>Aux</sub>        | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA)                       |
| B16               | X6   9                   | GND                     | Ground                                                                          |

Table 3-54 High-speed digital I/Os – Pin assignment

| High-speed digital input 1...4 (differential) |                    |
|-----------------------------------------------|--------------------|
| Max. input voltage                            | ±12 VDC            |
| Min. differential input voltage               | ±200 mV            |
| Line receiver (internal)                      | EIA RS422 standard |
| Max. input frequency                          | 6.25 MHz           |

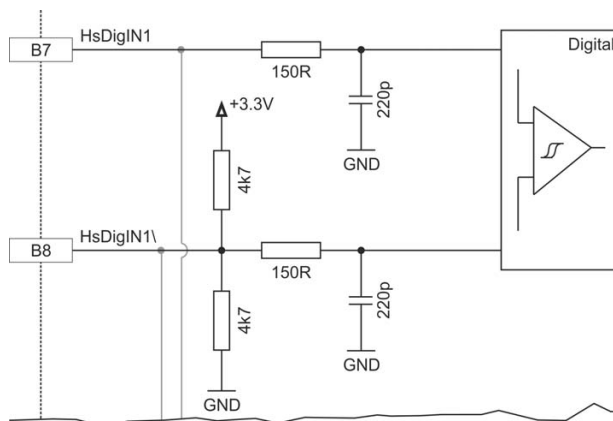


Figure 3-34 HsDigIN1 circuit “differential” (analogously valid for HsDigIN2...4)

| High-speed digital input 1...4 (single-ended) |                                                                                                         |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Input voltage                                 | 0...5 VDC                                                                                               |
| Max. input voltage                            | ±12 VDC                                                                                                 |
| Logic 0                                       | <1.0 V                                                                                                  |
| Logic 1                                       | >2.4 V                                                                                                  |
| Input high current                            | typically 210 $\mu\text{A}$ @ +5 VDC (HsDigIN1, 2)<br>typically 60 $\mu\text{A}$ @ +5 VDC (HsDigIN3, 4) |
| Input low current                             | typically -80 $\mu\text{A}$ @ 0 VDC (HsDigIN1, 2)<br>typically -7 $\mu\text{A}$ @ 0 VDC (HsDigIN3, 4)   |
| Max. input frequency                          | 6.25 MHz                                                                                                |

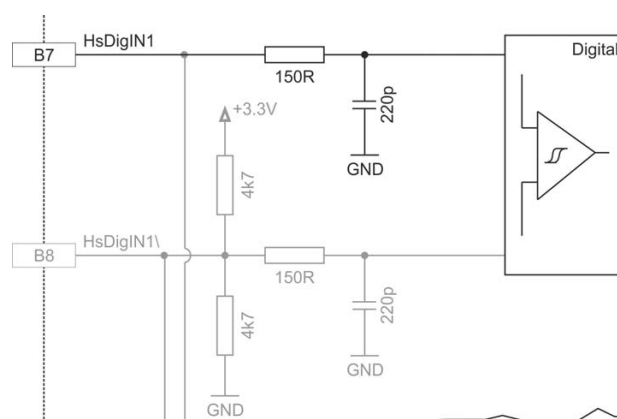


Figure 3-35 HsDigIN1 circuit "single-ended" (analogously valid for HsDigIN2...4)

| High-speed digital output 1      |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Min. differential output voltage | $\pm 1.8 \text{ V @ external load } R=54 \text{ } \Omega$ |
| Max. output current              | 40 mA                                                     |
| Line transceiver (internal)      | EIA RS422 standard                                        |
| Max. output frequency            | 6.25 MHz                                                  |

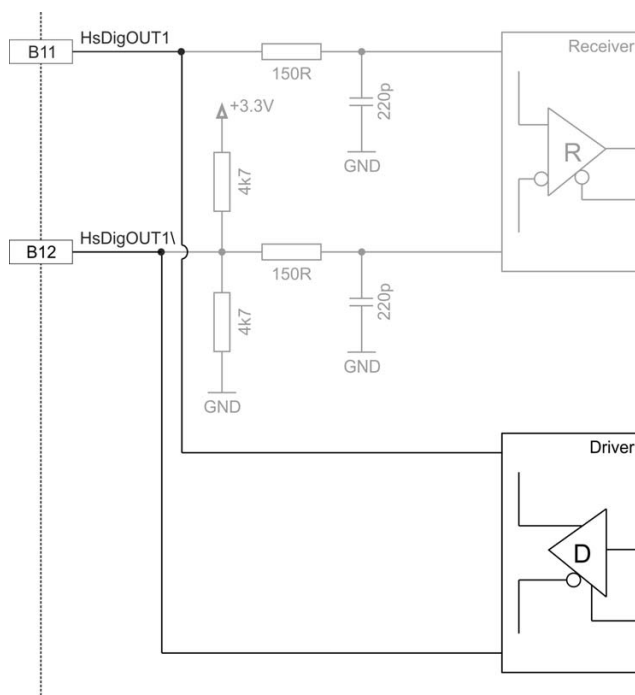


Figure 3-36 HsDigOUT1 output circuit

### 3.4.7 Digital I/Os

#### MODULE

| Module Header Pin | Signal           | Description                                               |
|-------------------|------------------|-----------------------------------------------------------|
| B1                | DigIN1           | Digital input 1                                           |
| B2                | DigIN2           | Digital input 2                                           |
| B3                | DigIN3           | Digital input 3                                           |
| B4                | DigIN4           | Digital input 4                                           |
| B5                | DigOUT1          | Digital output 1                                          |
| B6                | DigOUT2          | Digital output 2                                          |
| B15               | V <sub>Aux</sub> | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA) |
| B16               | GND              | Ground                                                    |

Table 3-55 Digital I/Os – Pin assignment – Module

| Digital inputs 1...4 (Module) |                                                                                     |
|-------------------------------|-------------------------------------------------------------------------------------|
| Input voltage                 | 0...36 VDC                                                                          |
| Max. input voltage            | ±36 VDC                                                                             |
| Logic 0                       | <0.8 V                                                                              |
| Logic 1                       | >2.1 V                                                                              |
| Input resistance              | typically 47 kΩ (<3.3 V)<br>typically 37.5 kΩ (@ 5 V)<br>typically 25.5 kΩ (@ 24 V) |
| Input current at logic 1      | typically 135 μA @ +5 VDC                                                           |
| Switching delay               | <300 μs                                                                             |

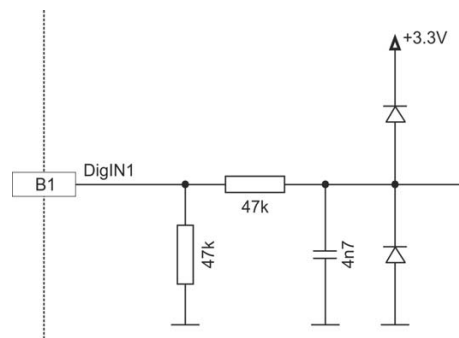


Figure 3-37 DigIN1 circuit (analogously valid for DigIN2...4) – Module

## COMPACT

| Compact/CB Connector Pin | Signal           | Description                                               |
|--------------------------|------------------|-----------------------------------------------------------|
| X7   1                   | DigIN1           | Digital input 1                                           |
| X7   2                   | DigIN2           | Digital input 2                                           |
| X7   3                   | DigIN3           | Digital input 3                                           |
| X7   4                   | DigIN4           | Digital input 4                                           |
| X7   5                   | DigOUT1          | Digital output 1                                          |
| X7   6                   | DigOUT2          | Digital output 2                                          |
| X7   7                   | GND              | Ground                                                    |
| X7   8                   | V <sub>Aux</sub> | Auxiliary output voltage (+5 VDC; I <sub>L</sub> ≤150 mA) |

Table 3-56 Digital I/Os – Pin assignment – Compact

| Digital inputs 1...4 (Compact / Logic level setting) |                 |
|------------------------------------------------------|-----------------|
| Input voltage                                        | 0...30 VDC      |
| Max. input voltage                                   | ±30 VDC         |
| Logic 0                                              | <0.8 V          |
| Logic 1                                              | >2.0 V          |
| Input current at logic 1                             | 250 µA @ 5 VDC  |
| Switching delay                                      | <300 µs @ 5 VDC |

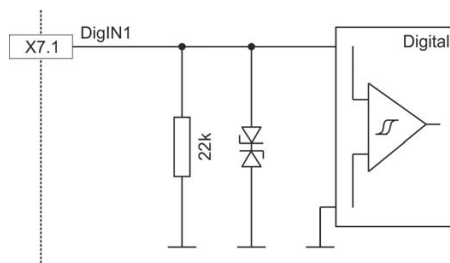


Figure 3-38 DigIN1 circuit (analogously valid for DigIN2...4) – Compact / Logic level setting

Continued on next page.

| Digital inputs 1...4 (Compact / PLC level setting) |                                            |
|----------------------------------------------------|--------------------------------------------|
| Input voltage                                      | 0...30 VDC                                 |
| Max. input voltage                                 | ±30 VDC                                    |
| Logic 0                                            | <5.5 V                                     |
| Logic 1                                            | >9 V                                       |
| Input current at logic 1                           | >2 mA @ 9 VDC<br>typically 3.5 mA @ 24 VDC |
| Switching delay                                    | <300 µs @ 24 VDC                           |

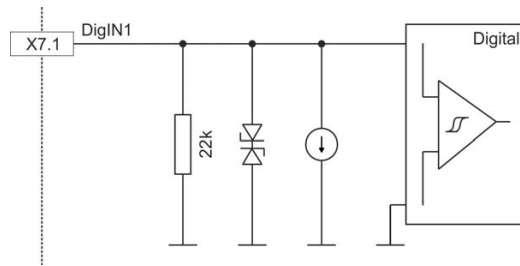


Figure 3-39 DigIN1 circuit (analogously valid for DigIN2...4) – Compact / PLC level setting

For pin assignment of digital outputs → Table 3-55 and Table 3-56.

| Digital outputs 1...2 |                                                                  |
|-----------------------|------------------------------------------------------------------|
| Circuit               | Open drain (internal pull-up resistor 2k2 and diode to +5.45 VDC |

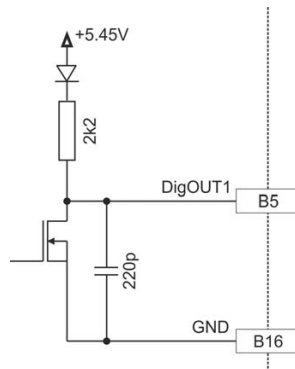


Figure 3-40 DigOUT1 circuit (analogously valid for DigOUT2 and Compact)

Continued on next page.

## WIRING EXAMPLES

| DigOUT “sinks”       |                         |
|----------------------|-------------------------|
| Max. input voltage   | +36 VDC                 |
| Max. load current    | 500 mA                  |
| Max. voltage drop    | 0.5 V @ 500 mA          |
| Max. load inductance | 100 mH @ 24 VDC; 500 mA |

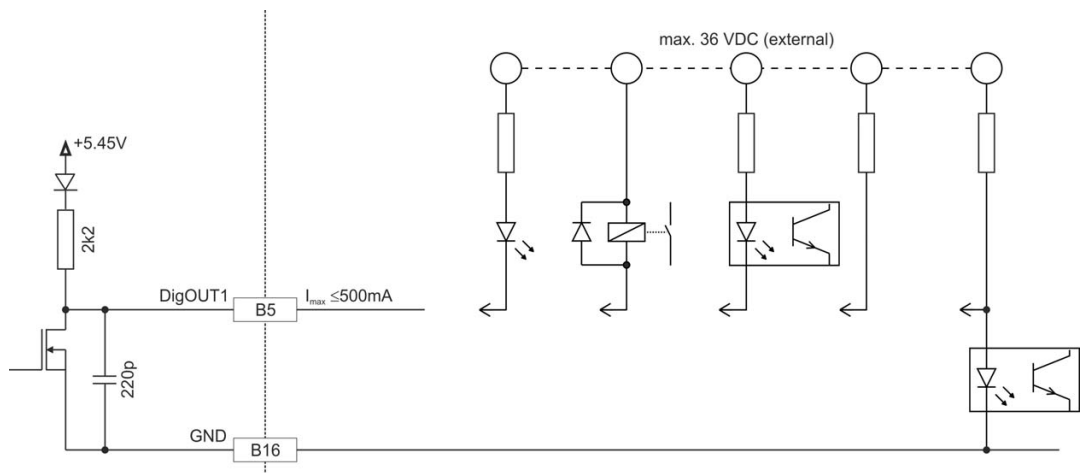


Figure 3-41 DigOUT1 “sinks” (analogously valid for DigOUT2 and Compact)

| DigOUT “source”   |                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------|
| Output voltage    | $U_{\text{Out}} = 5.45 \text{ V} - 0.75 \text{ V} - (I_{\text{Load}} \times 2200 \Omega)$ |
| Max. load current | $I_{\text{Load}} \leq 2 \text{ mA}$                                                       |

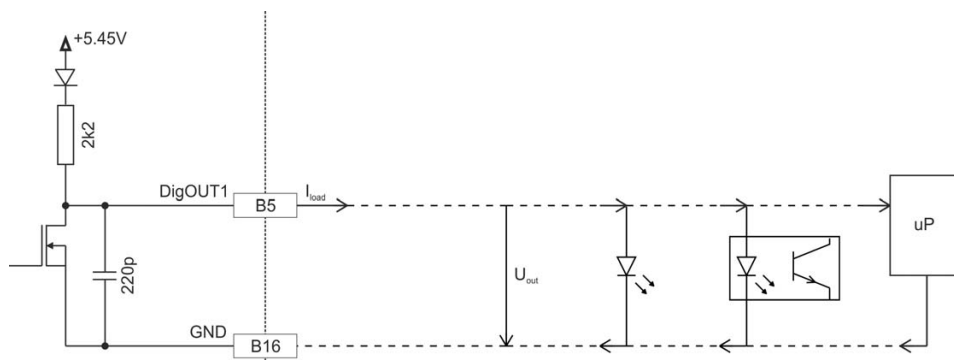


Figure 3-42 DigOUT1 “source” (analogously valid for DigOUT2 and Compact)

### 3.4.8 Safe Torque Off I/Os

The STO (Safe Torque Off) function can be utilized to bring the drive to a torque-free, safe condition via two independent inputs. The drive output power stage is switched off if either one of the inputs is not powered.

For in-depth details on the STO functionality → separate document «EPOS4 Application Notes».



#### Activation of power stage

In order to activate the power stage, **both** STO inputs must be powered.

| Module Header Pin | Compact/CB Connector Pin | Signal    | Description                                                                                              |
|-------------------|--------------------------|-----------|----------------------------------------------------------------------------------------------------------|
| –                 | X9   8                   | $V_{STO}$ | Activation voltage for STO inputs (+5 VDC)<br><b>Note:</b> Do not use this voltage for any other purpose |
| B15               | –                        | $V_{Aux}$ | Auxiliary output voltage (+5 VDC; $I_L \leq 150$ mA)                                                     |
| B16               | X9   7                   | GND       | Ground                                                                                                   |
| B17               | X9   1                   | STO-IN1+  | Safe Torque Off input 1, positive signal                                                                 |
| B18               | X9   2                   | STO-IN1–  | Safe Torque Off input 1, negative signal                                                                 |
| B19               | X9   3                   | STO-IN2+  | Safe Torque Off input 2, positive signal                                                                 |
| B20               | X9   4                   | STO-IN2–  | Safe Torque Off input 2, negative signal                                                                 |
| B21               | X9   5                   | STO-OUT+  | Safe Torque Off output, positive signal                                                                  |
| B22               | X9   6                   | STO-OUT–  | Safe Torque Off output, negative signal                                                                  |

Table 3-57 STO I/Os – Pin assignment

| Safe Torque Off inputs 1...2 |                                            |
|------------------------------|--------------------------------------------|
| Circuit type                 | Optically isolated input                   |
| Input voltage                | 0...+30 VDC                                |
| Max. input voltage           | ±30 VDC                                    |
| Logic 0                      | <1.0 VDC                                   |
| Logic 1                      | >4.5 VDC                                   |
| Input current at logic 1     | >2 mA @ 5 VDC<br>typically 3.2 mA @ 24 VDC |
| Reaction time                | <25 ms                                     |

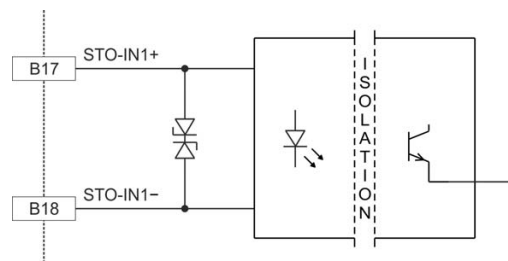


Figure 3-43 STO-IN1 circuit (analogously valid for STO-IN2)

| Safe Torque Off output |                                                                        |
|------------------------|------------------------------------------------------------------------|
| Circuit type           | Optically isolated output with self-resetting short-circuit protection |
| Max. input voltage     | ±30 VDC                                                                |
| Max. load current      | 15 mA                                                                  |
| Leakage current        | <10 µA @ +30 VDC                                                       |
| Max. voltage drop      | 1.3 V @ 2 mA<br>2.5 V @ 15 mA                                          |

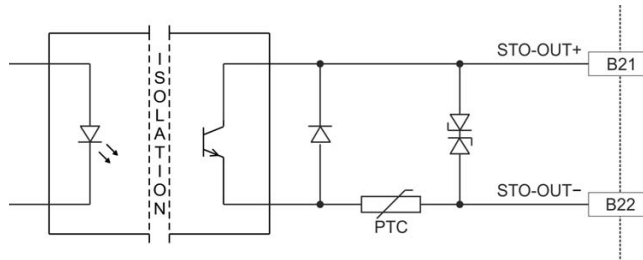


Figure 3-44 STO-OUT circuit

| STO Logic State |         |         |             |
|-----------------|---------|---------|-------------|
| STO-IN1         | STO-IN2 | STO-OUT | Power Stage |
| 0               | 0       | open    | inactive    |
| 1               | 0       | closed  | inactive    |
| 0               | 1       | closed  | inactive    |
| 1               | 1       | closed  | active      |

Table 3-58 STO logic state

### 3.4.9 Analog I/Os

| Module Header Pin | Compact/CB Connector Pin | Signal | Description                     |
|-------------------|--------------------------|--------|---------------------------------|
| B16               | X8   7                   | GND    | Ground                          |
| B23               | X8   1                   | AnIN1+ | Analog input 1, positive signal |
| B24               | X8   2                   | AnIN1- | Analog input 1, negative signal |
| B25               | X8   3                   | AnIN2+ | Analog input 2, positive signal |
| B26               | X8   4                   | AnIN2- | Analog input 2, negative signal |
| B27               | X8   5                   | AnOUT1 | Analog output 1                 |
| B28               | X8   6                   | AnOUT2 | Analog output 2                 |

Table 3-59 Analog I/Os – Pin assignment

| Analog inputs 1...2 |                                                   |
|---------------------|---------------------------------------------------|
| Input voltage       | ±10 VDC (differential)                            |
| Max. input voltage  | ±24 VDC                                           |
| Common mode voltage | –5...+10 VDC (referenced to GND)                  |
| Input resistance    | 80 kΩ (differential)<br>65 kΩ (referenced to GND) |
| A/D converter       | 12-bit                                            |
| Resolution          | 5.64 mV                                           |
| Bandwidth           | 10 kHz                                            |

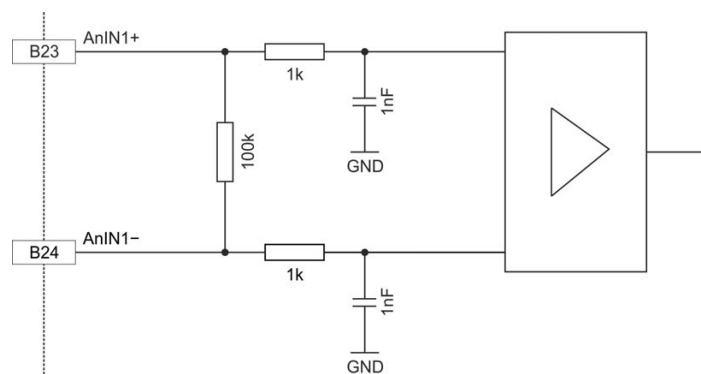


Figure 3-45 AnIN1 circuit (analogously valid for AnIN2)

| Analog outputs 1...2                 |                                                                                                                 |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Output voltage                       | ±4 VDC                                                                                                          |
| D/A converter                        | 12-bit                                                                                                          |
| Resolution                           | 2.42 mV                                                                                                         |
| Refresh rate                         | 2.5 kHz                                                                                                         |
| Analog bandwidth of output amplifier | 25 kHz                                                                                                          |
| Max. capacitive load                 | 300 nF<br><b>Note:</b> The increase rate is limited in proportion to the capacitive load (e.g. 5 V/ms @ 300 nF) |
| Max. output current limit            | 1 mA                                                                                                            |

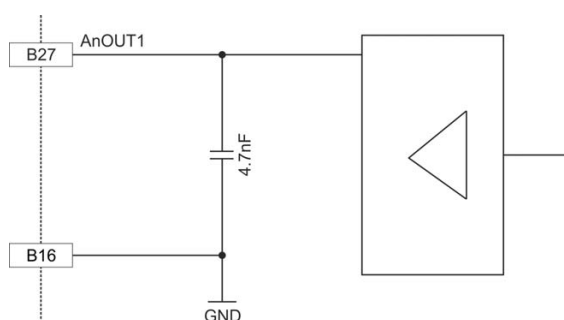


Figure 3-46 AnOUT1 circuit (analogously valid for AnOUT2)

**3.4.10 Serial Communication Interface (SCI) / RS232**

The SCI is a two-wire asynchronous serial port, commonly known as a UART. The SCI modules support digital communication between the CPU and other asynchronous peripherals that use the standard non-return-to-zero (NRZ) format.

A common use of the Module's SCI is to build an RS232 interface by wiring it to an RS232 transceiver. Alternatively, using any of the Compact versions does not require an external transceiver.

**Bit rate settings**

- Consider the master's maximal bite rate.
- The standard bit rate setting (factory setting) is 115'200 bit/s.

**MODULE**

| Module Header Pin | Signal  | Description                                    |
|-------------------|---------|------------------------------------------------|
| B38               | GND     | Ground                                         |
| B39               | DSP_RxD | Serial communication interface receive (UART)  |
| B40               | DSP_TxD | Serial communication interface transmit (UART) |

Table 3-60 SCI – Pin assignment

| Serial Communication Interface (SCI) |                          |
|--------------------------------------|--------------------------|
| Input voltage                        | 0...3.3 VDC              |
| Max. input voltage                   | 5 VDC                    |
| High-level input voltage             | >2.0 VDC                 |
| Low-level input voltage              | <0.8 VDC                 |
| High-level output voltage            | >2.4 VDC                 |
| Low-level output voltage             | <0.4 VDC                 |
| Max. bit rate                        | 115'200 bit/s            |
| Data format                          | NRZ (non-return-to-zero) |

Continued on next page.

## COMPACT

| Compact/CB<br>Connector<br>Pin | Signal   | Description         |
|--------------------------------|----------|---------------------|
| X10   1                        | EPOS_RxD | EPOS RS232 receive  |
| X10   2                        | GND      | Ground              |
| X10   3                        | EPOS_TxD | EPOS RS232 transmit |
| X10   4                        | GND      | Ground              |
| X10   5                        | Shield   | Cable shield        |

Table 3-61 RS232 – Pin assignment

| RS232 Interface    |                              |
|--------------------|------------------------------|
| Max. input voltage | ±30 VDC                      |
| Output voltage     | typically ±9 V @ 3 kΩ to GND |
| Max. bit rate      | 115'200 bit/s                |
| RS232 transceiver  | EIA RS232 standard           |

### 3.4.11 CAN Interface

#### 3.4.11.1 Connection

The EPOS4 is specially designed being commanded and controlled via a Controller Area Network (CAN), a highly efficient data bus very common in all fields of automation and motion control. It is preferably used as a slave node in the CANopen network.

| Module Header Pin | Compact/CB Connector Pin | Signal   | Description       |
|-------------------|--------------------------|----------|-------------------|
| B35               | X11   1<br>X12   1       | CAN high | CAN high bus line |
| B36               | X11   2<br>X12   2       | CAN low  | CAN low bus line  |
| B37               | X11   3<br>X12   3       | GND      | Ground            |
| –                 | X11   4<br>X12   4       | Shield   | Cable shield      |

Table 3-62 CAN bus line / CAN 1 / CAN 2 – Pin assignment

| CAN interface            |                                        |                                |
|--------------------------|----------------------------------------|--------------------------------|
| Standard                 | ISO 11898-2:2003                       |                                |
| Max. bit rate            | 1 Mbit/s                               |                                |
| Max. number of CAN nodes | 127/31 (via software/hardware setting) |                                |
| Protocol                 | CiA 301 version 4.2.0                  |                                |
| Identifier setting       | Module                                 | By external wiring or software |
|                          | Compact                                | By DIP switch or software      |

**Note**

- Consider the CAN master's maximal bit rate.
- The standard bit rate setting (factory setting) is 1 Mbit/s. For connector boards and Compact versions, automatic bit rate detection is set.
- Use 120  $\Omega$  termination resistor at both ends of the CAN bus.
- For detailed CAN information → separate document «EPOS4 Communication Guide».

### 3.4.11.2 Configuration

For Compact version's CAN configuration → "DIP Switch Configuration (SW1)" on page 3-39.

#### CAN ID (NODE ADDRESS)

The CAN ID is set with input lines CAN ID1...CAN ID5. The node address (1...31) may be coded using binary code.

| Module Header Pin | Signal   | Description | Binary Code    | Valence |
|-------------------|----------|-------------|----------------|---------|
| B29               | CAN ID 1 | CAN ID 1    | 2 <sup>0</sup> | 1       |
| B30               | CAN ID 2 | CAN ID 2    | 2 <sup>1</sup> | 2       |
| B31               | CAN ID 3 | CAN ID 3    | 2 <sup>2</sup> | 4       |
| B32               | CAN ID 4 | CAN ID 4    | 2 <sup>3</sup> | 8       |
| B33               | CAN ID 5 | CAN ID 5    | 2 <sup>4</sup> | 16      |
| B37               | GND      | Ground      |                |         |

Table 3-63 CAN ID – Pin assignment

| CAN ID             |                  |
|--------------------|------------------|
| Max. input voltage | 3.3 VDC          |
| Logic 1            | connected to GND |
| Logic 0            | not connected    |

The set CAN ID (node address) can be observed by adding the valences of all inputs connected externally to GND. Use the following table as a (non-concluding) guide:

| CAN ID |   |   |   |   | Node Address |
|--------|---|---|---|---|--------------|
| 1      | 2 | 3 | 4 | 5 |              |
| 0*     | 0 | 0 | 0 | 0 | –            |
| 1**    | 0 | 0 | 0 | 0 | 1            |
| 0      | 1 | 0 | 0 | 0 | 2            |
| 0      | 0 | 1 | 0 | 0 | 4            |
| 1      | 0 | 1 | 0 | 0 | 5            |
| 0      | 0 | 0 | 1 | 0 | 8            |
| 0      | 0 | 0 | 0 | 1 | 16           |
| 1      | 1 | 1 | 1 | 1 | 31           |

0\* = CAN ID input line not connected      1\*\* = CAN ID input line externally connected to GND

Table 3-64 CAN ID – Examples



#### Setting the CAN ID by «EPOS Studio»

- The CAN ID may be set by software (changing object "Node ID", range 1...127).
- The CAN ID set by the software is valid if the Node Address is set to "0" (all CAN ID input lines not connected).

**CAN AUTOMATIC BIT RATE DETECTION**

With this function, the CANopen interface can be put in a “listen only” mode. For further details → separate document EPOS4 Firmware Specification. Automatic bit rate detection is activated when the input line is externally connected to GND.

| Bit rate detection   |                    |
|----------------------|--------------------|
| Auto Bit Rate<br>GND | Pin B34<br>Pin B38 |
| Max. input voltage   | 3.3 VDC            |
| Logic 1              | connected to GND   |
| Logic 0              | not connected      |

**3.4.12 Serial Peripheral Interface (SPI)**

The SPI is a high-speed synchronous serial input/output port allowing the use of optional maxon extension modules.

**Note**

*Do not connect any other signals to the SPI apart from those for the maxon extension modules!*

| Module Header Pin | Signal   | Description                                            |
|-------------------|----------|--------------------------------------------------------|
| B38               | GND      | Ground                                                 |
| B41               | SPI_CLK  | Serial Peripheral Interface clock                      |
| B42               | SPI_IRQ  | Serial Peripheral Interface interrupt request          |
| B43               | SPI_SOMI | Serial Peripheral Interface Slave output, Master input |
| B44               | SPI_SIMO | Serial Peripheral Interface Slave input, Master output |
| B45               | SPI_CS2  | Serial Peripheral Interface chip select 2              |
| B46               | SPI_CS1  | Serial Peripheral Interface chip select 1              |

Table 3-65 SPI – Pin assignment

### 3.4.13 USB (X13)



#### Hot plugging the USB interface may cause hardware damage

If the USB interface is being hot-plugged (connecting while the power supply is on), the possibly high potential differences of the two power supplies of controller and PC/Notebook can lead to damaged hardware.

- Avoid potential differences between the power supply of controller and PC/Notebook or, if possible, balance them.
- Insert the USB connector first, then switch on the power supply of the controller.




Figure 3-47 USB connector X13

| Compact/CB Connector Pin | PC's USB Terminal | Signal           | Description                         |
|--------------------------|-------------------|------------------|-------------------------------------|
| X13   1                  | 1                 | V <sub>BUS</sub> | USB bus supply voltage input +5 VDC |
| X13   2                  | 2                 | USB_D-           | USB Data- (twisted pair with Data+) |
| X13   3                  | 3                 | USB_D+           | USB Data+ (twisted pair with Data-) |
| X13   4                  | –                 | ID               | not connected                       |
| X13   5                  | 4                 | GND              | USB ground                          |

Table 3-66 USB connector X13 – Pin assignment

| USB Type A - micro B Cable (403968) |                                              |
|-------------------------------------|----------------------------------------------|
|                                     |                                              |
| Cross-section                       | According to USB 2.0 / USB 3.0 specification |
| Length                              | 1.5 m                                        |
| Head A                              | USB Type “micro B”, male                     |
| Head B                              | USB Type “A”, male                           |

Table 3-67 USB Type A - micro B Cable

| USB                        |                                |
|----------------------------|--------------------------------|
| USB Standard               | USB 2.0 / USB 3.0 (full speed) |
| Max. bus supply voltage    | +5.25 VDC                      |
| Max. DC data input voltage | –0.5...+3.8 VDC                |

### 3.5 Status Indicators

The EPOS4 features LED indicators to display the device condition. For detailed information → separate document «EPOS4 Firmware Specification.




Figure 3-48 Status LED

The LEDs display the actual status and possible errors of the EPOS4:

- Green LED shows the status
- Red LED indicates errors

| LED                                                                       |     | Status / Error                                                                                                                                                                       |
|---------------------------------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Green                                                                     | Red |                                                                                                                                                                                      |
| Slow                                                                      | OFF | Power stage is disabled. The EPOS4 is in status... <ul style="list-style-type: none"> <li>• “Switch ON Disabled”</li> <li>• “Ready to Switch ON”</li> <li>• “Switched ON”</li> </ul> |
| ON                                                                        | OFF | Power stage is enabled. The EPOS4 is in status... <ul style="list-style-type: none"> <li>• “Operation Enable”</li> <li>• “Quick Stop Active”</li> </ul>                              |
| OFF                                                                       | ON  | FAULT state. The EPOS4 is in status... <ul style="list-style-type: none"> <li>• “Fault”</li> </ul>                                                                                   |
| ON                                                                        | ON  | Power stage is enabled. The EPOS4 is in temporary status... <ul style="list-style-type: none"> <li>• “Fault Reaction Active”</li> </ul>                                              |
| Flash                                                                     | ON  | No valid firmware or firmware download in progress                                                                                                                                   |
| Flash = Flashing (≈0.9 s OFF/≈0.1 s ON)      Slow = Slow blinking (≈1 Hz) |     |                                                                                                                                                                                      |

Table 3-68 Status LED

## 4 Motherboard Design Guide

The «Motherboard Design Guide» provides helpful information on integrating the Module on a printed circuit board. It contains recommendations for the motherboard layout and specifies external components that may be required, pin assignments, and connection examples.



### CAUTION

#### ***Dangerous Action***

#### ***Errors in implementing the design can result in serious Injury!***

- *Only proceed if you are skilled in electronics design!*
- *Designing a printed circuit board requires special skills and knowledge and may only be performed by experienced electronic developers!*
- *This quick guide is only intended as an aid, does not make any claim to completeness, and will not automatically result in a functional component!*



### **Get help**

*If you are not trained in the design and development of printed circuit boards, you will need additional support for this point.*

*maxon motor will be happy to provide you with a quote for designing and manufacturing a motherboard for your specific application.*

## 4.1 Requirements for Components of Third-party Suppliers



### Best practice

For references and recommended components consult →Table 4-69.

#### 4.1.1 Socket Headers

The Module's implementation with pin headers permits mounting in two different ways. It can either be plugged onto a socket header or be directly soldered to a printed circuit board.

#### 4.1.2 Supply Voltage

To protect the Module, we recommend using an external circuit breaker, a TVS diode, and a capacitor in the voltage supply cable. In this regard, please note the following recommendations:

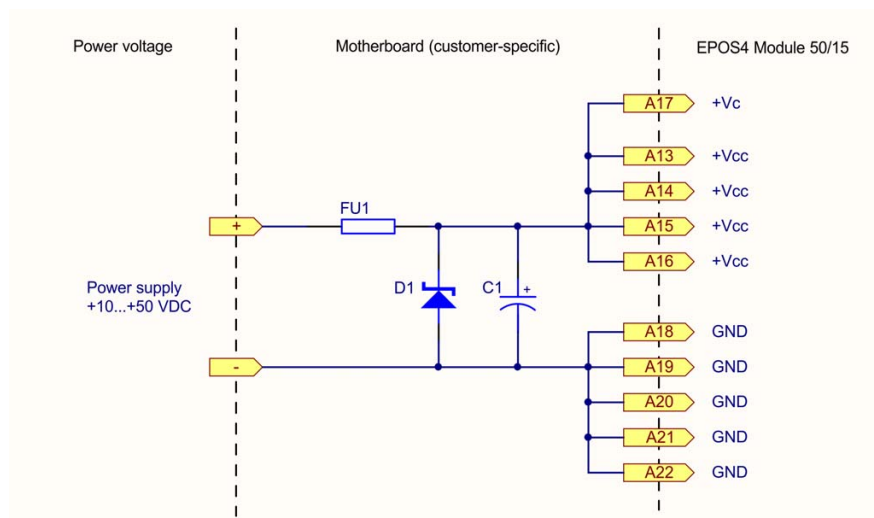


Figure 4-49 Wiring of power supply

#### INPUT FUSE (FU1)

An input fuse (FU1) is necessary in order to provide reverse polarity protection. Together with an unipolar TVS diode (D1), this prevents current from flowing in the wrong direction.

#### TVS DIODE (D1)

To protect against overvoltage resulting from voltage transients or brake energy feedback, we recommend connecting a TVS (transient voltage suppressor) diode (D1) to the voltage supply line.

#### CAPACITOR (C1)

The function of the Module does not necessarily require the use of an external capacitor. Nevertheless, to further reduce voltage ripple and feedback currents, an electrolytic capacitor (C1) can be connected to the voltage supply line. Use of an electrolytic capacitor is also recommended to avoid oscillations caused by supply cable inductance or the Module's built-in capacitors that could lead to a voltage overshoot at power plug-in.

### 4.1.3 Logic Supply Voltage

The Module features a logic supply voltage input. Its voltage range is 10...50 V and must be either sourced separately or by the power supply voltage.

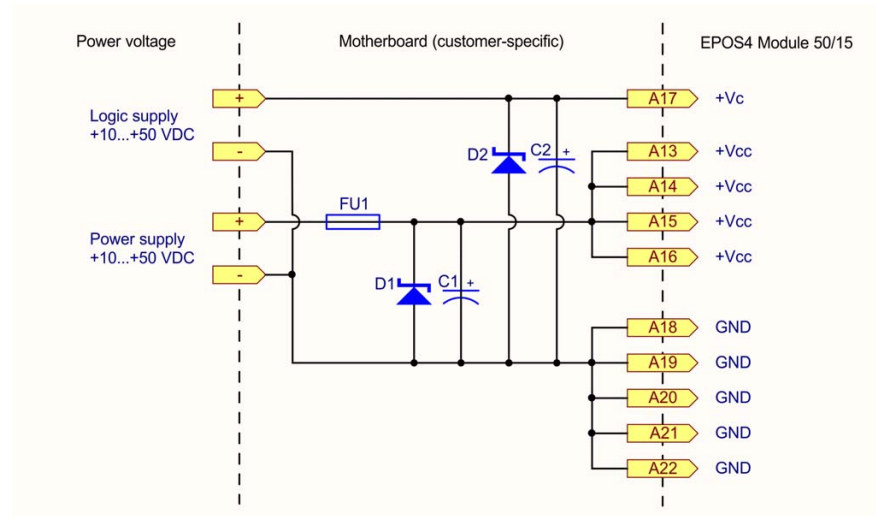


Figure 4-50 Wiring of logic supply

#### INPUT FUSE (FU1)

An input fuse (FU1) is necessary in order to provide reverse polarity protection. Together with an unipolar TVS diode (D2), this prevents current from flowing in the wrong direction.

#### TVS DIODE (D2)

If the logic supply voltage is sourced separately, a transient voltage suppressor diode (D2) at the logic supply voltage input can be connected to protect the module against overvoltage.

#### CAPACITOR (C2)

Use an electrolytic capacitor (C2) if the logic supply is sourced separately. This will avoid oscillations caused by supply cable inductance or the Module's built-in capacitors that could lead to a voltage overshoot at power plug-in.

## 4.1.4 Motor Cables and Motor Chokes

The Module is not equipped with internal motor chokes.

The majority of motors and applications do not require additional chokes. However, in case of high supply voltage with very low terminal inductance, the ripple of the motor current can reach an unacceptably high value. This causes the motor to heat up unnecessarily and causes instable control behavior. The minimum terminal inductance required per phase can be calculated using the following formula:

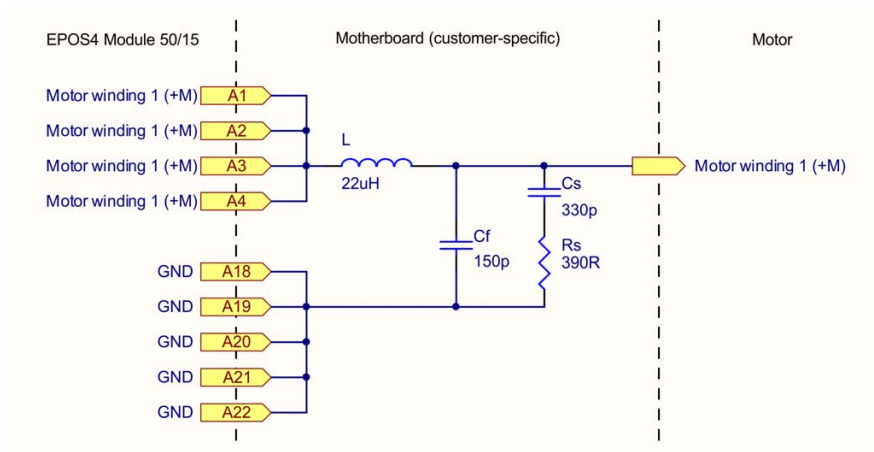
$$L_{Phase} \geq \frac{1}{2} \cdot \left( \frac{V_{CC}}{6 \cdot f_{PWM} \cdot I_N} - (0.3 \cdot L_{Motor}) \right)$$

|                |                                                                  |
|----------------|------------------------------------------------------------------|
| $L_{Phase}[H]$ | Additional external inductance per phase                         |
| $V_{CC}[V]$    | Operating voltage +V <sub>CC</sub>                               |
| $f_{PWM}[Hz]$  | Switching frequency of the power stage = 50'000 Hz               |
| $I_N[A]$       | Nominal current of the motor (→line 6 in the maxon catalog)      |
| $L_{Motor}[H]$ | Terminal inductance of the motor (→line 11 in the maxon catalog) |

If the result of the calculation is negative, no additional chokes are necessary. Nevertheless, the use of chokes in combination with additional filter components can be useful to reduce the emission of electromagnetic interference.

An additional choke must feature electromagnetic shielding, an adequate saturation current, minimal losses, and a nominal current greater than the continuous current of the motor. The below wiring example refers to an additional inductance of 2.2 µH or 22 µH. If a different additional inductance is required, also the filter components must be adapted accordingly. Should you need further help with the filter design, contact maxon Support at →<http://support.maxonmotor.com>.

### Example 1



### Example 2

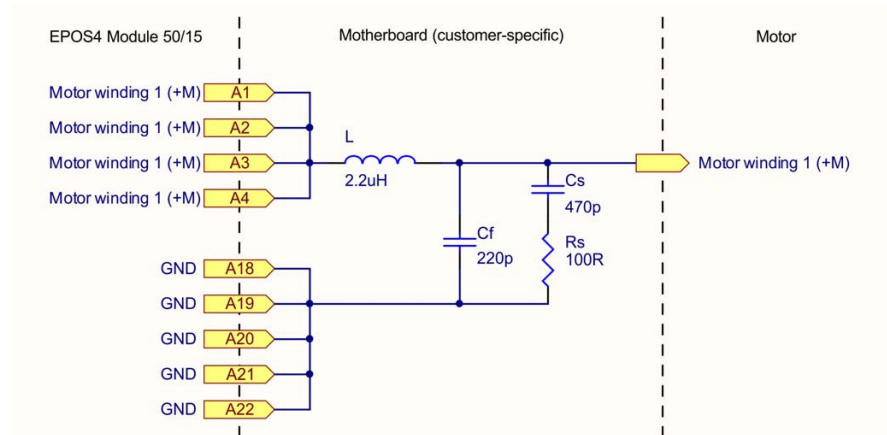


Figure 4-51 Wiring of motor winding 1 (analogously valid also for motor windings 2 & 3)

### 4.1.5 Recommended Components and Manufacturers

| Recommended components |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Socket header          | <p>Straight socket header, pluggable with 0.64 x 0.64 mm pin headers, 2.54 mm pitch, contact length 6 mm, current rating per pin = <math>I_{cont} / 4</math>, contact material: gold</p> <p><b>16 poles, 2 rows:</b></p> <ul style="list-style-type: none"> <li>Samtec (SSM-116-x-DV) SMT, 5.2 A per pin, 7.37 mm</li> <li>E-Tec (BS2-032-H750-55) SMT, 3 A per pin, 7.50 mm</li> <li>FCI (91618-316LF) SMT, 3 A per pin, 7.20 mm</li> <li>Samtec (SSW-116-0x-x-D) THT, 5.7 A per pin, 8.51 mm</li> <li>E-Tec (BL2-032-S842-55) THT, 3 A per pin, 8.50 mm</li> <li>FCI (87606-316LF) THT, 3 A per pin, 8.50 mm</li> </ul> <p><b>23 poles, 2 rows:</b></p> <ul style="list-style-type: none"> <li>Samtec (SSM-123-x-DV) SMT, 5.2 A per pin, 7.37 mm</li> <li>E-Tec (BS2-046-H750-55) SMT, 3 A per pin, 7.50 mm</li> <li>FCI (91618-323LF) SMT, 3 A per pin, 7.20 mm</li> <li>Samtec (SSW-123-0x-x-D) THT, 5.7 A per pin, 8.51 mm</li> <li>E-Tec (BL2-046-S842-55) THT, 3 A per pin, 8.50 mm</li> <li>FCI (87606-323LF) THT, 3 A per pin, 8.50 mm</li> </ul> |
|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Fuse (FU1)             | <ul style="list-style-type: none"> <li>Littelfuse 456 series, SMD NANO2 Fuse 20 A, 18 A<sup>2</sup>sec (0456 020)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| TVS Diode (D1; D2)     | <ul style="list-style-type: none"> <li>Vishay (SMBJ54A) <math>U_R = 54 \text{ V}</math>, <math>U_{BR} = 60.0 \dots 66.3 \text{ V @ } 1 \text{ mA}</math>, <math>U_C = 87.1 \text{ V @ } 6.9 \text{ A}</math></li> <li>Fairchild (SMBJ54A) <math>U_R = 54 \text{ V}</math>, <math>U_{BR} = 60.0 \dots 66.6 \text{ V @ } 1 \text{ mA}</math>, <math>U_C = 87.1 \text{ V @ } 6.9 \text{ A}</math></li> <li>Littelfuse (SMBJ54A) <math>U_R = 54 \text{ V}</math>, <math>U_{BR} = 60.0 \dots 66.6 \text{ V @ } 1 \text{ mA}</math>, <math>U_C = 87.1 \text{ V @ } 6.9 \text{ A}</math></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Capacitor (C1)         | <p>The ripple current load for C1 depends on the motor's operating point and the power supply output capacity. Under worst case conditions however, the ripple current may reach <math>I_{cont} / 2</math>. Use capacitors with rated voltage <math>\geq 63 \text{ V}</math> and adequate ripple current to avoid overheating or life time reduction.</p> <p><b>Example for C1 worst-case dimensioning:</b></p> <p><math>I_{cont} = 12 \text{ A} \rightarrow 3 \times \text{Panasonic (EEU-FR1J391); } 390 \mu\text{F, } 63 \text{ V, } 2000 \text{ mA r.m.s., } \varnothing \times \text{L } 12.5 \times 25 \text{ mm}</math></p>                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Capacitor (C2)         | <p>To avoid voltage overshoot at power plug-in with a separately sourced logic supply, use an electrolytic capacitor covering the following requirements: 33 <math>\mu\text{F}</math> or 47 <math>\mu\text{F}</math>, 63 V, at least 265 mA r.m.s.</p> <ul style="list-style-type: none"> <li>Rubicon (63ZLH47MEFCTA6.3X11) or (63YXJ47M6.3X11)</li> <li>Panasonic (EEU-FR1J470B)</li> <li>Nippon Chemicon (EKYB630ELL330MF11D) or (EKY-630 ELL330MF11D)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Continued on next page.

| Recommended components |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Motor Choke (L)        | <p>Inductance: → “Motor Cables and Motor Chokes” on page 4-78</p> <p>Rated current: <math>I_{rms} \geq I_{cont}</math>; <math>I_{sat} \geq I_{peak}</math></p> <p>Construction: shielded</p> <p><b>2.2 µH:</b></p> <ul style="list-style-type: none"> <li>Bourns (SRP1265A-2R2M) <math>I_{rms}</math> 22 A, <math>I_{sat}</math> 37 A, 12.5 x 13.5 x 6.4 mm</li> <li>Vishay (IHLP5050FDER2R2M01) <math>I_{rms}</math> 22 A, <math>I_{sat}</math> 40 A, 12.9 x 13.2 x 6.5 mm</li> <li>Laird (MGV12072R2M-10) <math>I_{rms}</math> 22 A, <math>I_{sat}</math> 40 A, 12.6 x 13.5 x 6.5 mm</li> </ul> <p><b>22 µH:</b></p> <ul style="list-style-type: none"> <li>Würth (WE-PD-XXL / 7447709220) <math>I_{rms}</math> 5.3 A, <math>I_{sat}</math> 6.5 A, 12.5 x 12.5 x 10 mm</li> </ul> |
|                        | <p><b>Example 1</b></p> <ul style="list-style-type: none"> <li>Motor Choke L 22 µH</li> <li>Filter Capacitor Cf 150 pF, 100 V</li> <li>Snubber Capacitor Cs 330 pF, 100 V</li> <li>Snubber Resistor Rs 390 Ω, 0.125 W</li> </ul> <p><b>Example 2</b></p> <ul style="list-style-type: none"> <li>Motor Choke L 2.2 µH</li> <li>Filter Capacitor Cf 220 pF, 100 V</li> <li>Snubber Capacitor Cs 470 pF, 100 V</li> <li>Snubber Resistor Rs 100 Ω, 0.25 W</li> </ul>                                                                                                                                                                                                                                                                                                                   |

Table 4-69 Motherboard Design Guide – Recommended components

## 4.2 Design Guidelines

The following instructions are intended to serve as an aid when designing an application-specific motherboard and ensures the correct and reliable integration of the Module.

While designing a motherboard, consider the following characteristics:

- Pin assignment (→page 3-20)
- Technical data (→page 2-11) and dimensional drawing (→page 2-15)

### 4.2.1 Ground

All ground connections (GND) should be internally connected to the Module (equal potential). It is customary to equip the motherboard with a ground plane. All ground connections should be connected to the voltage supply ground via wide conductive tracks.

| Pin       | Signal | Description |
|-----------|--------|-------------|
| A18...A22 | GND    | Ground      |
| B16       | GND    | Ground      |
| B37...B38 | GND    | Ground      |

Table 4-70 Motherboard Design Guide – Grounding

If an earth potential is in place or required, the ground plane should be connected to the earth potential via one or more capacitors. The use of ceramic capacitors with 100 nF and 100 V is recommended.

### 4.2.2 Layout

Guidelines for the layout of the motherboard:

- Connector pins [A13], [A14], [A15], and [A16] for +V<sub>CC</sub> (nominal power supply voltage) should be connected to the fuse via wide conductive tracks.
- Connector pins [A18], [A19], [A20], [A21], [A22], [B16], [B37], and [B38] for GND (ground) should be connected with the operating voltage ground via wide conductive tracks.
- The width of the conductive tracks and the copper coating thickness of the conductors for supply voltage and motor depend on the current required in your application. A minimum track width of 75 mil and a minimum copper coating thickness of 35 µm are recommended.

## 4.3 THT Footprint

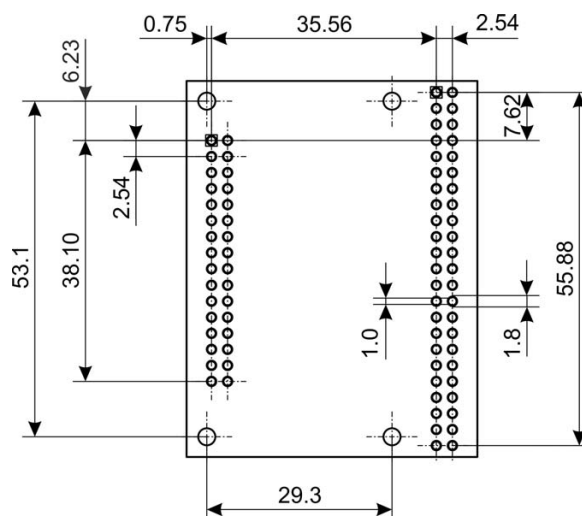


Figure 4-52 THT footprint [mm] – Top View

••page intentionally left blank••

## 5 Wiring

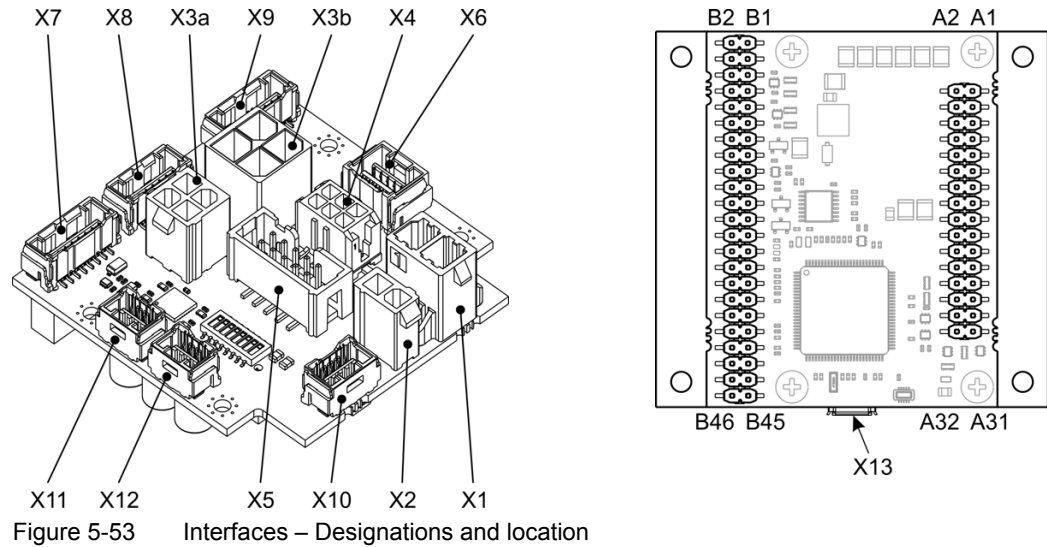


Figure 5-53 Interfaces – Designations and location



### Signs and abbreviations used

The subsequent diagrams feature this signs and abbreviations:

- Items marked with an asterisk (\*) will be available with an upcoming firmware release.
- «EC Motor» stands for brushless EC motor (BLDC).
-  Ground safety earth connection (optional).

### 5.1 Contents

#### DC Motors

|                                                         |      |
|---------------------------------------------------------|------|
| DC Motor without Sensor .....                           | 5-85 |
| DC Motor – Digital Incremental Encoder .....            | 5-86 |
| DC Motor – Digital & Digital Incremental Encoder* ..... | 5-87 |
| DC Motor – Digital & Analog Incremental Encoder* .....  | 5-88 |
| DC Motor – Digital Incremental & SSI Encoder .....      | 5-89 |
| DC Motor – Analog Incremental Encoder* .....            | 5-90 |
| DC Motor – SSI Encoder .....                            | 5-91 |

#### EC (BLDC) Motors

|                                                                        |      |
|------------------------------------------------------------------------|------|
| EC Motor – Hall Sensors .....                                          | 5-92 |
| EC Motor – Hall Sensors & Digital Incremental Encoder .....            | 5-93 |
| EC Motor – Hall Sensors & Analog Incremental Encoder* .....            | 5-94 |
| EC Motor – Hall Sensors & SSI Encoder .....                            | 5-95 |
| EC Motor – Hall Sensors & Digital & Digital Incremental Encoder* ..... | 5-96 |
| EC Motor – Hall Sensors & Digital & Analog Incremental Encoder* .....  | 5-97 |
| EC Motor – Hall Sensors & Digital Incremental & SSI Encoder .....      | 5-98 |

Continued on next page.

|                                                             |       |
|-------------------------------------------------------------|-------|
| EC Motor – Digital Incremental Encoder* . . . . .           | 5-99  |
| EC Motor – Digital & Digital Incremental Encoder* . . . . . | 5-100 |
| EC Motor – Digital & Analog Incremental Encoder* . . . . .  | 5-101 |
| EC Motor – Digital Incremental & SSI Encoder* . . . . .     | 5-102 |
| EC Motor – Analog Incremental Encoder* . . . . .            | 5-103 |
| EC Motor – SSI Encoder* . . . . .                           | 5-104 |

## 5.2 DC Motors (brushed)

### 5.2.1 DC Motor without Sensor

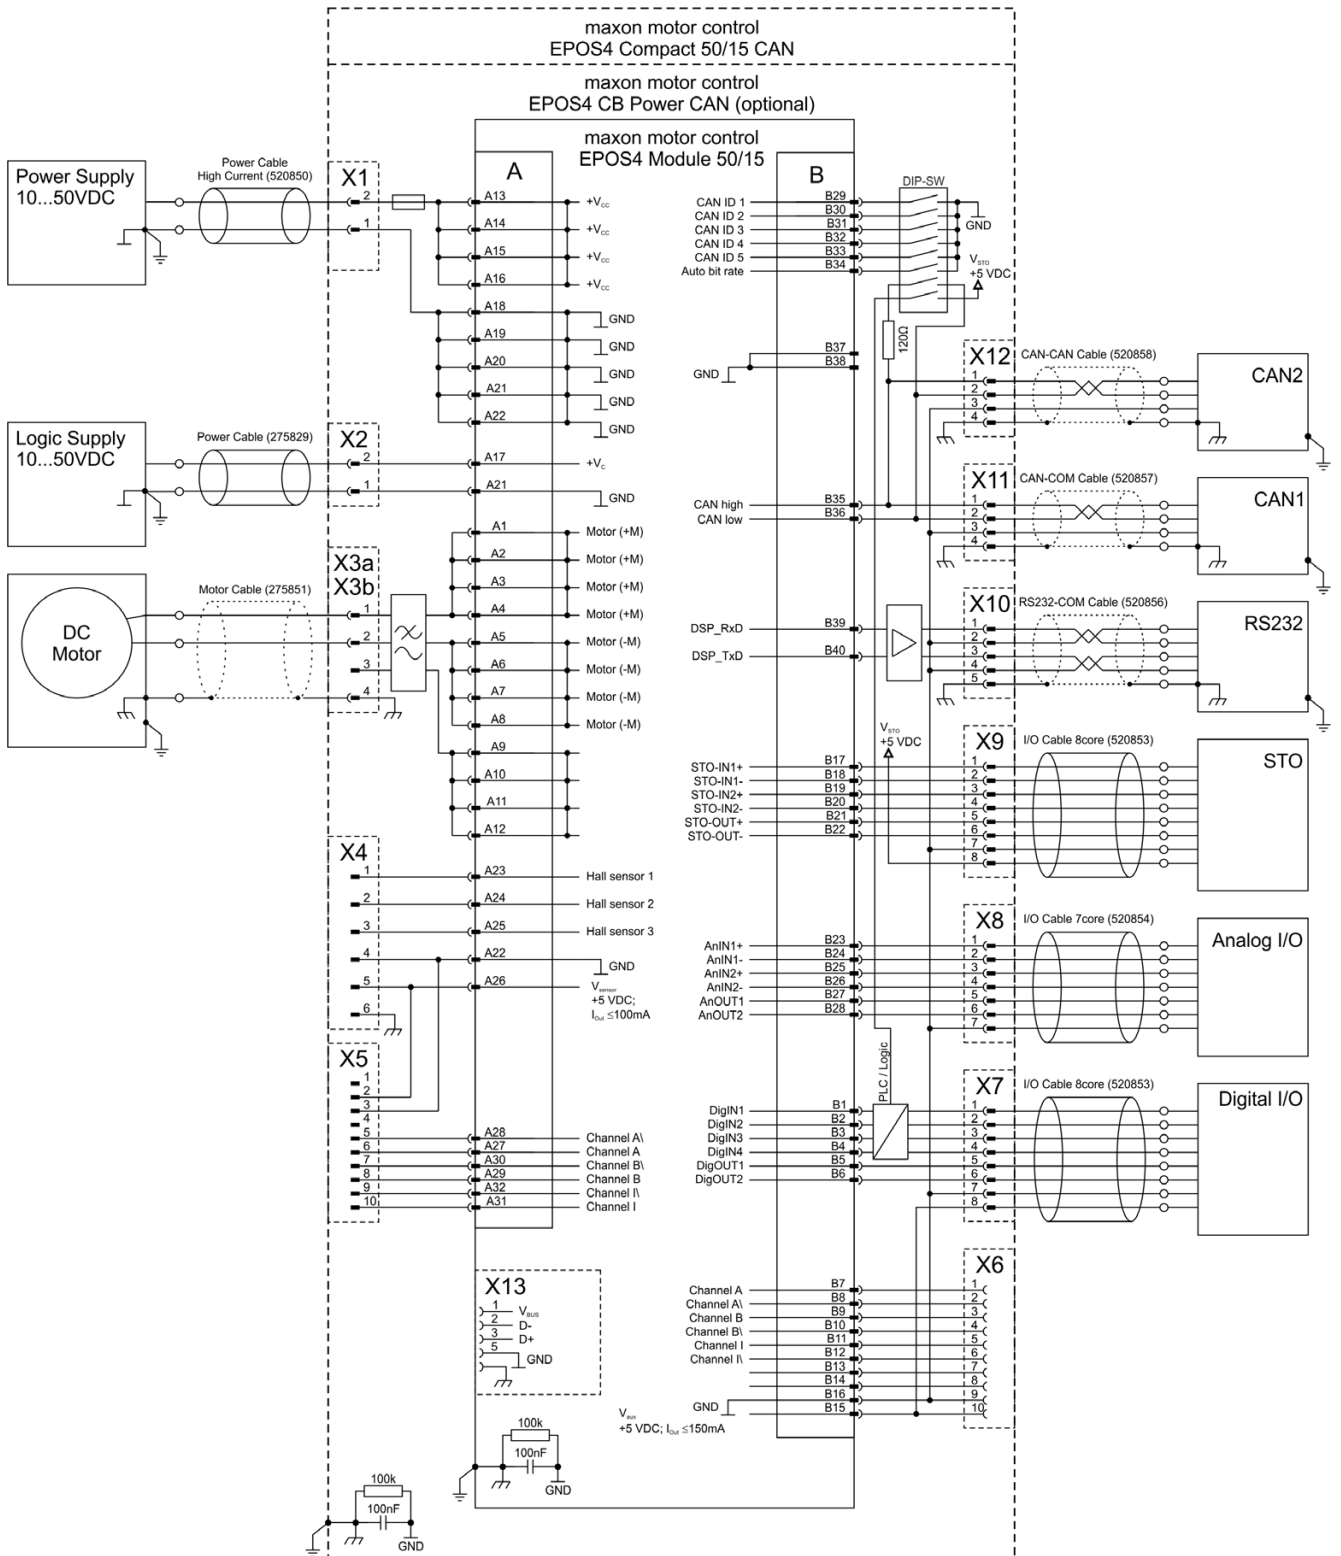


Figure 5-54 DC motor (no sensor)

## 5.2.2 DC Motor – Digital Incremental Encoder

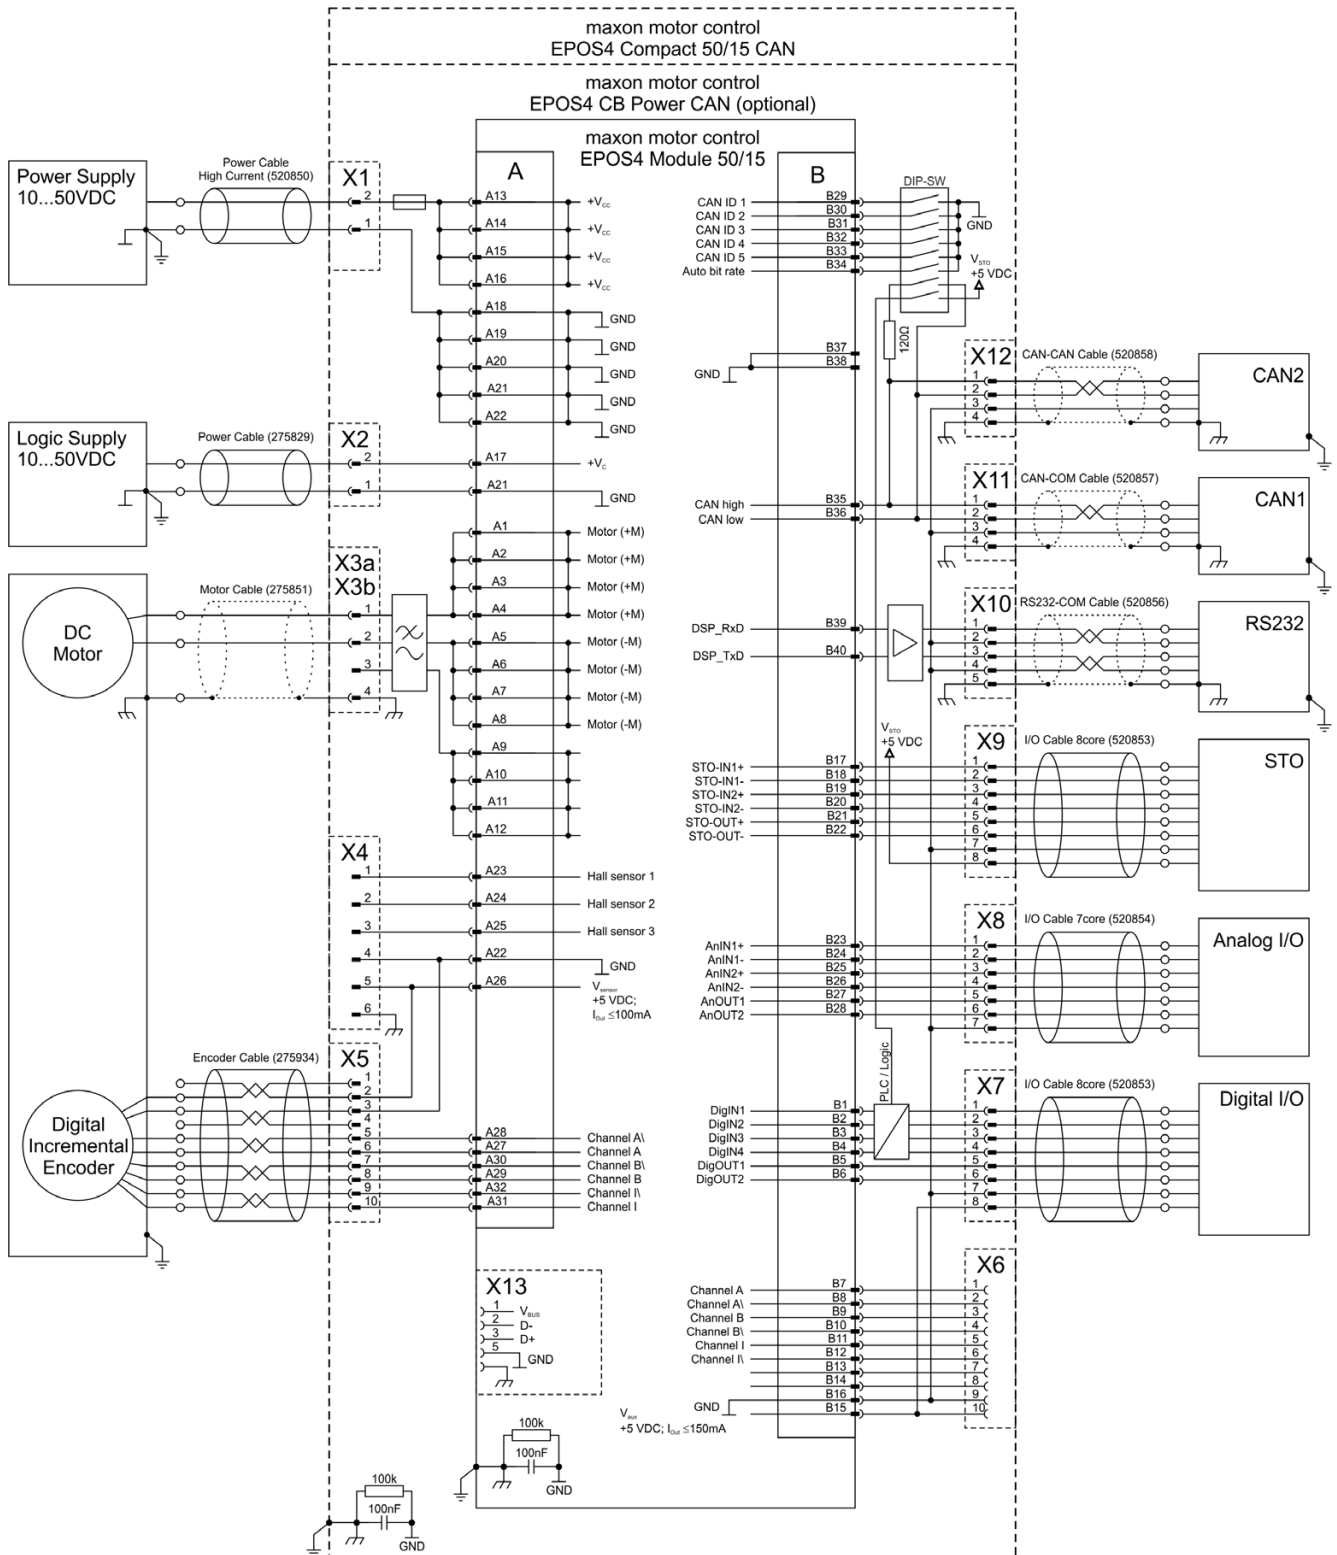


Figure 5-55 DC motor (digital incremental encoder)

### 5.2.3 DC Motor – Digital & Digital Incremental Encoder\*

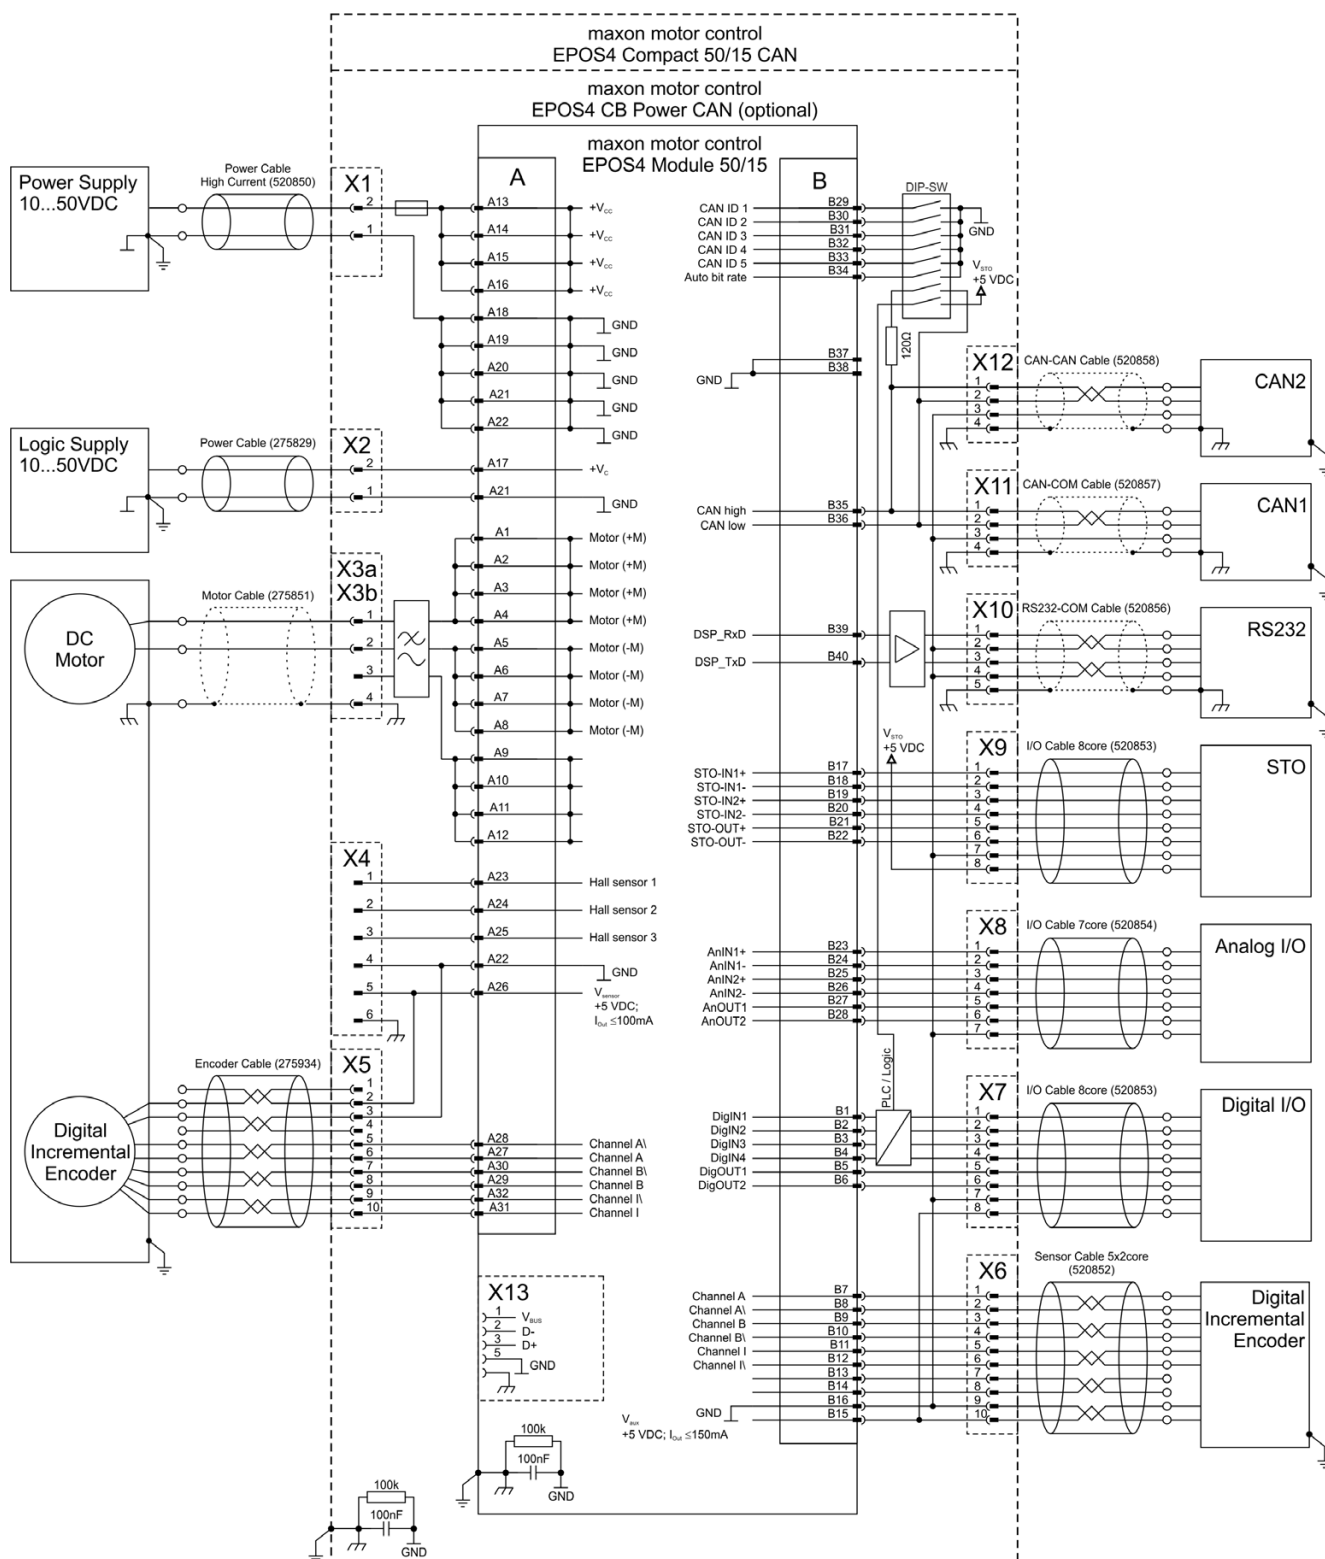


Figure 5-56 DC motor (digital & digital incremental encoder)

## 5.2.4 DC Motor – Digital & Analog Incremental Encoder\*

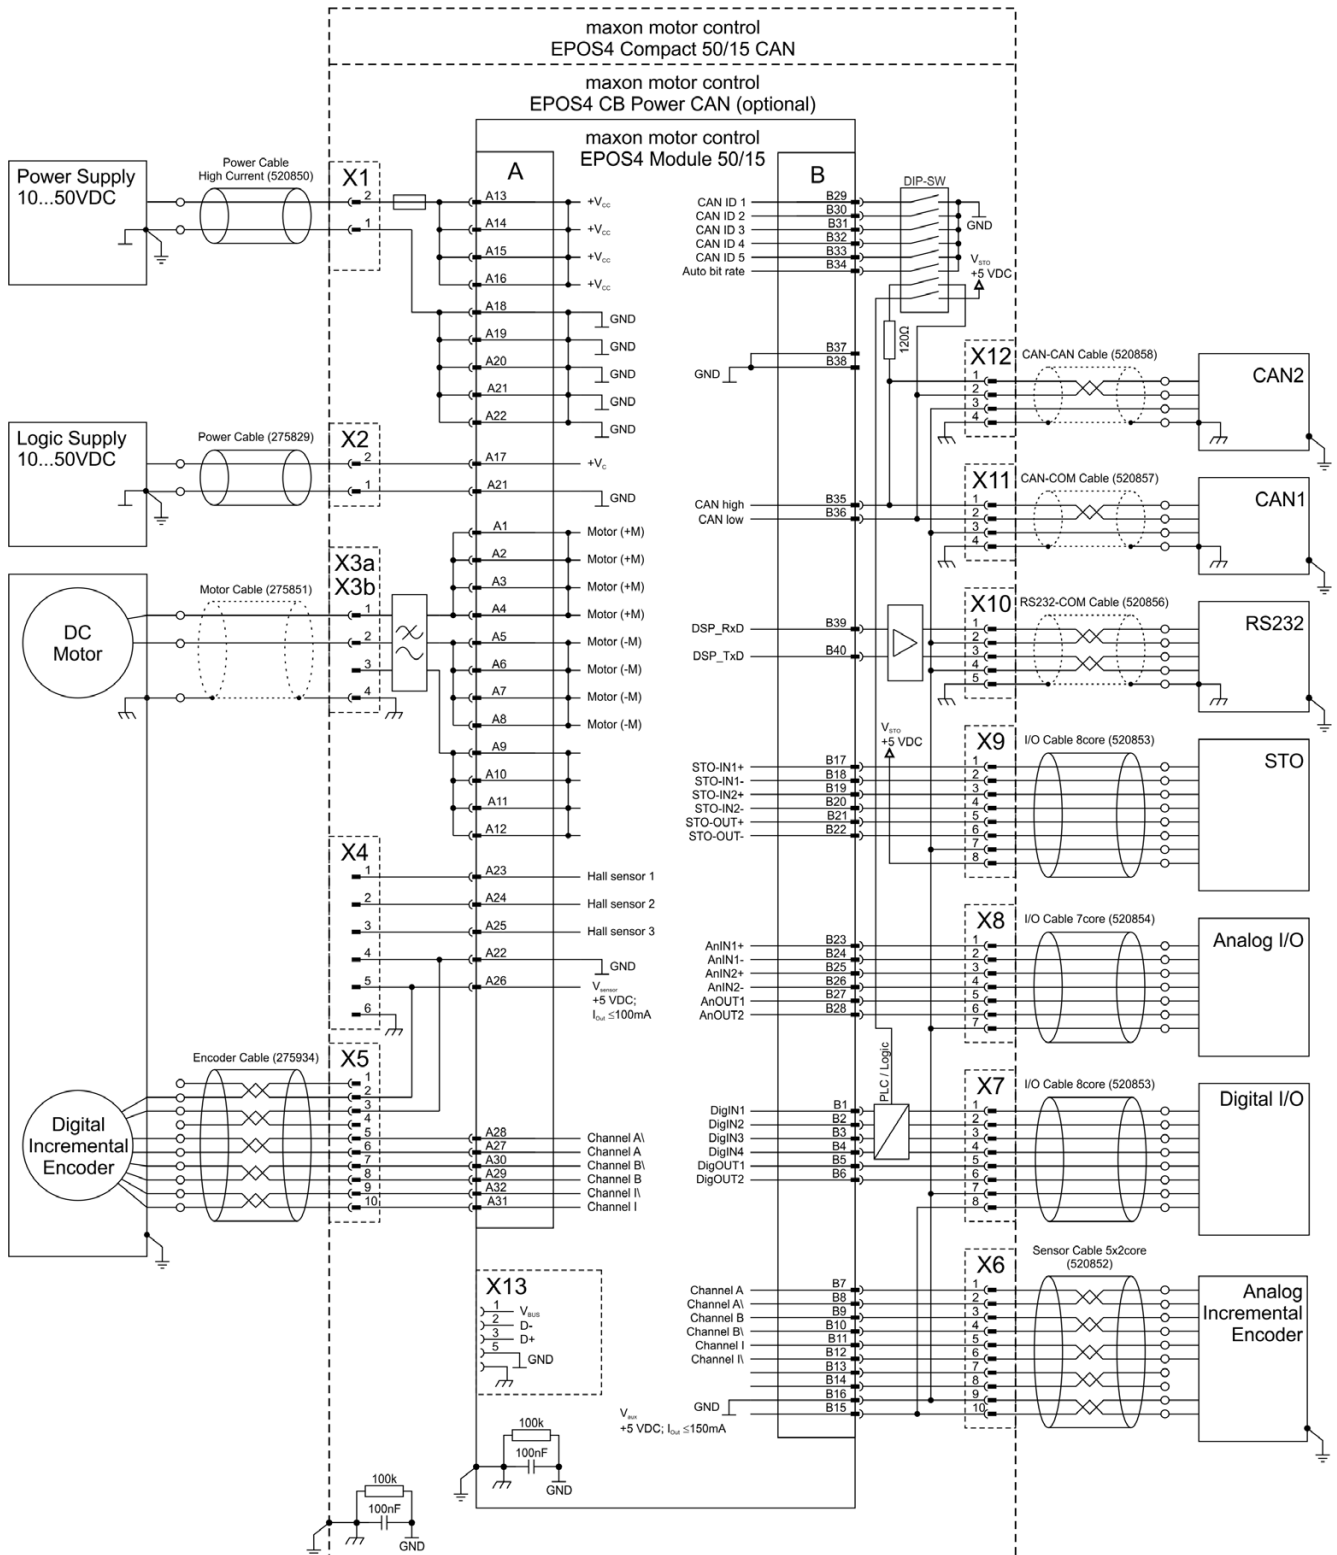


Figure 5-57 DC motor (digital & analog incremental encoder)

## 5.2.5 DC Motor – Digital Incremental &amp; SSI Encoder

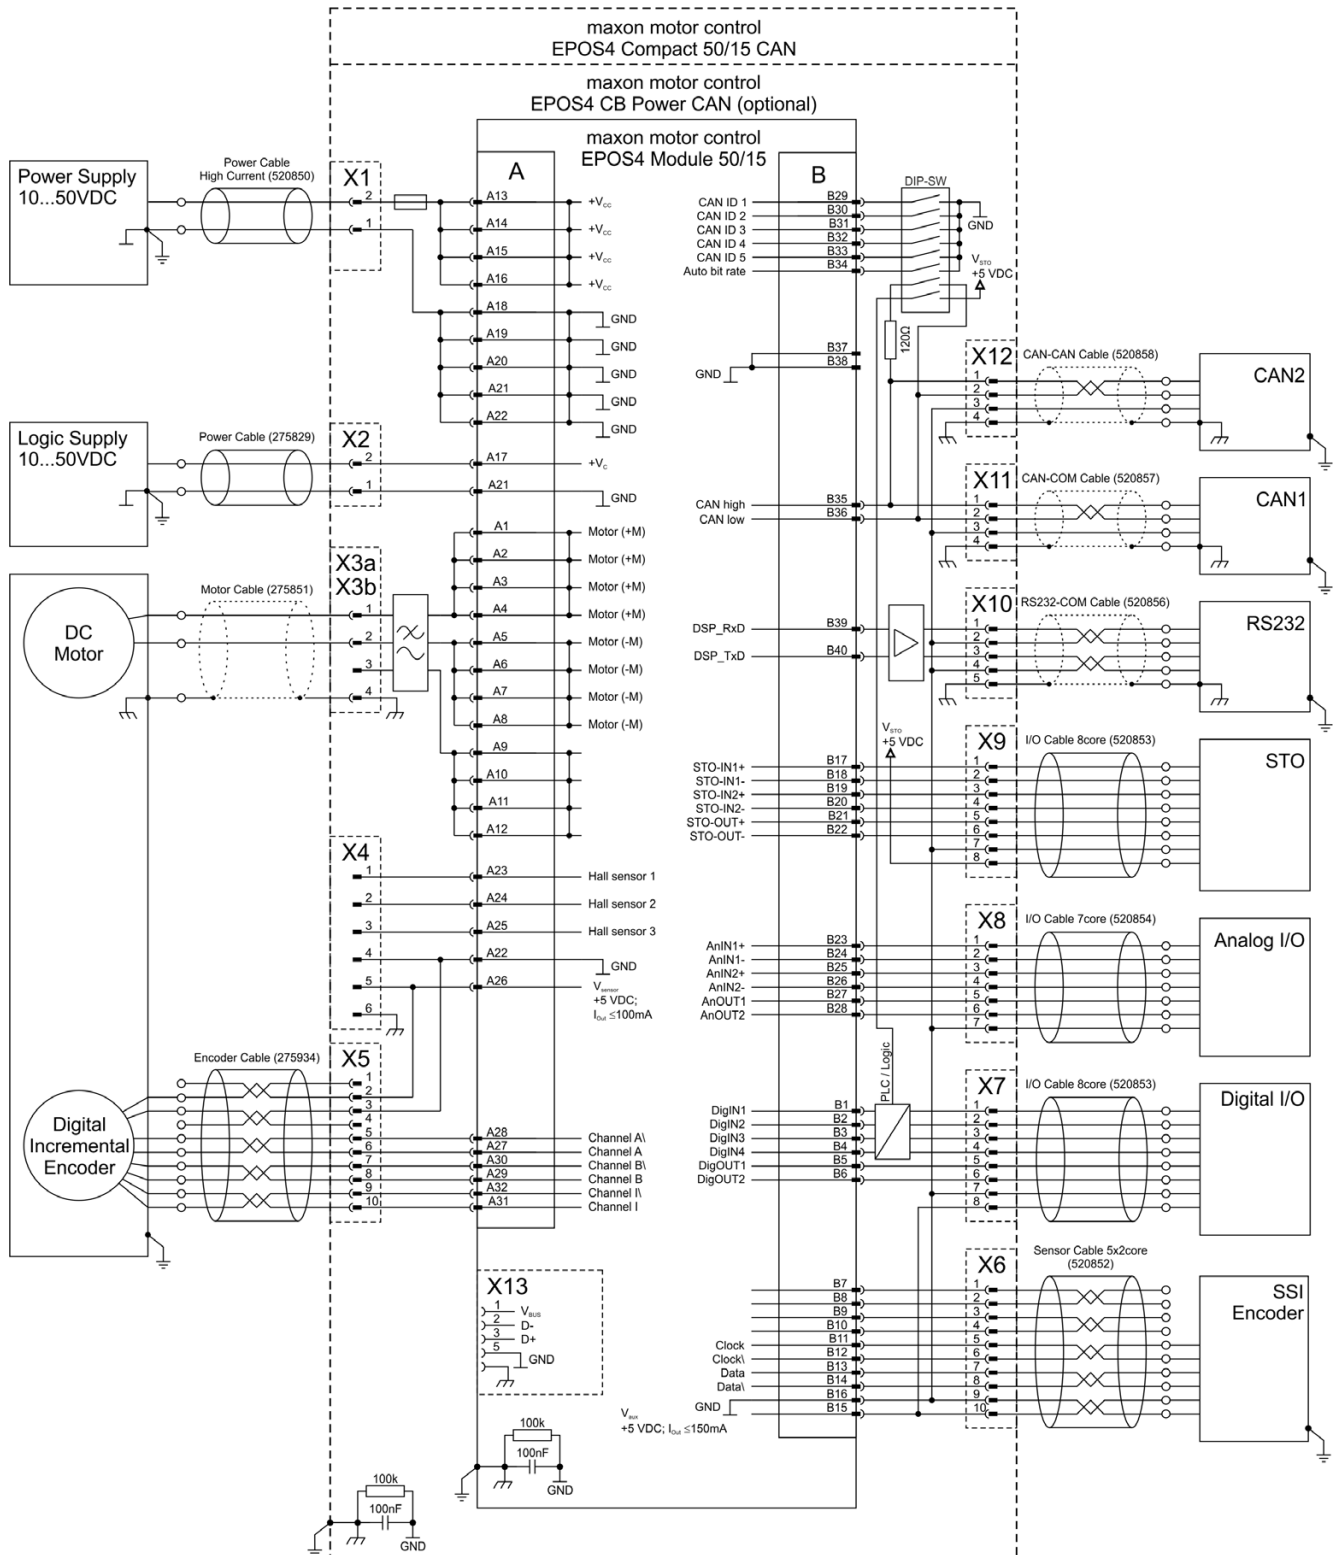


Figure 5-58 DC motor (digital incremental &amp; SSI encoder)

## 5.2.6 DC Motor – Analog Incremental Encoder\*

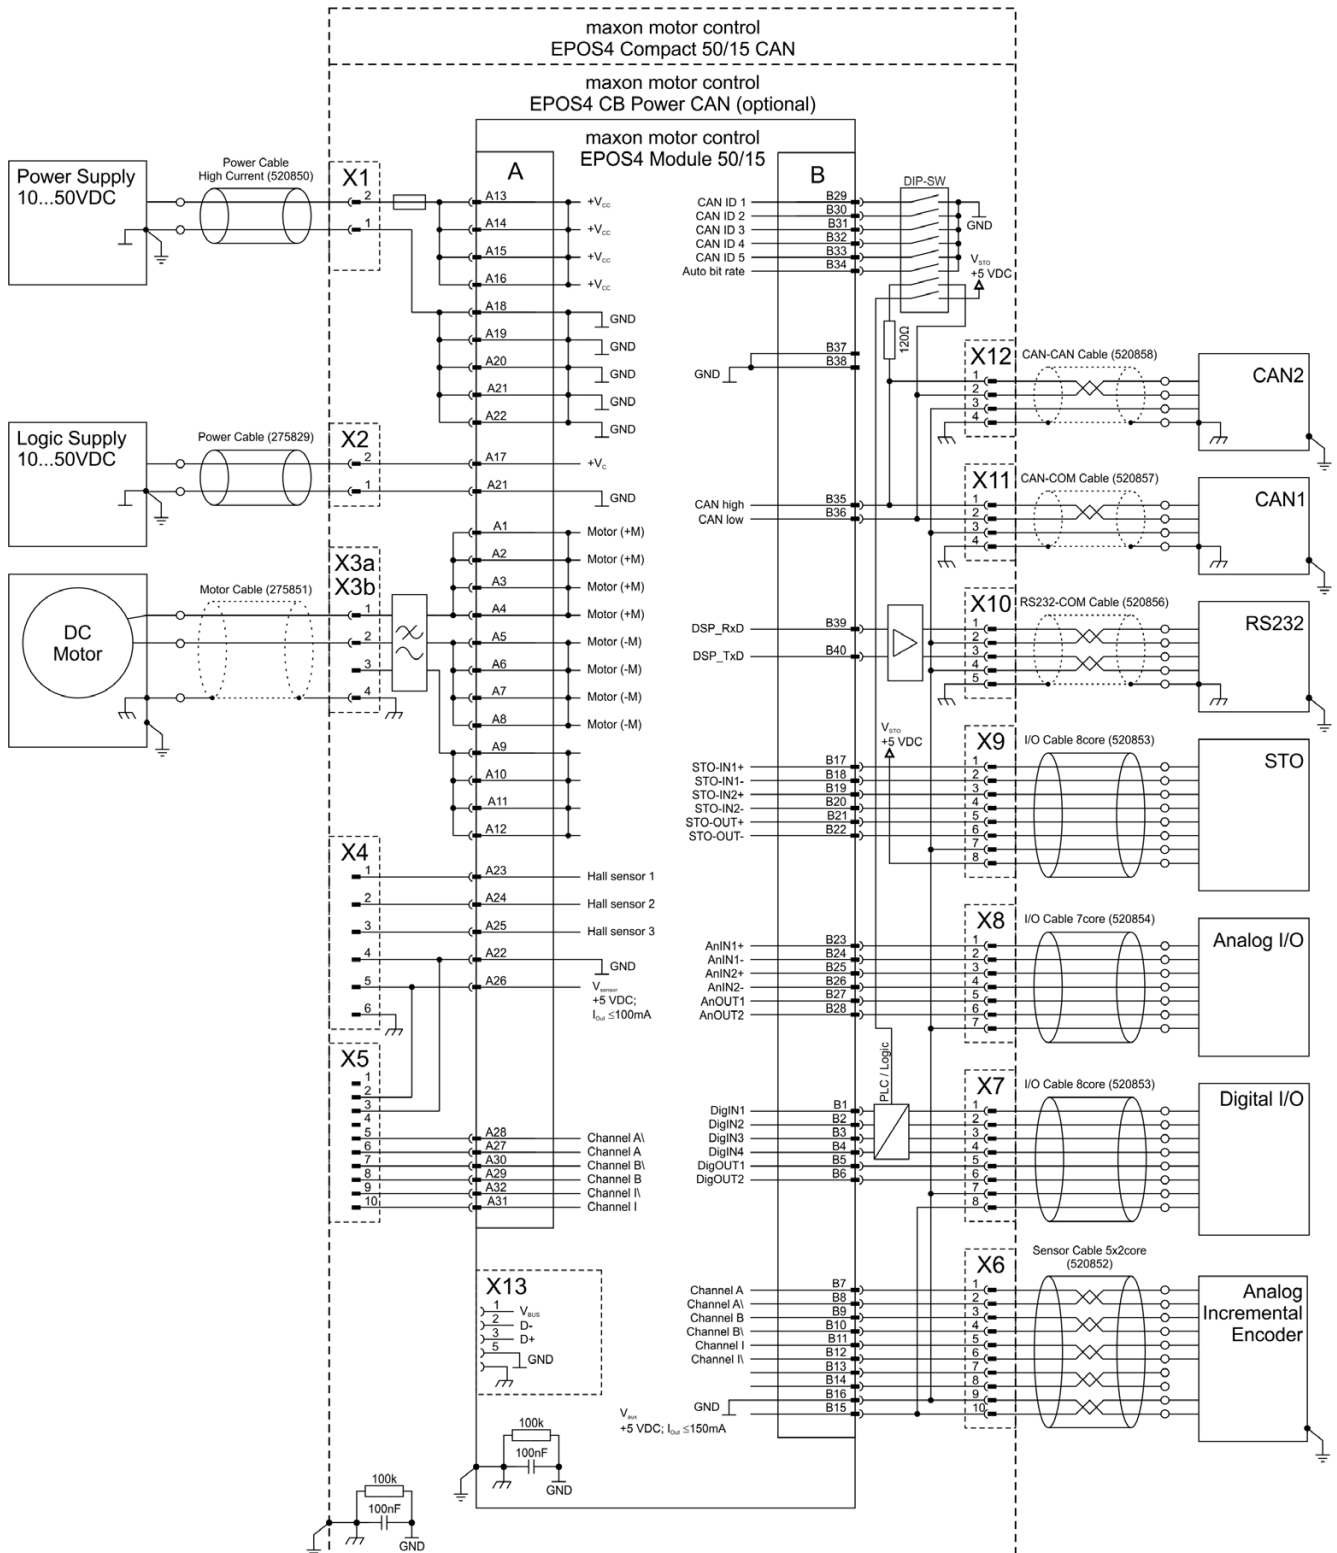


Figure 5-59 DC motor (analog incremental encoder)

## 5.2.7 DC Motor – SSI Encoder

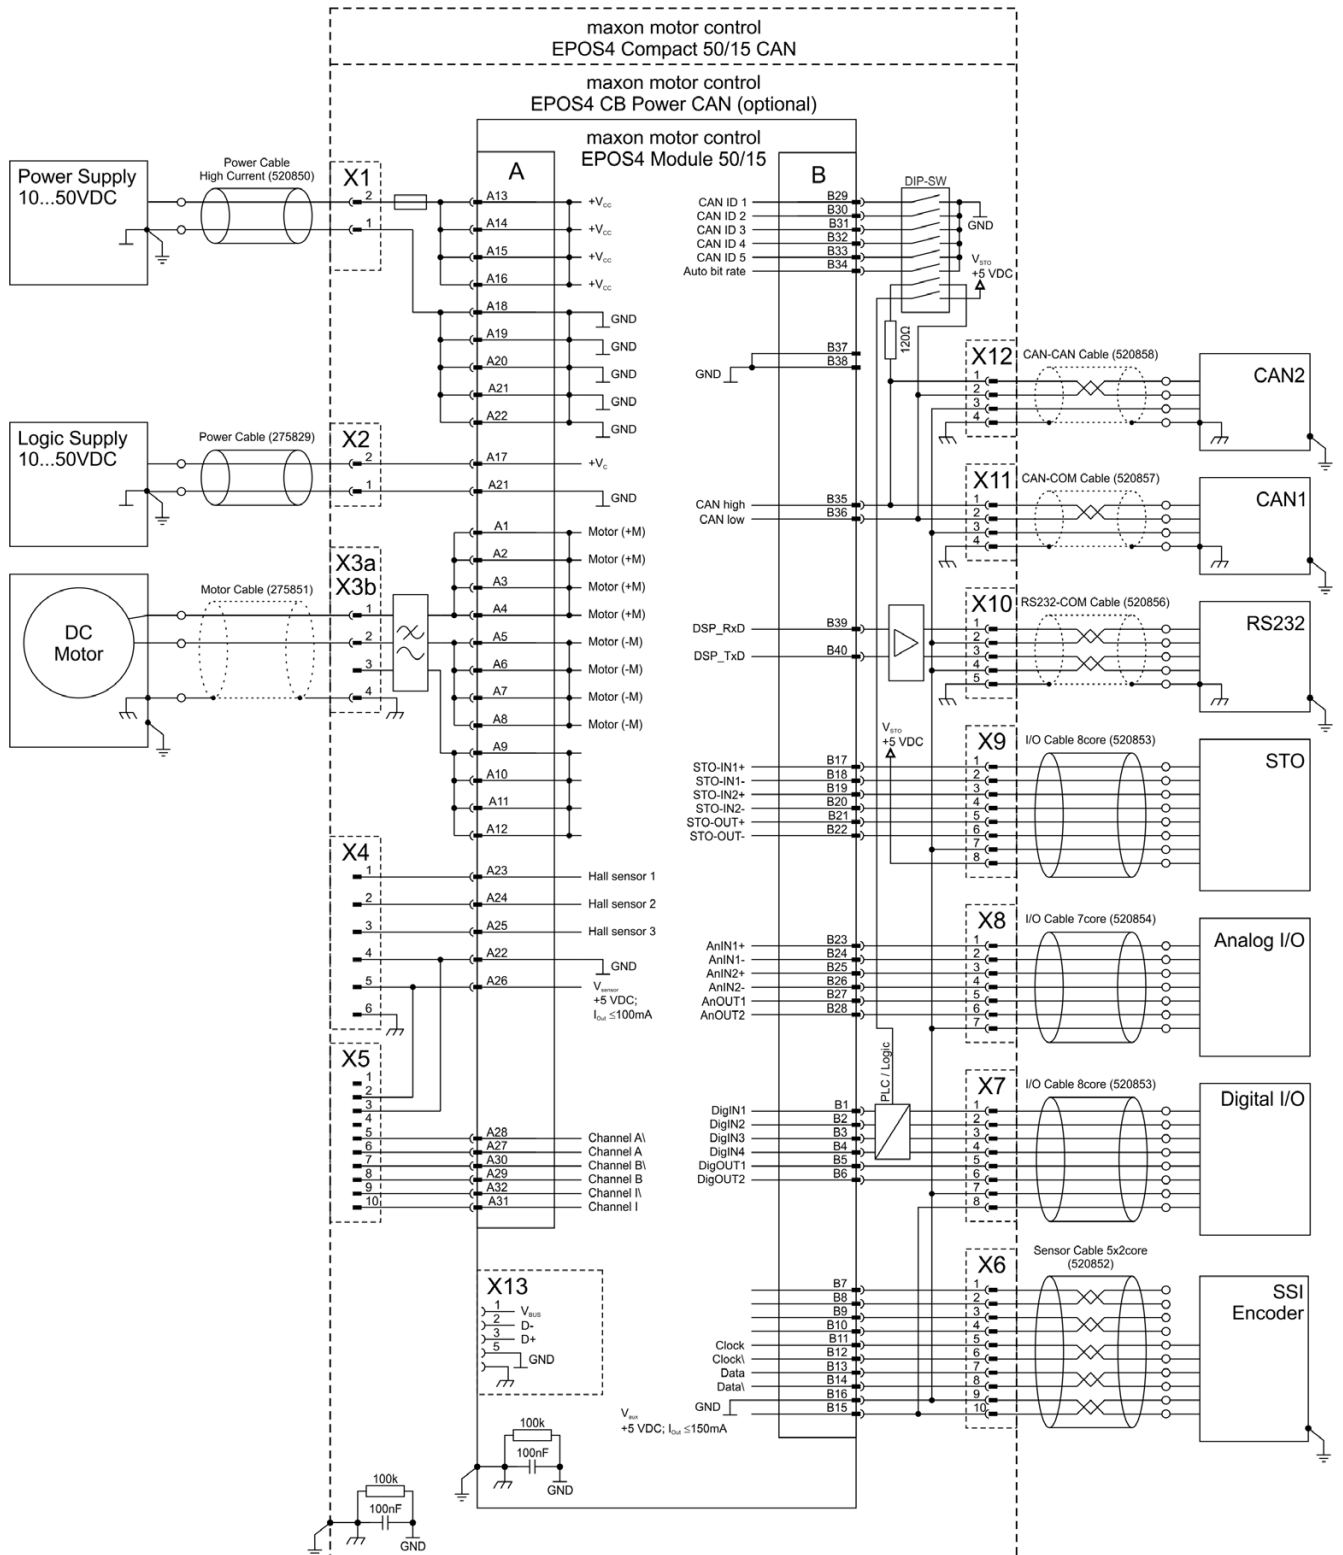


Figure 5-60 DC motor (SSI encoder)

## 5.3 EC Motors (BLDC, brushless)

### 5.3.1 EC Motor – Hall Sensors

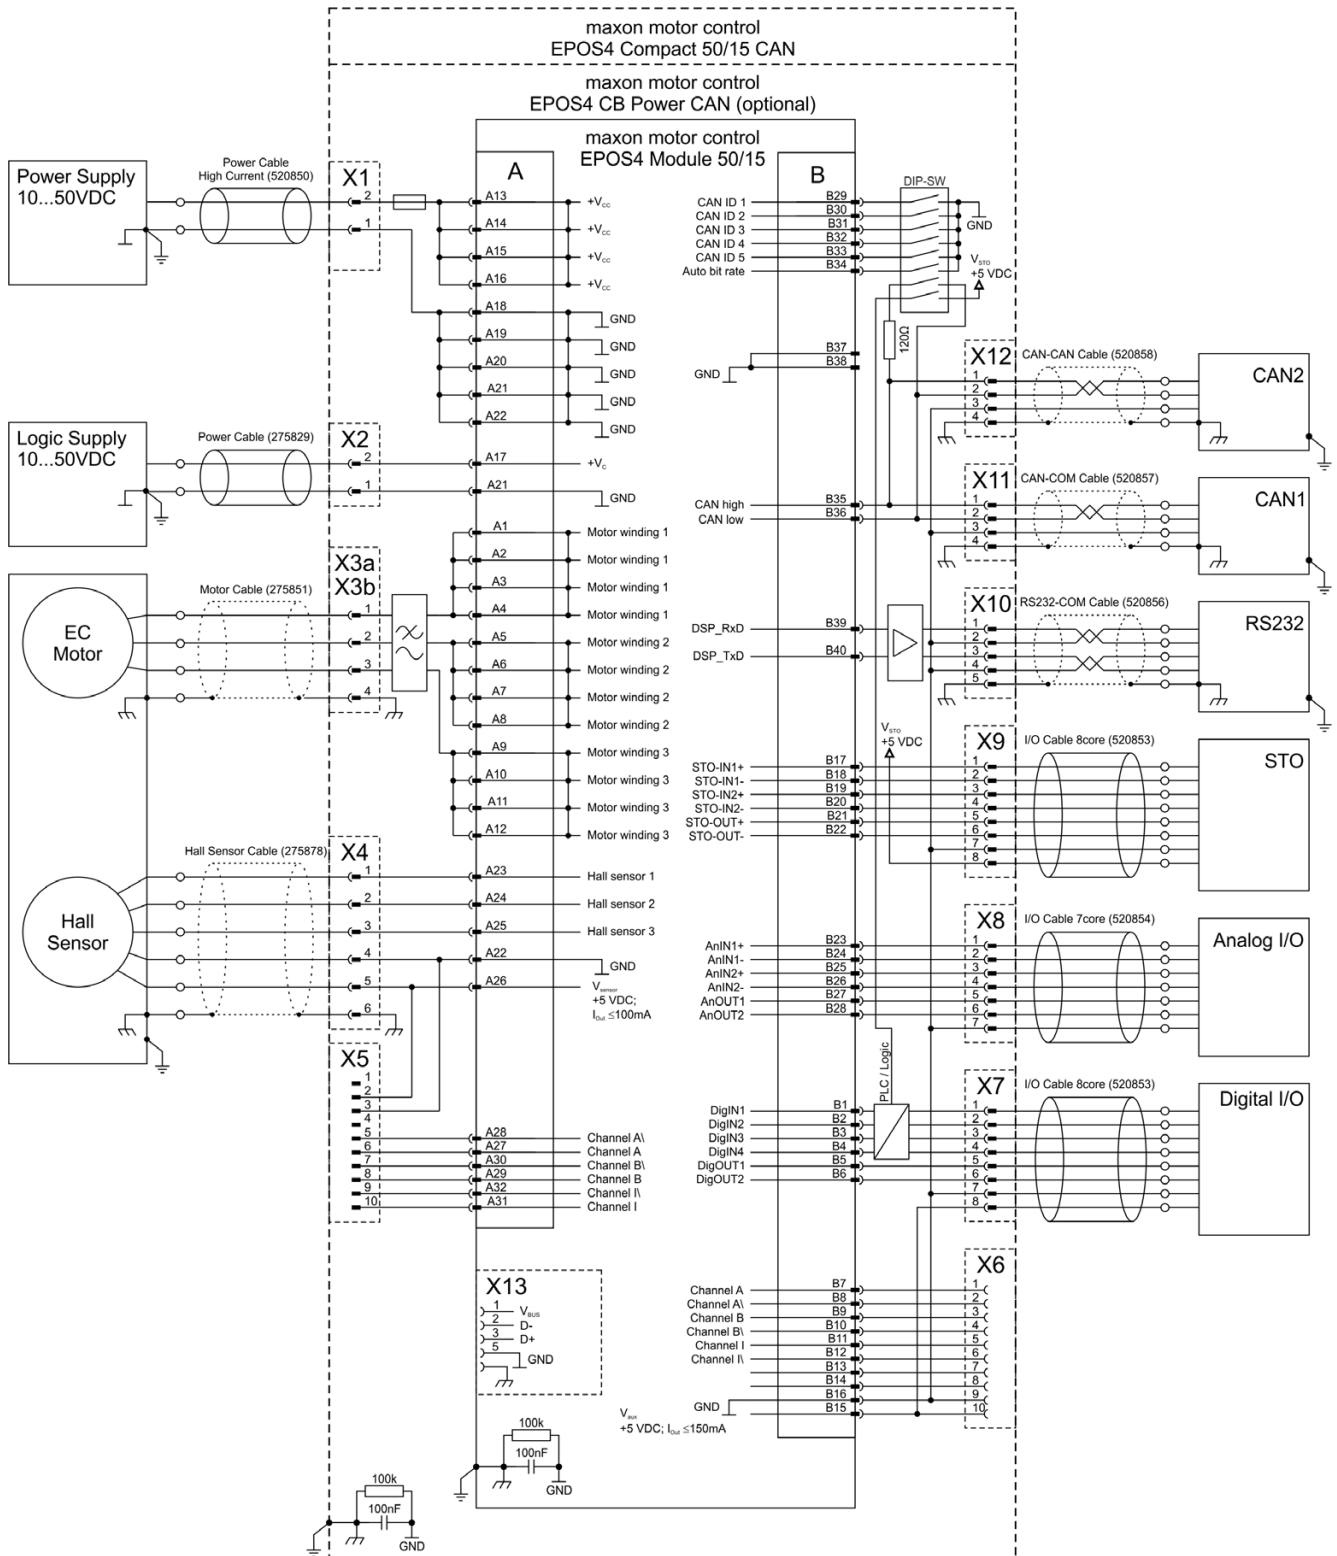


Figure 5-61 EC motor (Hall sensors)

## 5.3.2 EC Motor – Hall Sensors & Digital Incremental Encoder

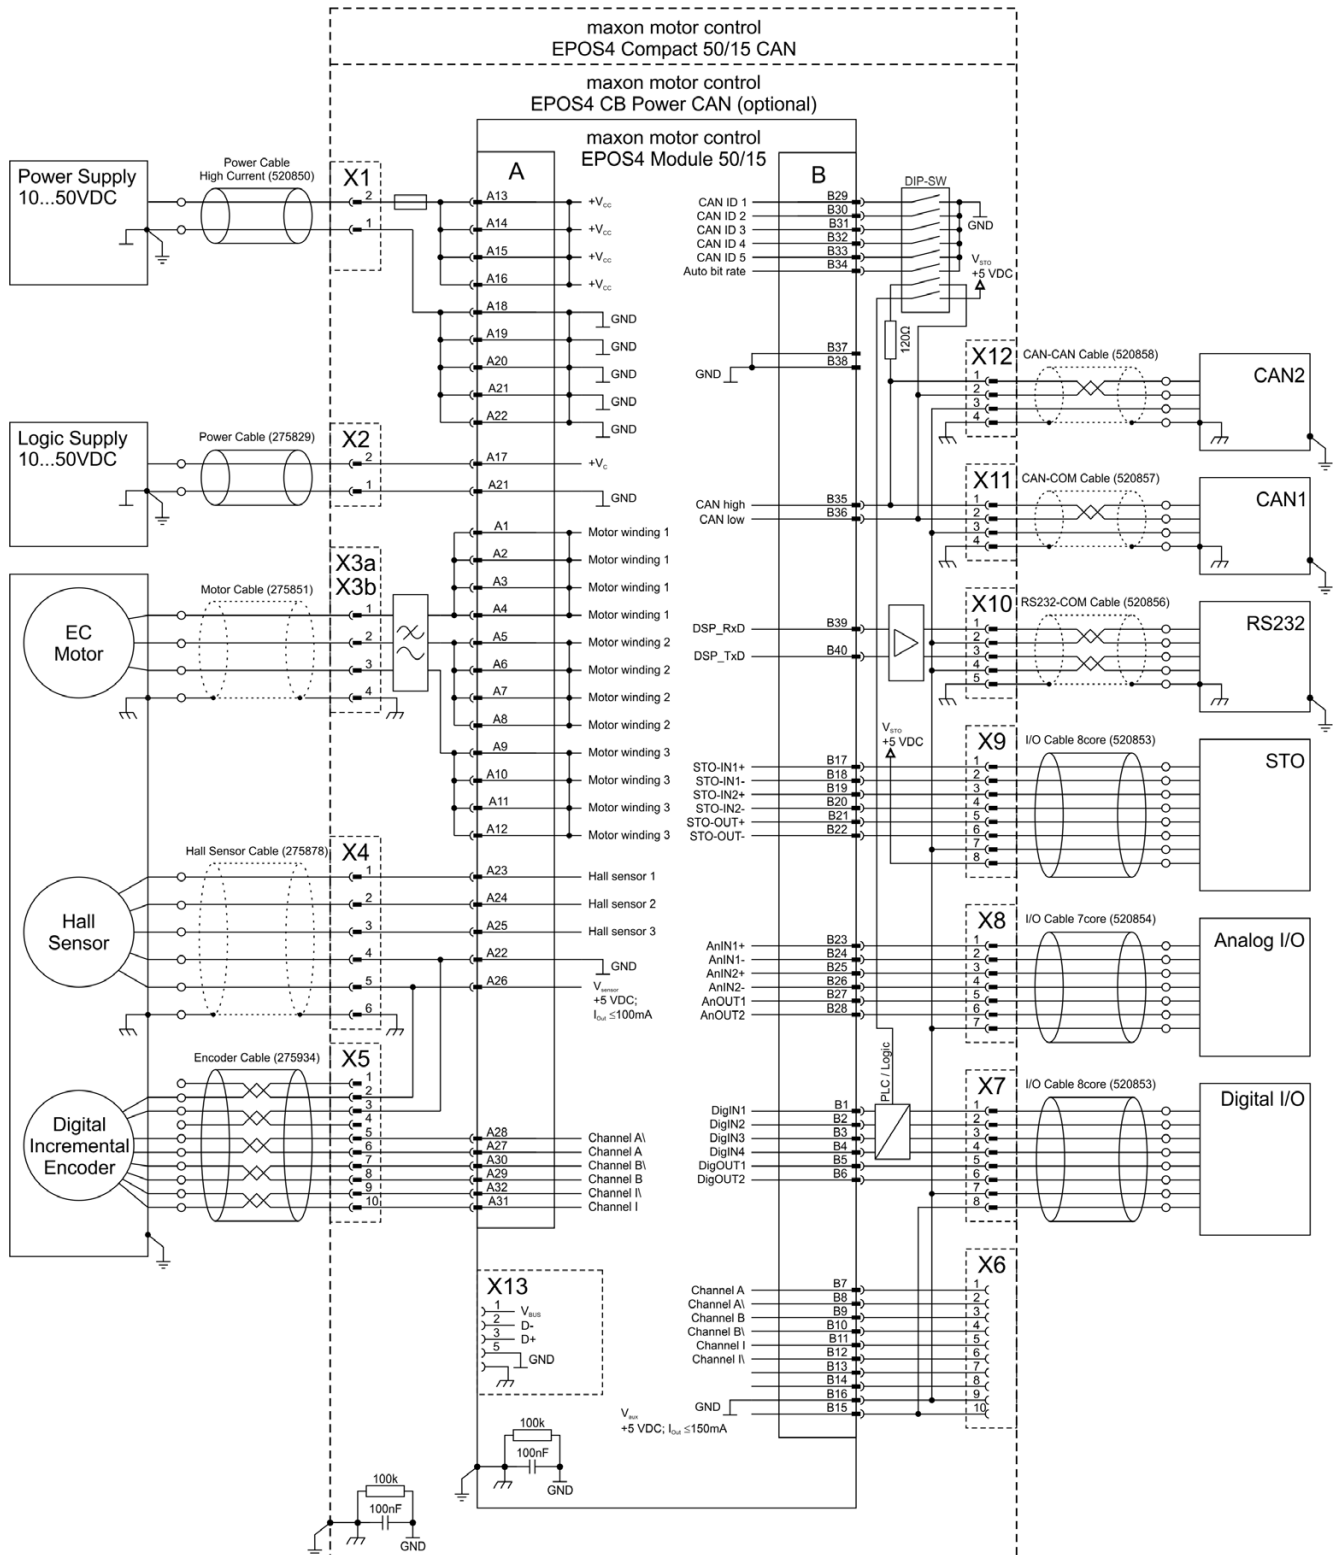


Figure 5-62 EC motor (Hall sensors & digital incremental encoder)

## 5.3.3 EC Motor – Hall Sensors & Analog Incremental Encoder\*

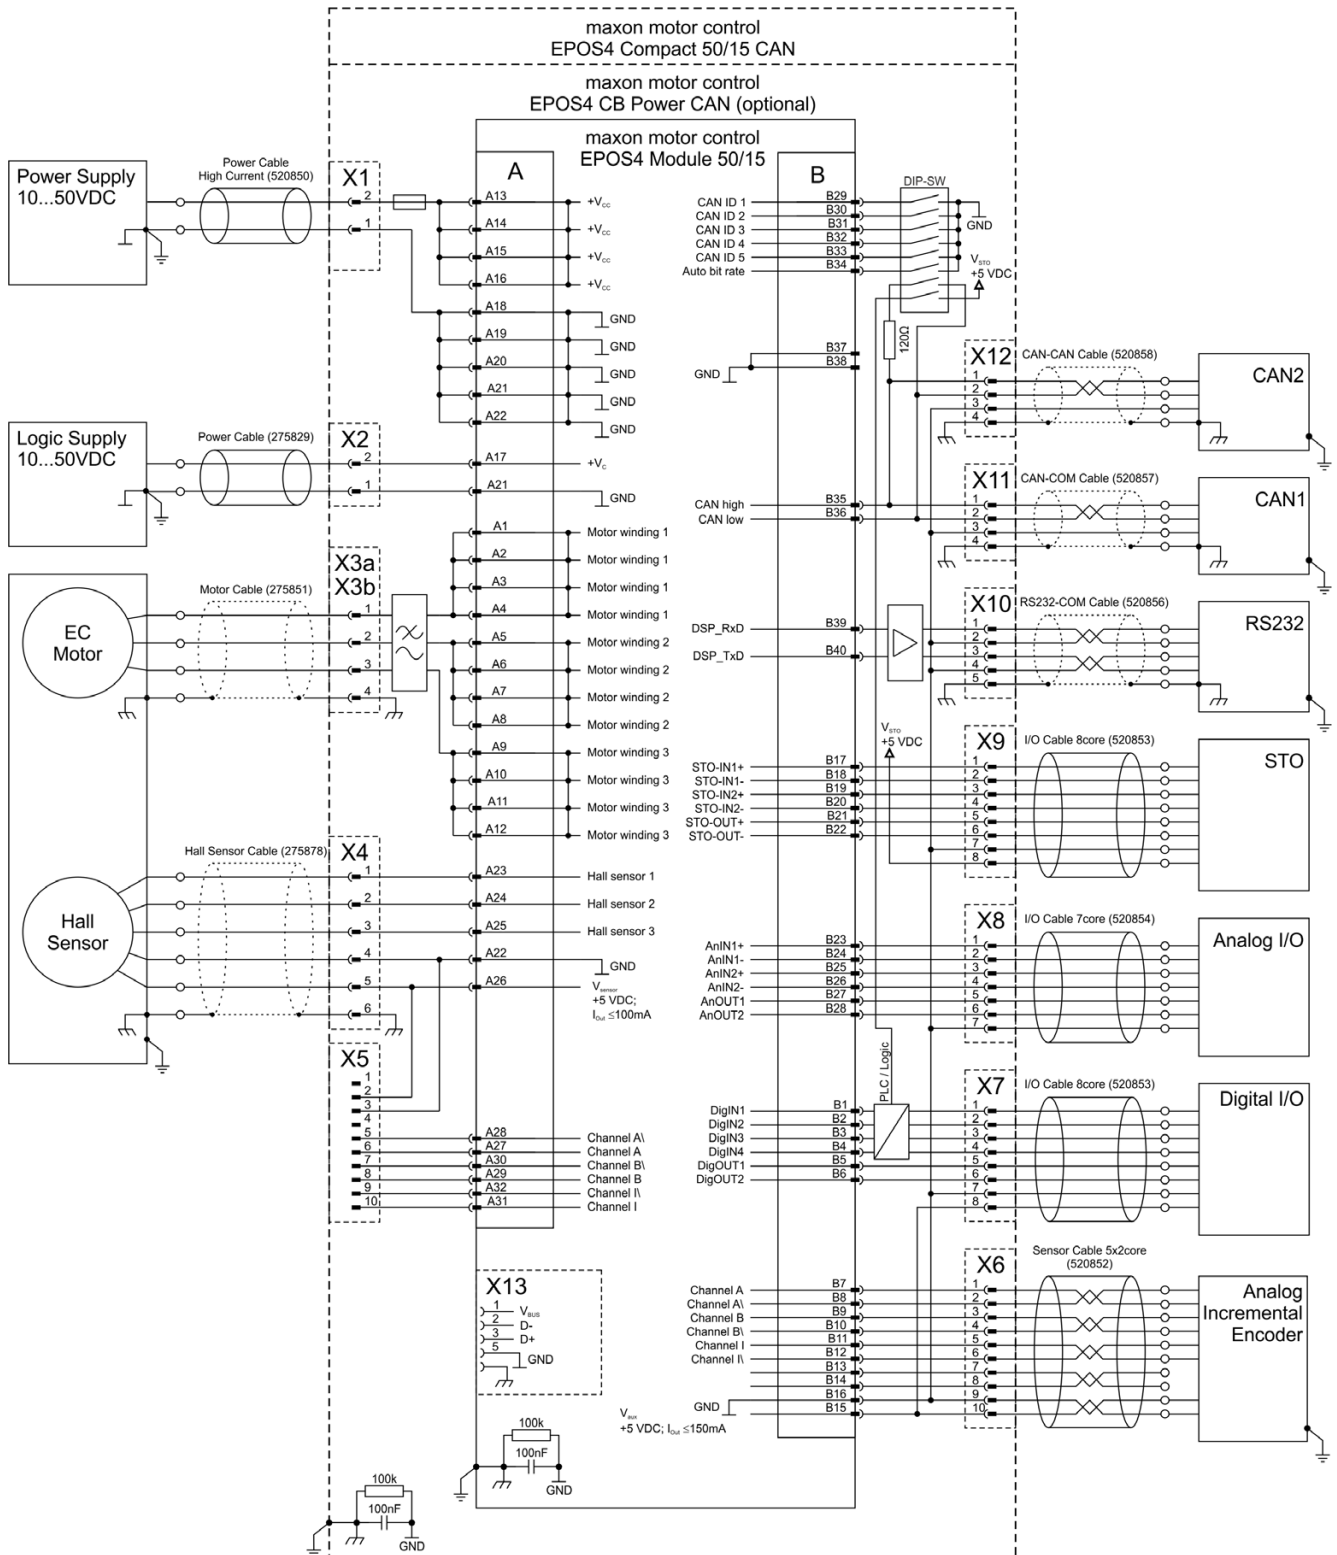


Figure 5-63 EC motor (Hall sensors & analog incremental encoder)

## 5.3.4 EC Motor – Hall Sensors & SSI Encoder

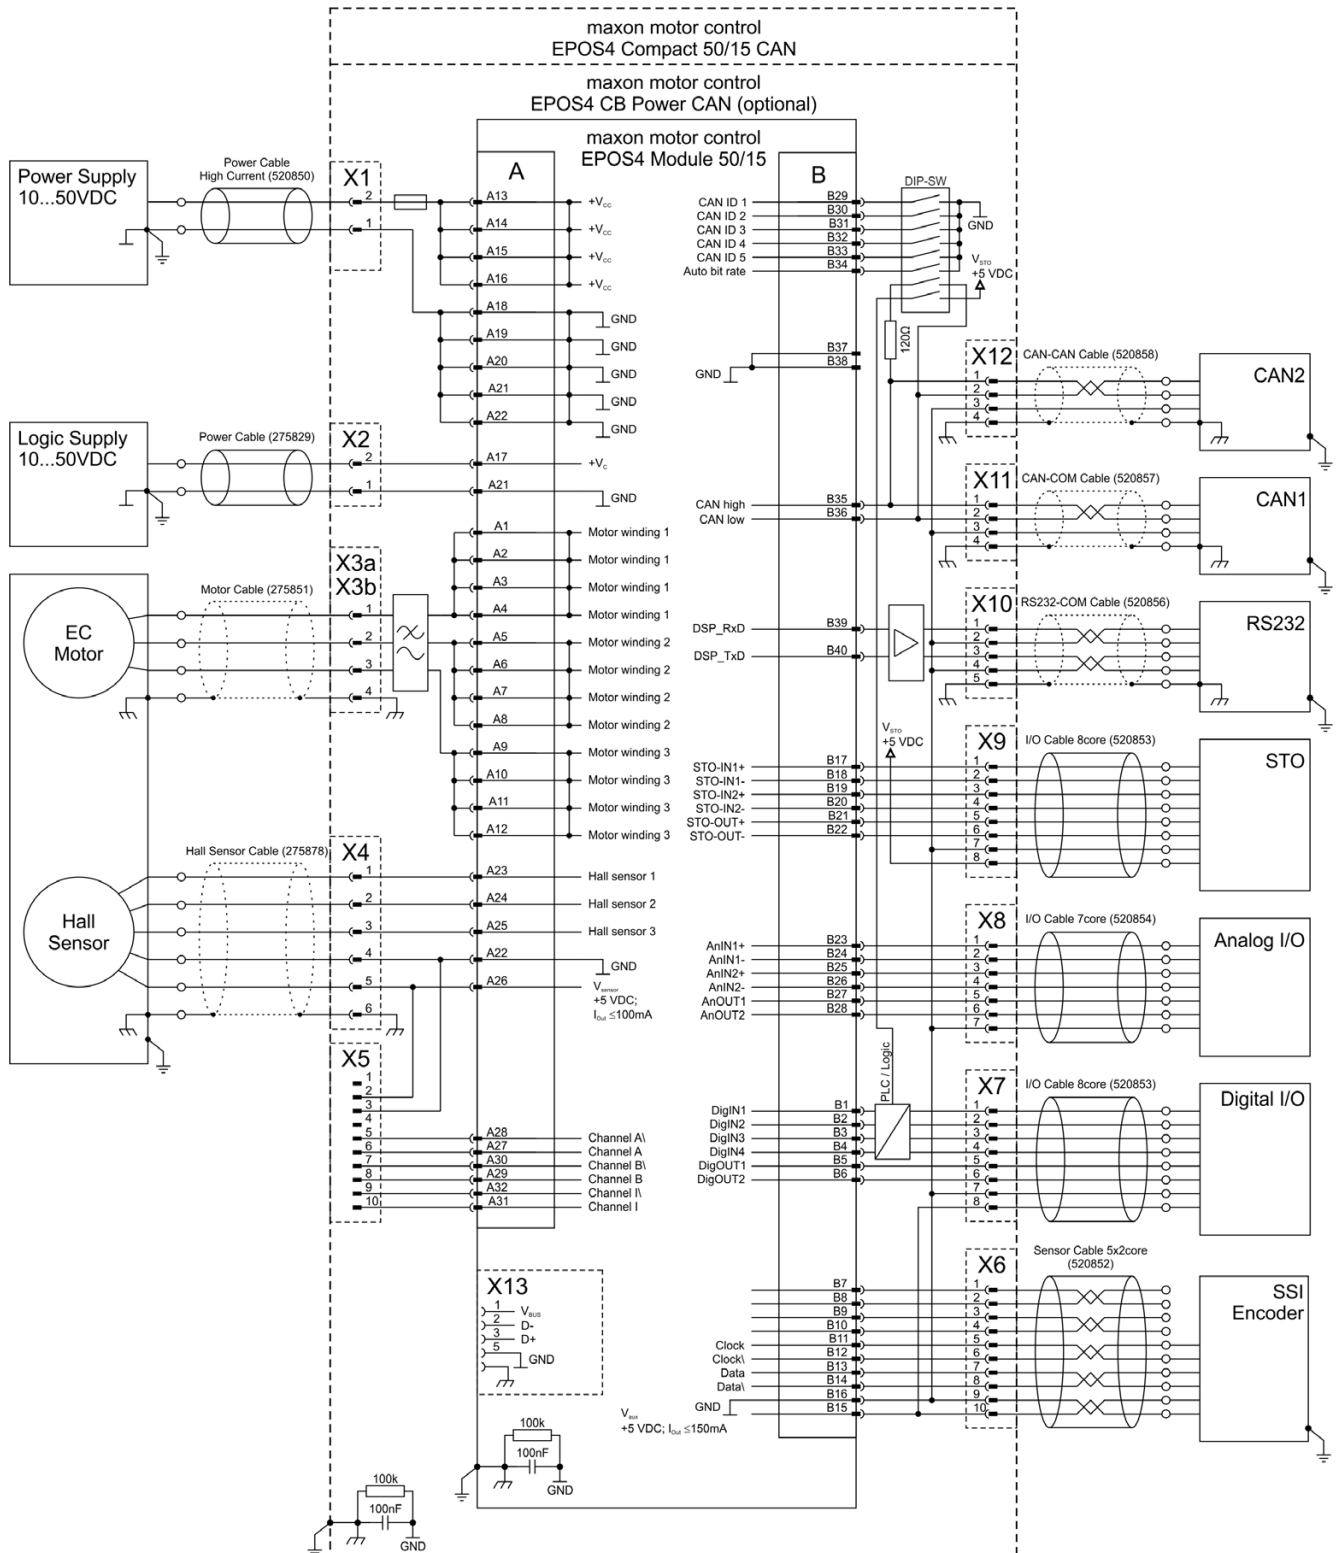


Figure 5-64 EC motor (Hall sensors & SSI encoder)

## 5.3.5 EC Motor – Hall Sensors & Digital & Digital Incremental Encoder\*

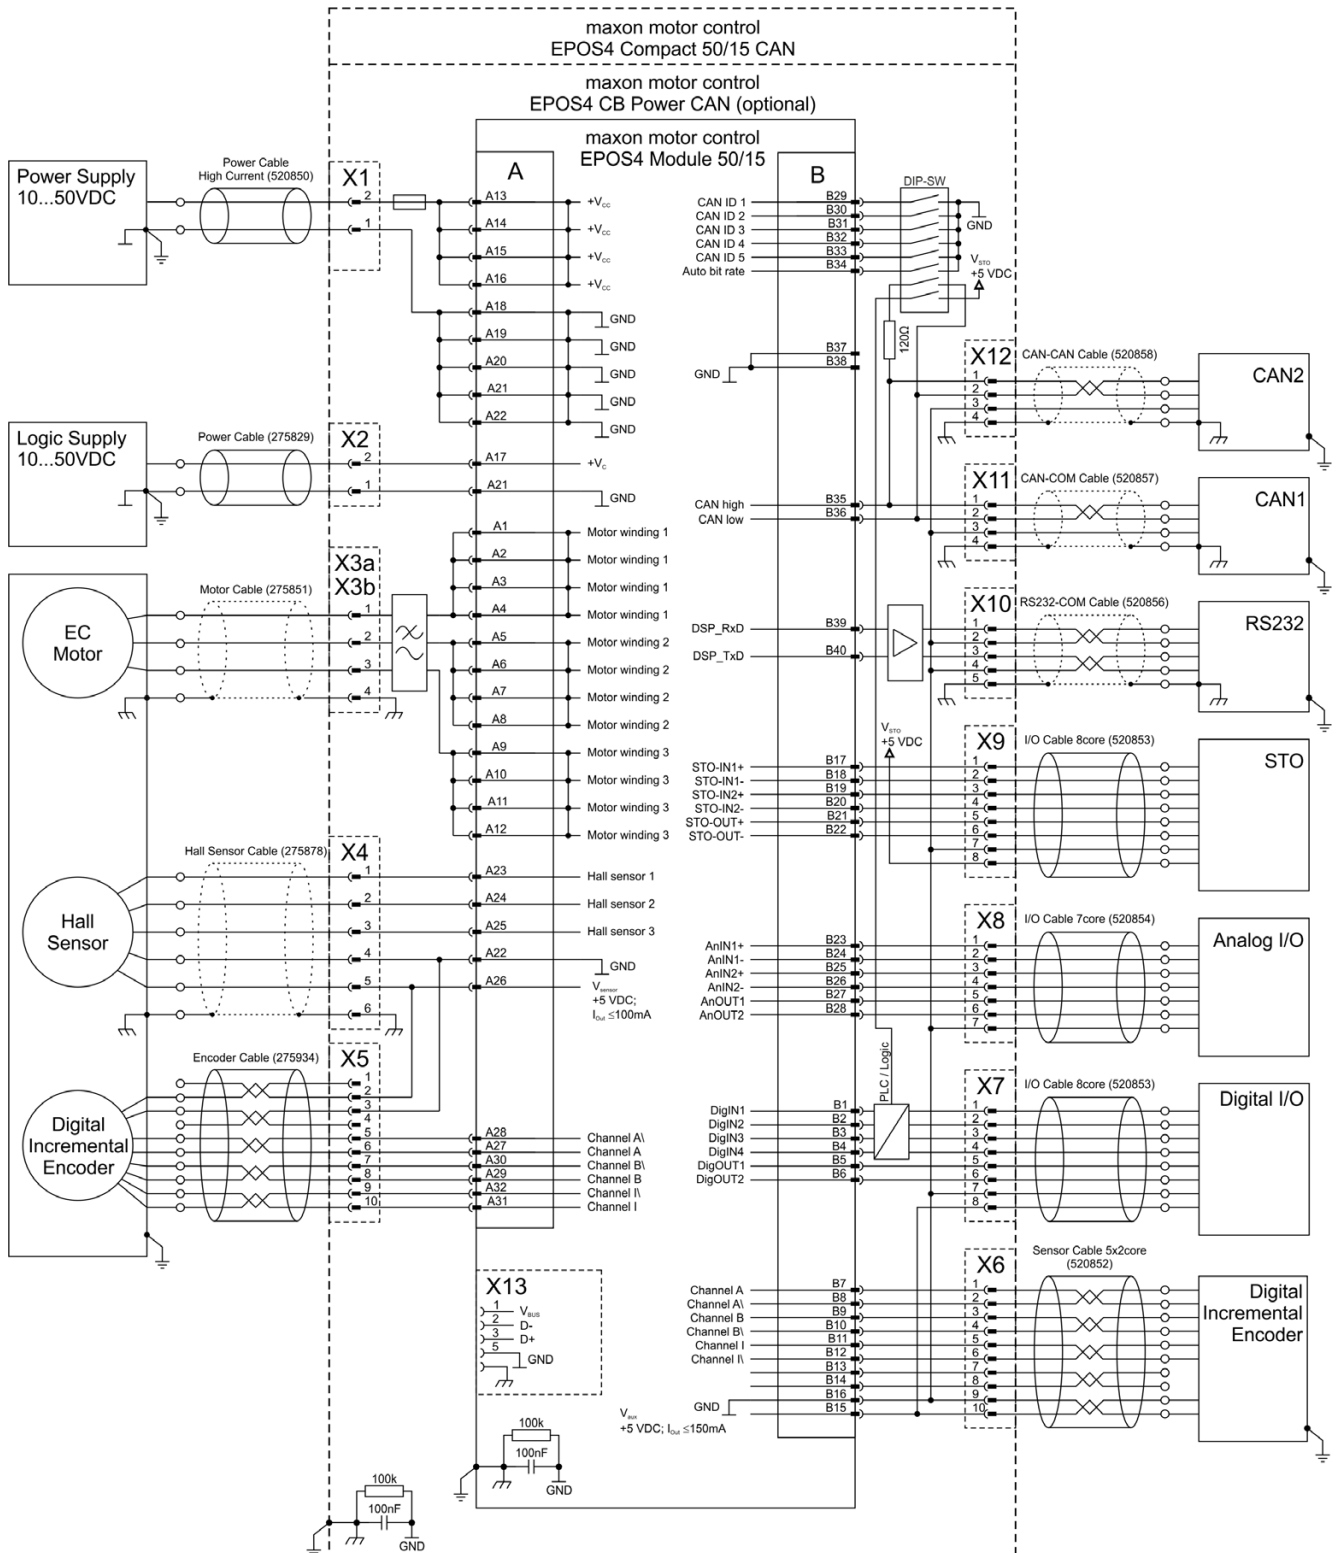


Figure 5-65 EC motor (Hall sensors & digital & digital incremental encoder)

## 5.3.6 EC Motor – Hall Sensors & Digital & Analog Incremental Encoder\*

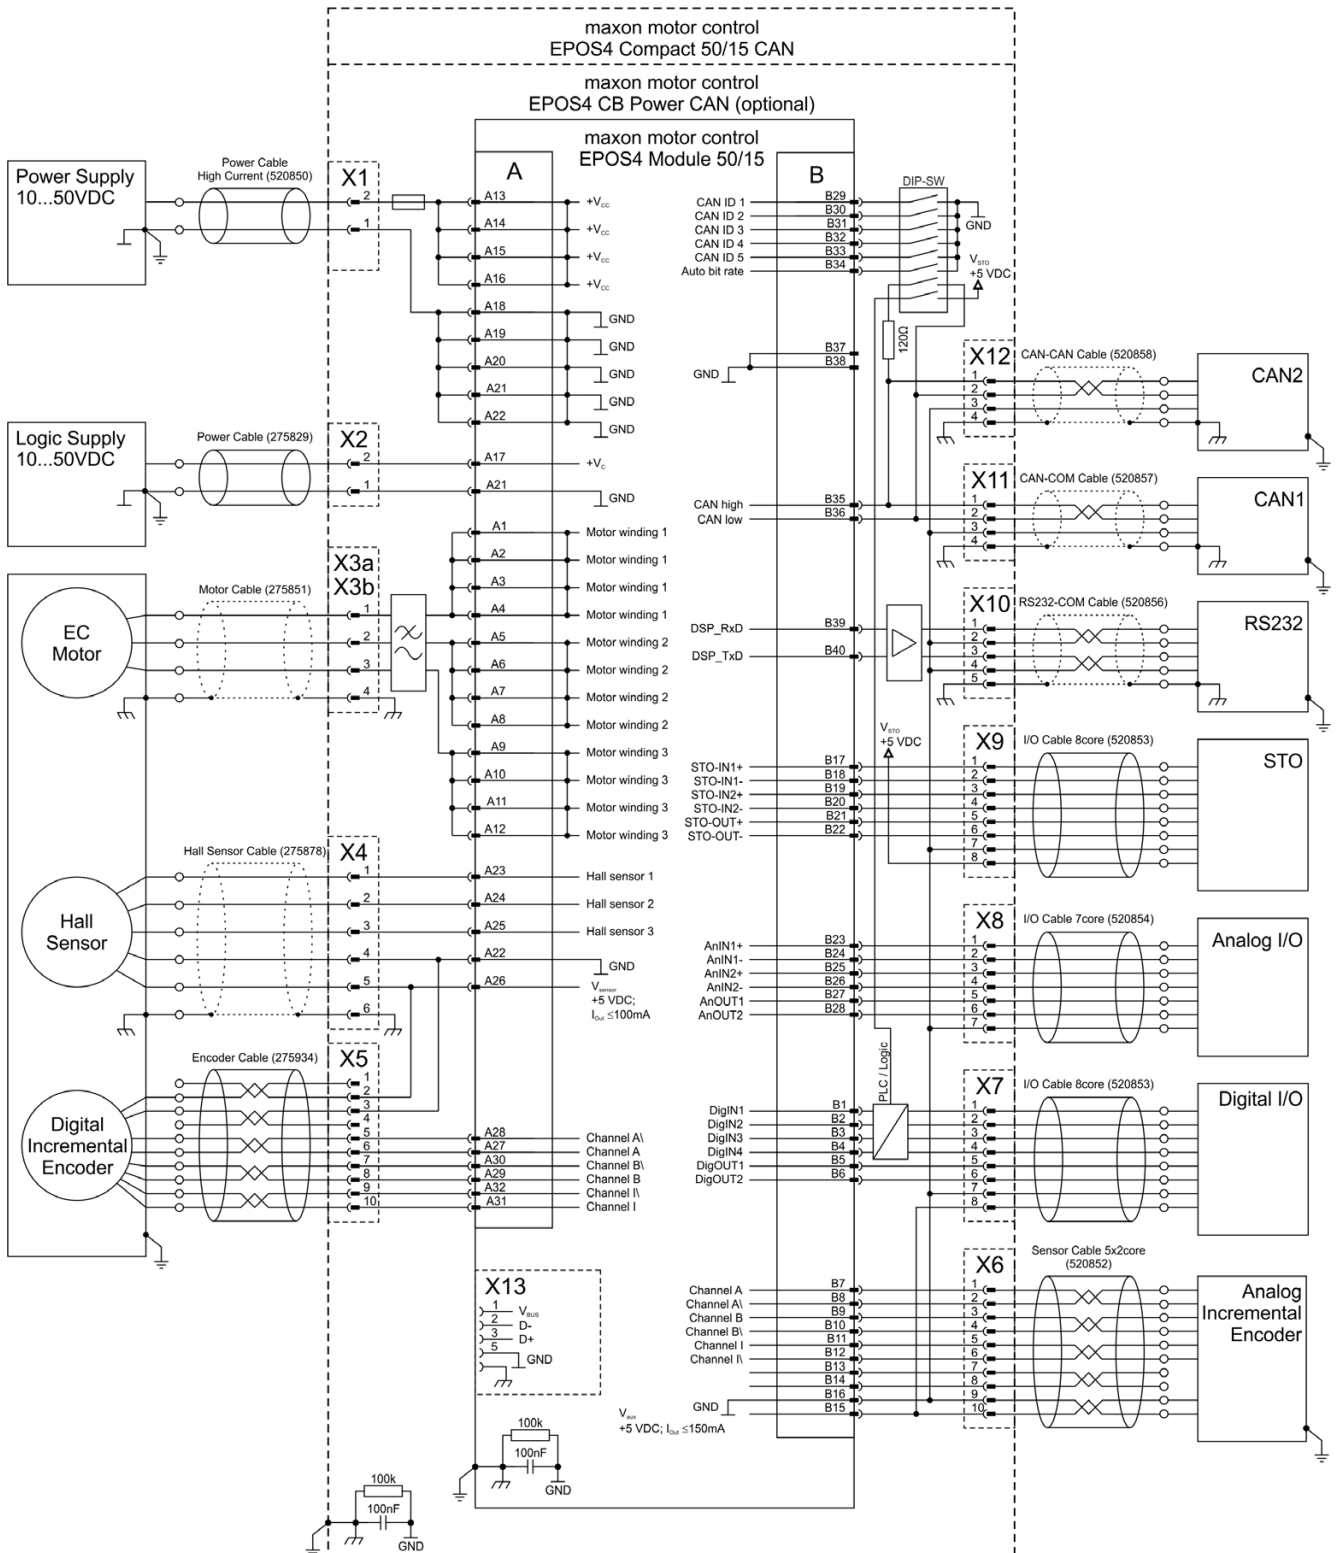


Figure 5-66 EC motor (Hall sensors & digital & analog incremental encoder)

## 5.3.7 EC Motor – Hall Sensors & Digital Incremental & SSI Encoder

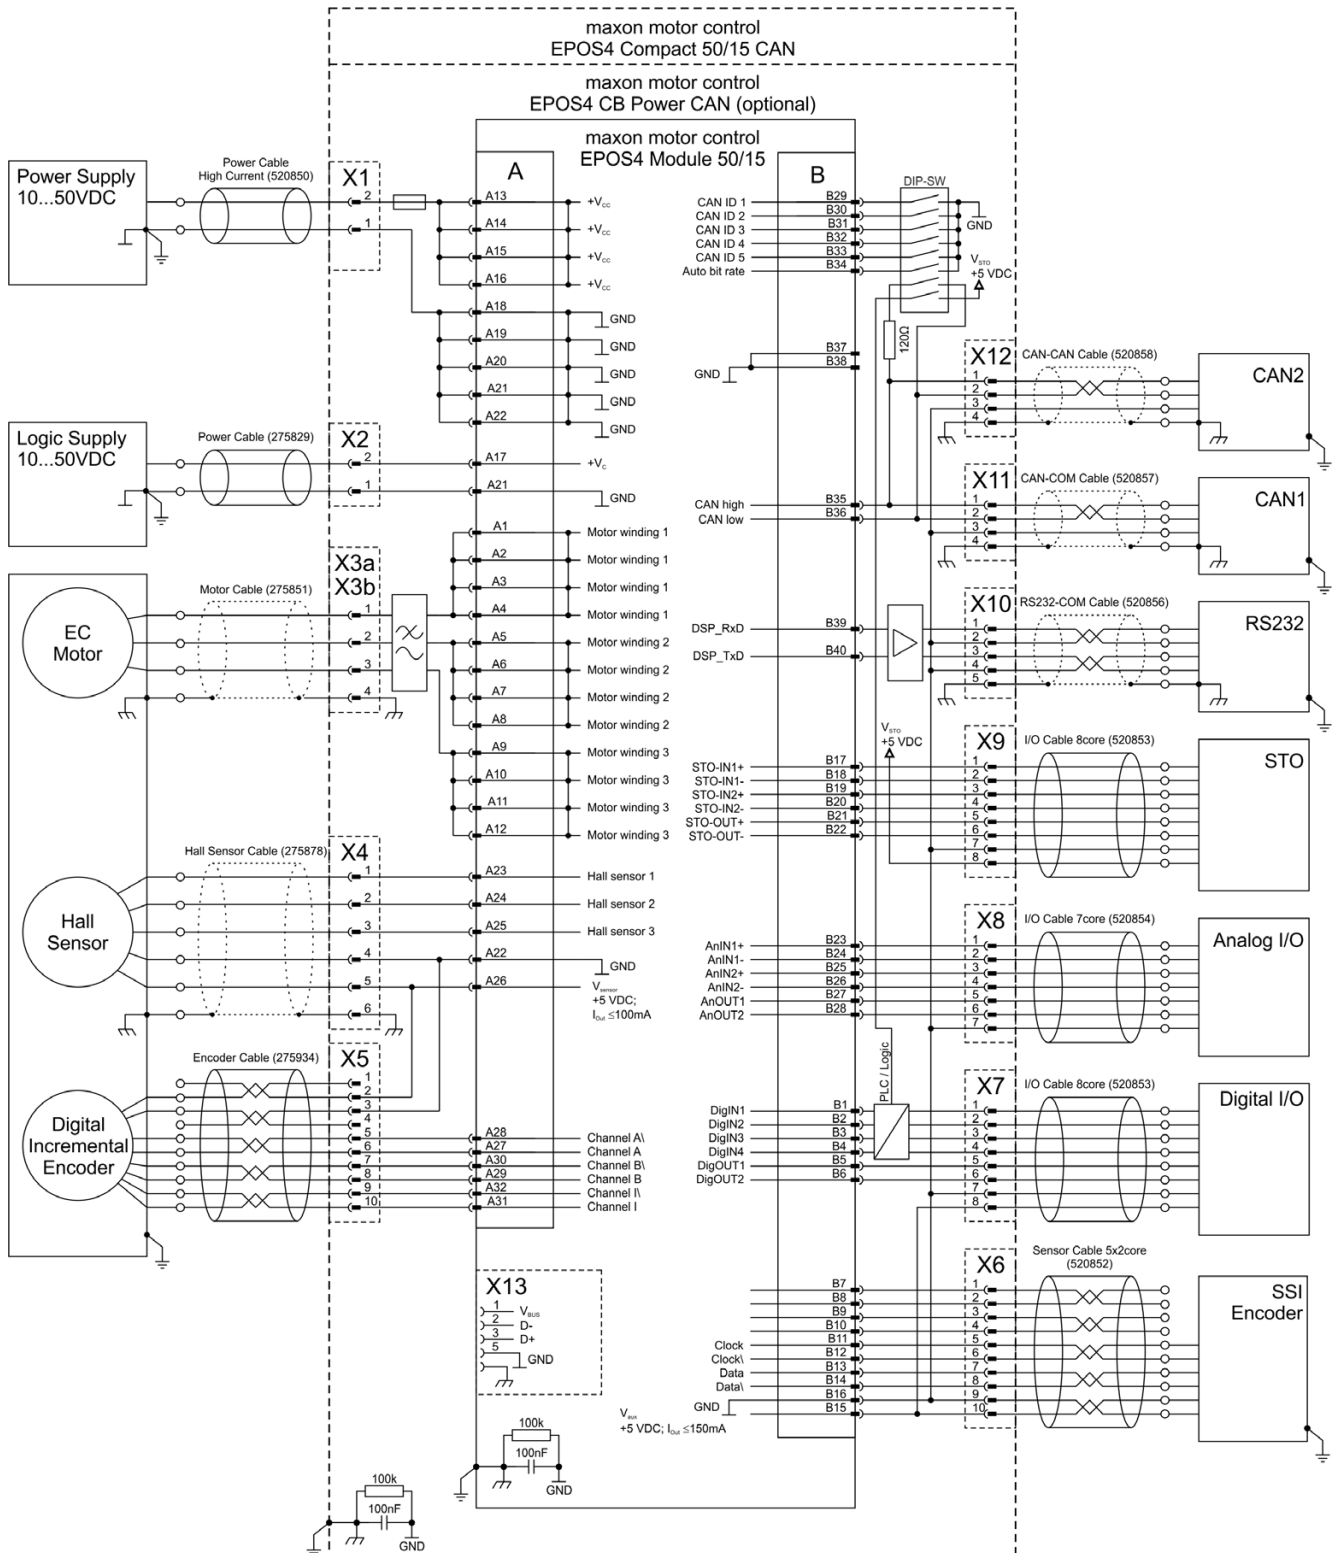


Figure 5-67 EC motor (Hall sensors & digital incremental & SSI encoder)

## 5.3.8 EC Motor – Digital Incremental Encoder\*

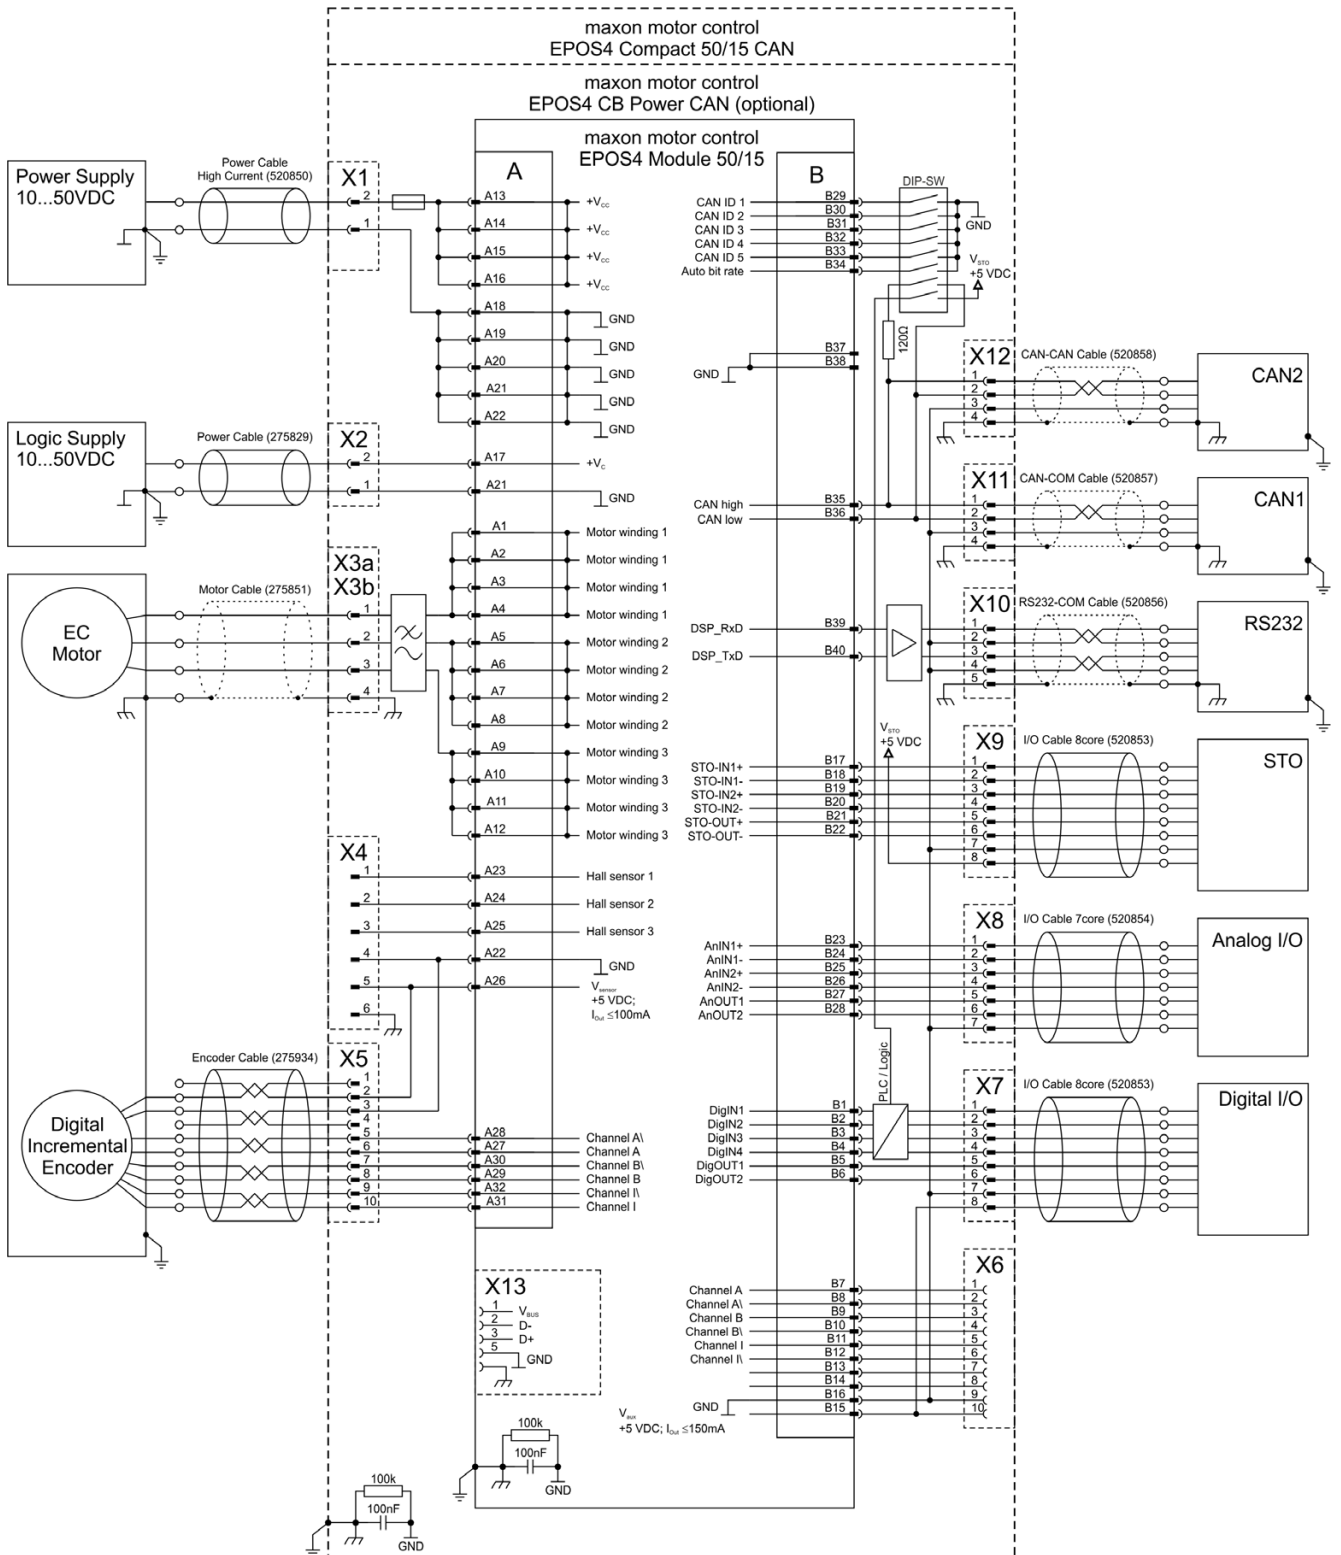


Figure 5-68 EC motor (digital incremental encoder)

## 5.3.9 EC Motor – Digital & Digital Incremental Encoder\*

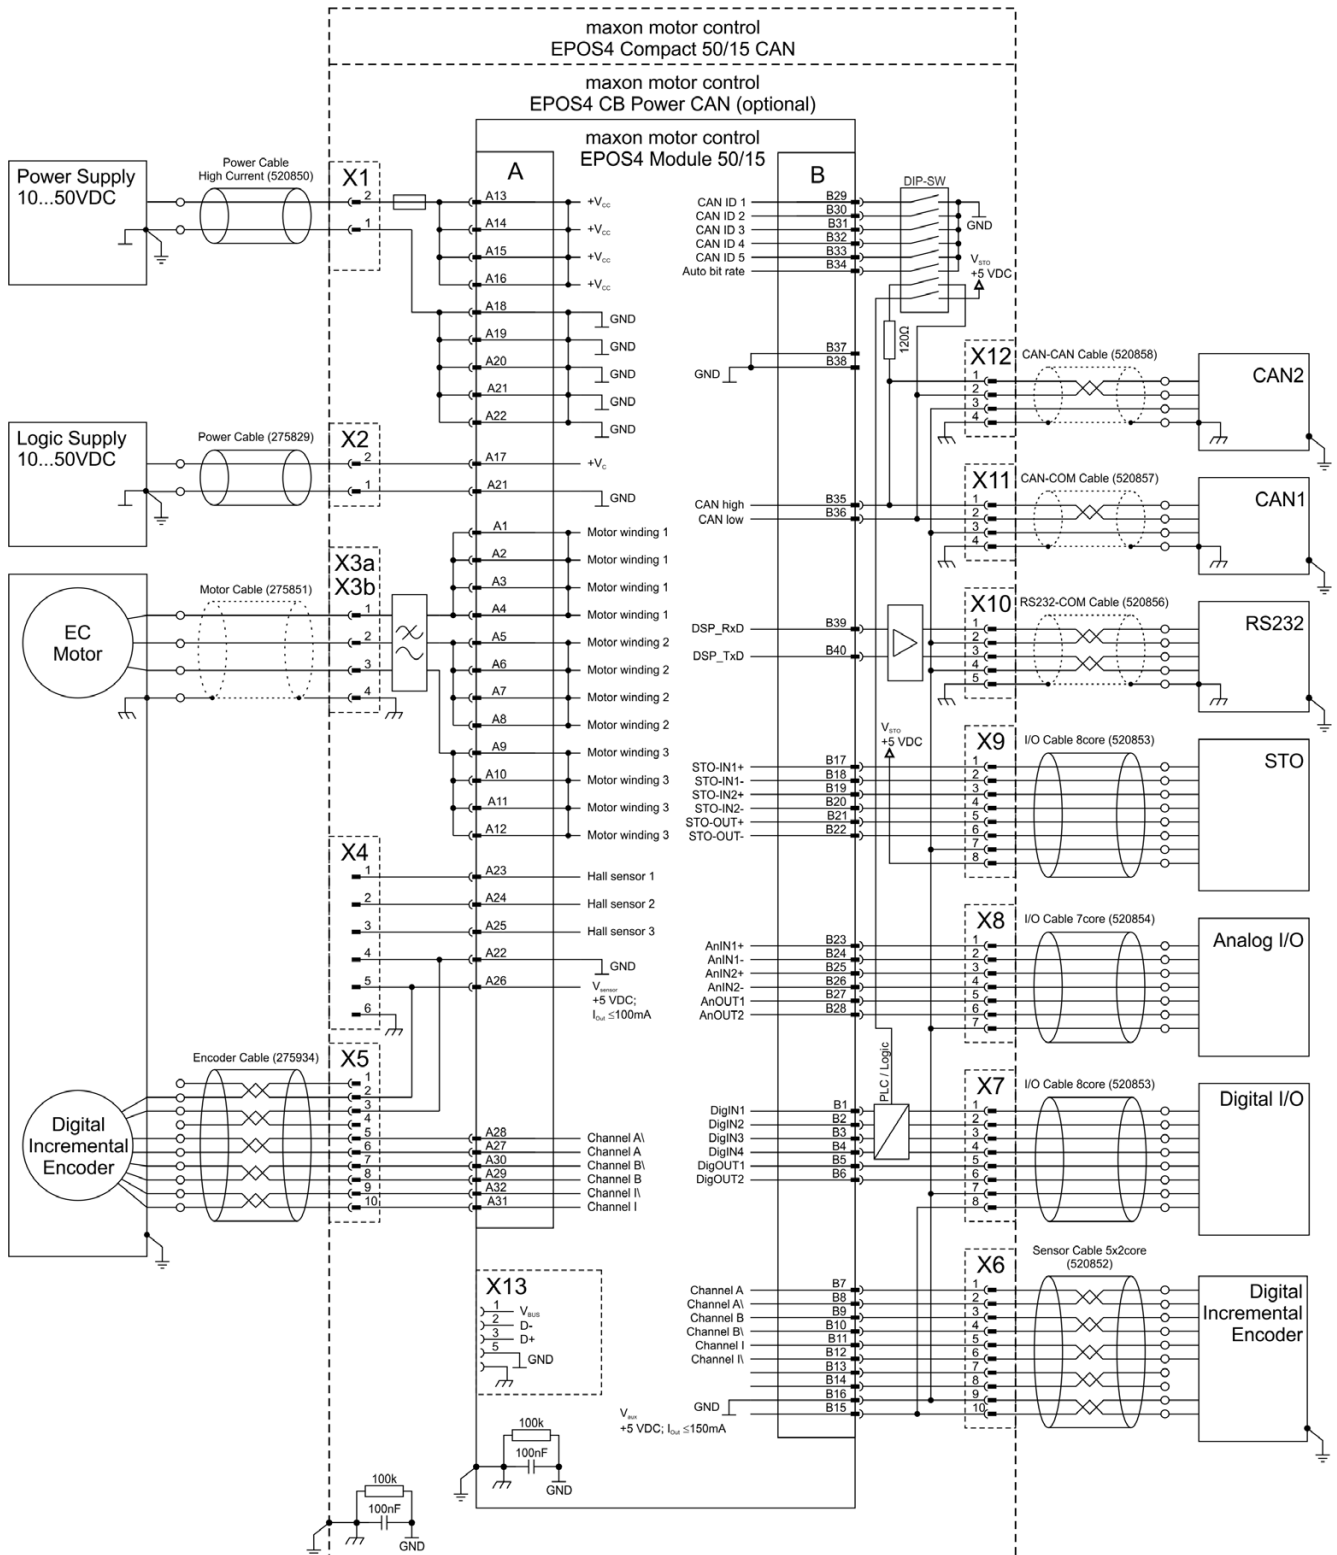


Figure 5-69 EC motor (digital & digital incremental encoder)

## 5.3.10 EC Motor – Digital & Analog Incremental Encoder\*

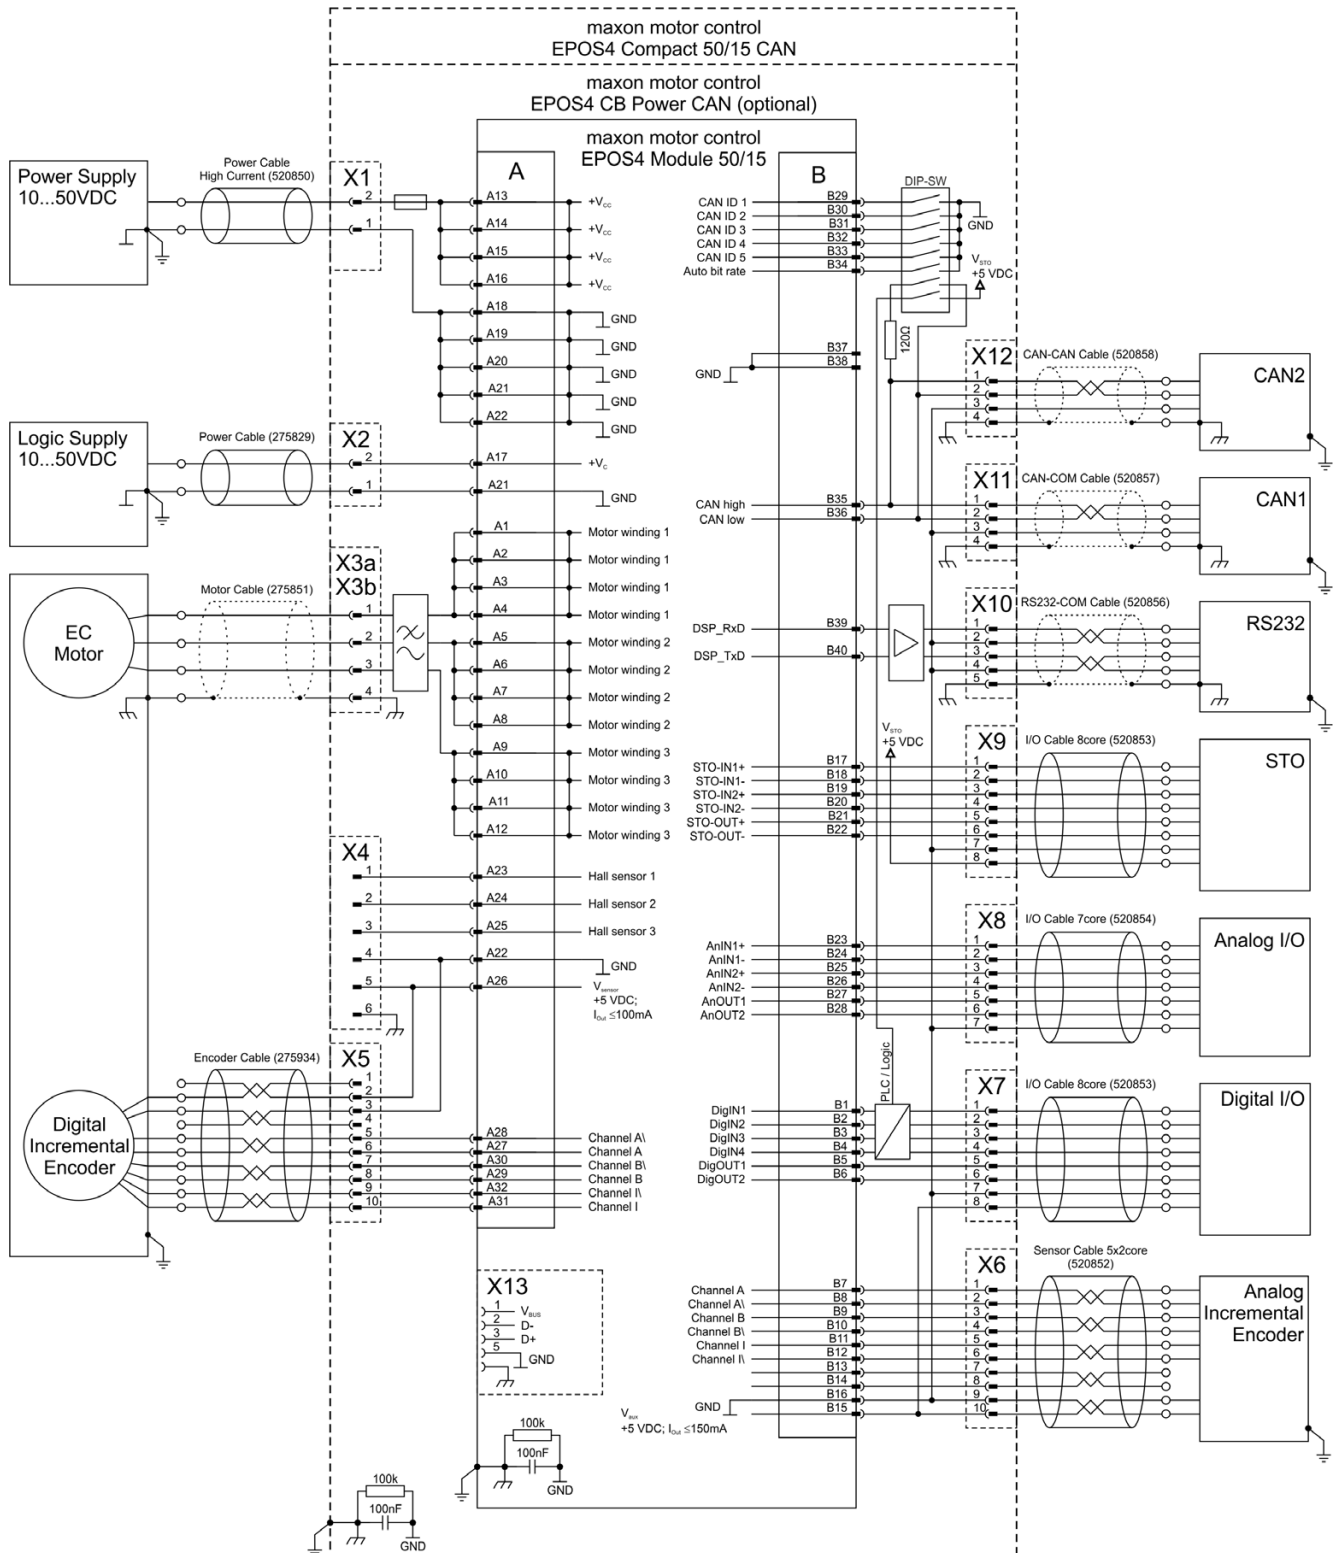


Figure 5-70 EC motor (digital & analog incremental encoder)

## 5.3.11 EC Motor – Digital Incremental & SSI Encoder\*

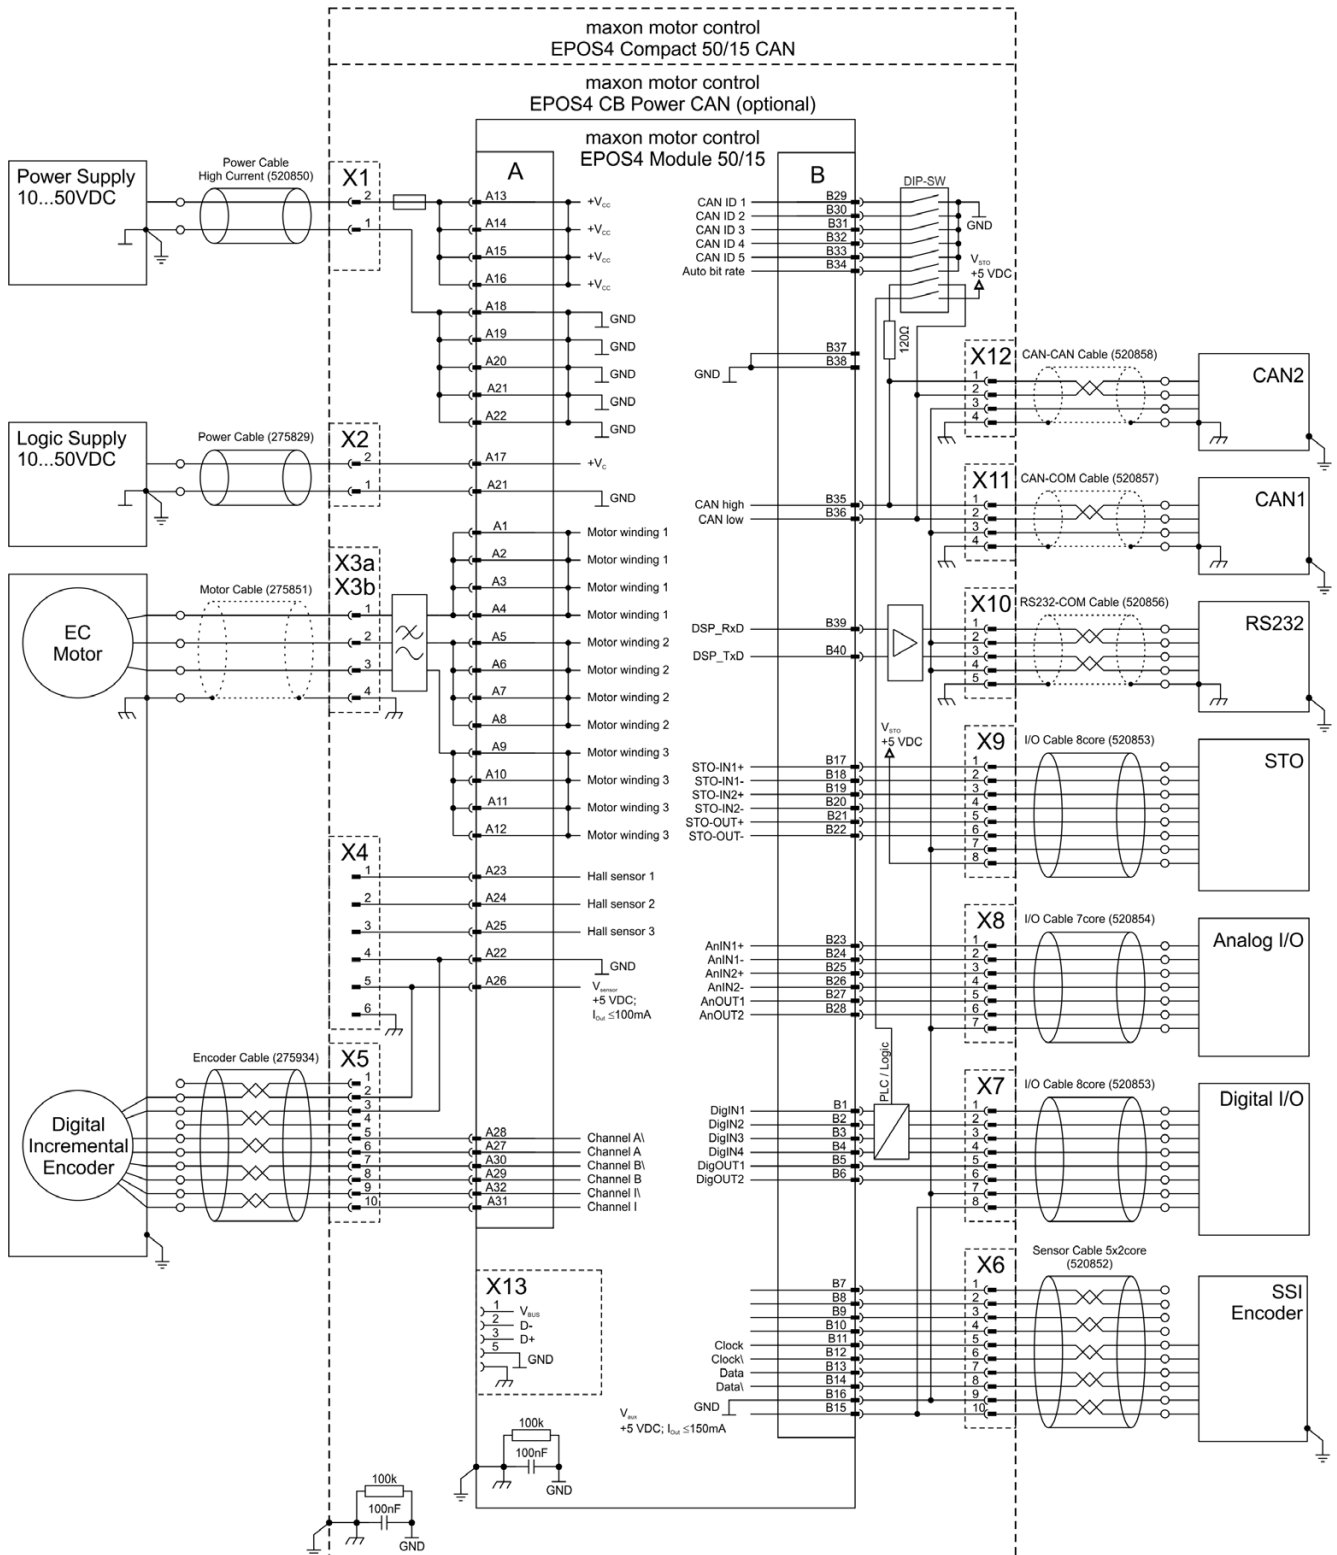


Figure 5-71 EC motor (digital & SSI encoder)

## 5.3.12 EC Motor – Analog Incremental Encoder\*

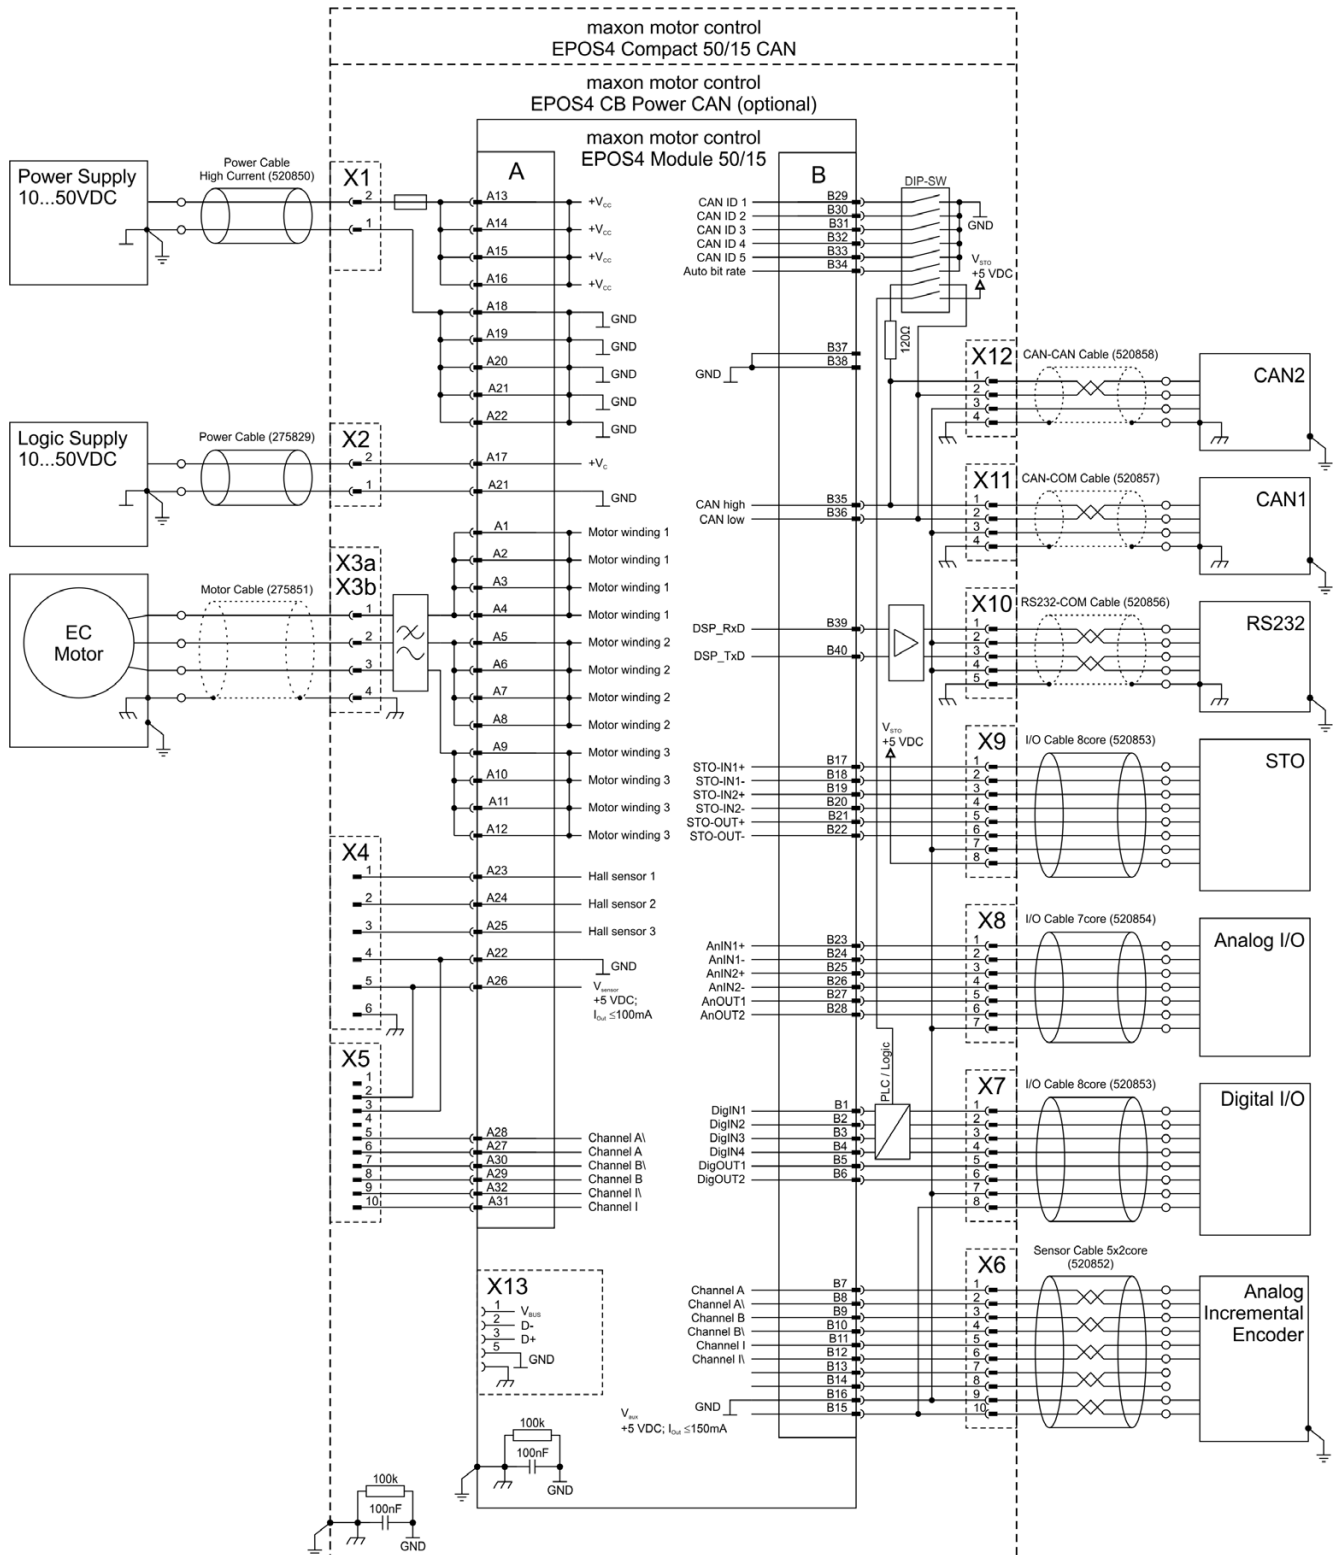


Figure 5-72 EC motor (analog incremental encoder)

## 5.3.13 EC Motor – SSI Encoder\*

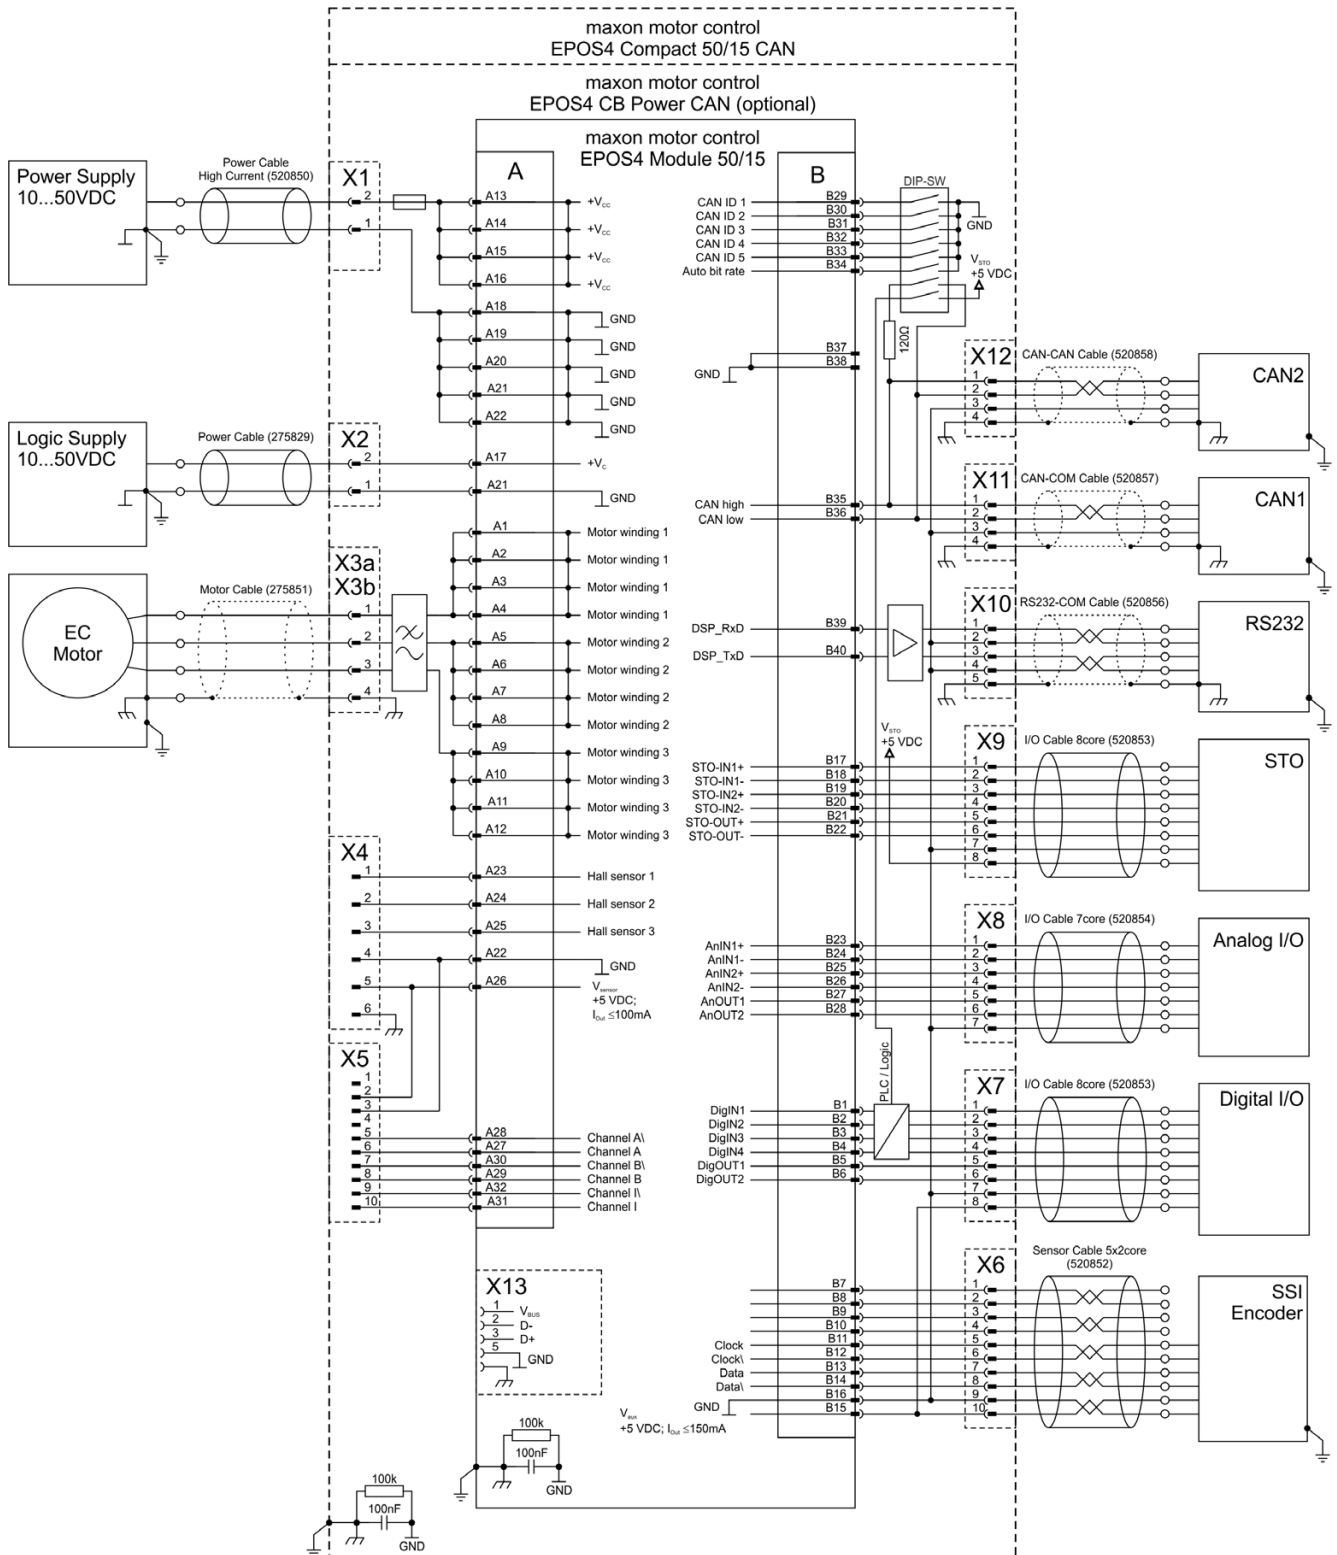


Figure 5-73 EC motor (SSI encoder)

## LIST OF FIGURES

|             |                                                                                                      |    |
|-------------|------------------------------------------------------------------------------------------------------|----|
| Figure 1-1  | Documentation structure. . . . .                                                                     | 5  |
| Figure 1-2  | Configuration overview. . . . .                                                                      | 8  |
| Figure 2-3  | Derating of output current (operation without additional heat sink) . . . . .                        | 13 |
| Figure 2-4  | Power dissipation and efficiency. . . . .                                                            | 15 |
| Figure 2-5  | EPOS4 Module 50/15 – Dimensional drawing [mm]. . . . .                                               | 15 |
| Figure 2-6  | EPOS4 CB Power CAN – Dimensional drawing [mm] . . . . .                                              | 16 |
| Figure 2-7  | EPOS4 Compact 50/15 CAN – Dimensional drawing [mm] . . . . .                                         | 16 |
| Figure 3-8  | Pin assignment. . . . .                                                                              | 20 |
| Figure 3-9  | EPOS4 CB Power CAN (left) / EPOS4 Compact 50/15 CAN (right) . . . . .                                | 23 |
| Figure 3-10 | EPOS4 CB Power CAN – Connectors . . . . .                                                            | 25 |
| Figure 3-11 | Power supply connector X1 . . . . .                                                                  | 26 |
| Figure 3-12 | Logic supply connector X2 . . . . .                                                                  | 27 |
| Figure 3-13 | Motor connectors X3a (left) and X3b (right) . . . . .                                                | 28 |
| Figure 3-14 | Hall sensor connector X4 . . . . .                                                                   | 30 |
| Figure 3-15 | Encoder connector X5 . . . . .                                                                       | 31 |
| Figure 3-16 | Sensor connector X6 . . . . .                                                                        | 32 |
| Figure 3-17 | Digital I/O connector X7 . . . . .                                                                   | 34 |
| Figure 3-18 | Analog I/O connector X8. . . . .                                                                     | 35 |
| Figure 3-19 | STO connector X9 . . . . .                                                                           | 36 |
| Figure 3-20 | RS232 connector X10. . . . .                                                                         | 37 |
| Figure 3-21 | CAN 1 connector X11 and CAN 2 connector X12 . . . . .                                                | 38 |
| Figure 3-22 | EPOS4 CB Power CAN – DIP switch SW1 . . . . .                                                        | 39 |
| Figure 3-23 | Hall sensor 1 input circuit (analogously valid for Hall sensors 2 & 3) . . . . .                     | 45 |
| Figure 3-24 | Encoder input circuit Ch A “differential” (analogously valid for Ch B & Ch I) . . . . .              | 47 |
| Figure 3-25 | Encoder input circuit Ch A “single-ended” (analogously valid for Ch B & Ch I) . . . . .              | 47 |
| Figure 3-26 | Digital incremental encoder input circuit Ch A “differential” (analogously valid for Ch B) . . . . . | 49 |
| Figure 3-27 | Digital incremental encoder input circuit Ch I . . . . .                                             | 49 |
| Figure 3-28 | Digital incremental encoder input circuit Ch A “single-ended” (analogously valid for Ch B) . . . . . | 50 |
| Figure 3-29 | Digital incremental encoder input circuit Ch I . . . . .                                             | 51 |
| Figure 3-30 | Analog incremental encoder input circuit Ch A “differential” (analogously valid for Ch B) . . . . .  | 52 |
| Figure 3-31 | Analog incremental encoder input circuit Ch I (digital evaluation) . . . . .                         | 53 |
| Figure 3-32 | SSI absolute encoder data input. . . . .                                                             | 54 |
| Figure 3-33 | SSI absolute encoder clock output . . . . .                                                          | 55 |
| Figure 3-34 | HsDigIN1 circuit “differential” (analogously valid for HsDigIN2...4) . . . . .                       | 56 |
| Figure 3-35 | HsDigIN1 circuit “single-ended” (analogously valid for HsDigIN2...4) . . . . .                       | 57 |
| Figure 3-36 | HsDigOUT1 output circuit. . . . .                                                                    | 58 |
| Figure 3-37 | DigIN1 circuit (analogously valid for DigIN2...4) – Module. . . . .                                  | 59 |
| Figure 3-38 | DigIN1 circuit (analogously valid for DigIN2...4) – Compact / Logic level setting. . . . .           | 60 |
| Figure 3-39 | DigIN1 circuit (analogously valid for DigIN2...4) – Compact / PLC level setting . . . . .            | 61 |
| Figure 3-40 | DigOUT1 circuit (analogously valid for DigOUT2 and Compact) . . . . .                                | 61 |
| Figure 3-41 | DigOUT1 “sinks” (analogously valid for DigOUT2 and Compact). . . . .                                 | 62 |
| Figure 3-42 | DigOUT1 “source” (analogously valid for DigOUT2 and Compact) . . . . .                               | 62 |

|             |                                                                                       |     |
|-------------|---------------------------------------------------------------------------------------|-----|
| Figure 3-43 | STO-IN1 circuit (analogously valid for STO-IN2) . . . . .                             | 63  |
| Figure 3-44 | STO-OUT circuit. . . . .                                                              | 64  |
| Figure 3-45 | AnIN1 circuit (analogously valid for AnIN2) . . . . .                                 | 65  |
| Figure 3-46 | AnOUT1 circuit (analogously valid for AnOUT2) . . . . .                               | 66  |
| Figure 3-47 | USB connector X13 . . . . .                                                           | 73  |
| Figure 3-48 | Status LED . . . . .                                                                  | 74  |
| Figure 4-49 | Wiring of power supply . . . . .                                                      | 76  |
| Figure 4-50 | Wiring of logic supply . . . . .                                                      | 77  |
| Figure 4-51 | Wiring of motor winding 1 (analogously valid also for motor windings 2 & 3) . . . . . | 79  |
| Figure 4-52 | THT footprint [mm] – Top View . . . . .                                               | 81  |
| Figure 5-53 | Interfaces – Designations and location . . . . .                                      | 83  |
| Figure 5-54 | DC motor (no sensor). . . . .                                                         | 85  |
| Figure 5-55 | DC motor (digital incremental encoder) . . . . .                                      | 86  |
| Figure 5-56 | DC motor (digital & digital incremental encoder) . . . . .                            | 87  |
| Figure 5-57 | DC motor (digital & analog incremental encoder) . . . . .                             | 88  |
| Figure 5-58 | DC motor (digital incremental & SSI encoder) . . . . .                                | 89  |
| Figure 5-59 | DC motor (analog incremental encoder) . . . . .                                       | 90  |
| Figure 5-60 | DC motor (SSI encoder). . . . .                                                       | 91  |
| Figure 5-61 | EC motor (Hall sensors) . . . . .                                                     | 92  |
| Figure 5-62 | EC motor (Hall sensors & digital incremental encoder) . . . . .                       | 93  |
| Figure 5-63 | EC motor (Hall sensors & analog incremental encoder) . . . . .                        | 94  |
| Figure 5-64 | EC motor (Hall sensors & SSI encoder). . . . .                                        | 95  |
| Figure 5-65 | EC motor (Hall sensors & digital & digital incremental encoder) . . . . .             | 96  |
| Figure 5-66 | EC motor (Hall sensors & digital & analog incremental encoder) . . . . .              | 97  |
| Figure 5-67 | EC motor (Hall sensors & digital incremental & SSI encoder) . . . . .                 | 98  |
| Figure 5-68 | EC motor (digital incremental encoder) . . . . .                                      | 99  |
| Figure 5-69 | EC motor (digital & digital incremental encoder) . . . . .                            | 100 |
| Figure 5-70 | EC motor (digital & analog incremental encoder). . . . .                              | 101 |
| Figure 5-71 | EC motor (digital & SSI encoder). . . . .                                             | 102 |
| Figure 5-72 | EC motor (analog incremental encoder) . . . . .                                       | 103 |
| Figure 5-73 | EC motor (SSI encoder). . . . .                                                       | 104 |

## LIST OF TABLES

|            |                                                                         |    |
|------------|-------------------------------------------------------------------------|----|
| Table 1-1  | Notation used . . . . .                                                 | 6  |
| Table 1-2  | Symbols and signs . . . . .                                             | 6  |
| Table 1-3  | Brand names and trademark owners . . . . .                              | 7  |
| Table 2-4  | Technical data . . . . .                                                | 12 |
| Table 2-5  | Thermal resistance of additional heat sink [K/W] . . . . .              | 14 |
| Table 2-6  | Heat sink – Recommended components . . . . .                            | 14 |
| Table 2-7  | Limitations. . . . .                                                    | 15 |
| Table 2-8  | Standards . . . . .                                                     | 17 |
| Table 3-9  | Pin assignment A1...A32 (X1...X5) . . . . .                             | 20 |
| Table 3-10 | Pin assignment B1...B46 (X6...X12) . . . . .                            | 22 |
| Table 3-11 | Prefab maxon cables . . . . .                                           | 24 |
| Table 3-12 | EPOS4 Connector Set – Content . . . . .                                 | 24 |
| Table 3-13 | Recommended tools. . . . .                                              | 25 |
| Table 3-14 | Power supply connector X1 – Pin assignment . . . . .                    | 26 |
| Table 3-15 | Power Cable High Current . . . . .                                      | 26 |
| Table 3-16 | Logic supply connector X2 – Pin assignment . . . . .                    | 27 |
| Table 3-17 | Power Cable . . . . .                                                   | 27 |
| Table 3-18 | Motor connector X3a / X3b – Pin assignment for maxon DC motor . . . . . | 28 |
| Table 3-19 | Motor connector X3a / X3b – Pin assignment for maxon EC motor . . . . . | 28 |
| Table 3-20 | Motor Cable . . . . .                                                   | 29 |
| Table 3-21 | Motor Cable High Current. . . . .                                       | 29 |
| Table 3-22 | Hall sensor connector X4 – Pin assignment . . . . .                     | 30 |
| Table 3-23 | Hall Sensor Cable. . . . .                                              | 30 |
| Table 3-24 | Encoder connector X5 – Pin assignment . . . . .                         | 31 |
| Table 3-25 | Encoder connector X5 – Accessories . . . . .                            | 31 |
| Table 3-26 | Encoder Cable . . . . .                                                 | 31 |
| Table 3-27 | Sensor connector X6 – Pin assignment . . . . .                          | 32 |
| Table 3-28 | Sensor Cable 5x2core . . . . .                                          | 33 |
| Table 3-29 | Digital I/O connector X7 – Pin assignment . . . . .                     | 34 |
| Table 3-30 | Signal Cable 8core . . . . .                                            | 34 |
| Table 3-31 | Analog I/O connector X8 – Pin assignment . . . . .                      | 35 |
| Table 3-32 | Signal Cable 7core . . . . .                                            | 35 |
| Table 3-33 | STO connector X9 – Pin assignment . . . . .                             | 36 |
| Table 3-34 | STO Idle Connector . . . . .                                            | 36 |
| Table 3-35 | RS232 connector X10 – Pin assignment . . . . .                          | 37 |
| Table 3-36 | RS232-COM Cable. . . . .                                                | 37 |
| Table 3-37 | CAN 1 connector X11/CAN 2 connector X12 – Pin assignment. . . . .       | 38 |
| Table 3-38 | CAN-COM Cable . . . . .                                                 | 38 |
| Table 3-39 | CAN-CAN Cable. . . . .                                                  | 38 |
| Table 3-40 | DIP switch SW1 – Binary code values . . . . .                           | 39 |
| Table 3-41 | DIP switch SW1 – Examples . . . . .                                     | 40 |
| Table 3-42 | DIP switch SW1 – CAN automatic bit rate detection . . . . .             | 40 |

|            |                                                             |    |
|------------|-------------------------------------------------------------|----|
| Table 3-43 | DIP switch SW1 – CAN bus termination . . . . .              | 41 |
| Table 3-44 | DIP switch SW1 – Digital input level . . . . .              | 41 |
| Table 3-45 | Spare parts list . . . . .                                  | 41 |
| Table 3-46 | Power supply – Pin assignment . . . . .                     | 42 |
| Table 3-47 | Logic supply – Pin assignment . . . . .                     | 43 |
| Table 3-48 | DC motor – Pin assignment . . . . .                         | 44 |
| Table 3-49 | EC motor – Pin assignment . . . . .                         | 44 |
| Table 3-50 | Hall sensor – Pin assignment . . . . .                      | 45 |
| Table 3-51 | Encoder – Pin assignment . . . . .                          | 46 |
| Table 3-52 | Incremental encoder – Pin assignment . . . . .              | 48 |
| Table 3-53 | SSI absolute encoder – Pin assignment . . . . .             | 54 |
| Table 3-54 | High-speed digital I/Os – Pin assignment . . . . .          | 56 |
| Table 3-55 | Digital I/Os – Pin assignment – Module . . . . .            | 59 |
| Table 3-56 | Digital I/Os – Pin assignment – Compact . . . . .           | 60 |
| Table 3-57 | STO I/Os – Pin assignment . . . . .                         | 63 |
| Table 3-58 | STO logic state . . . . .                                   | 64 |
| Table 3-59 | Analog I/Os – Pin assignment . . . . .                      | 65 |
| Table 3-60 | SCI – Pin assignment . . . . .                              | 67 |
| Table 3-61 | RS232 – Pin assignment . . . . .                            | 68 |
| Table 3-62 | CAN bus line / CAN 1 / CAN 2 – Pin assignment . . . . .     | 69 |
| Table 3-63 | CAN ID – Pin assignment . . . . .                           | 70 |
| Table 3-64 | CAN ID – Examples . . . . .                                 | 70 |
| Table 3-65 | SPI – Pin assignment . . . . .                              | 72 |
| Table 3-66 | USB connector X13 – Pin assignment . . . . .                | 73 |
| Table 3-67 | USB Type A - micro B Cable . . . . .                        | 73 |
| Table 3-68 | Status LED . . . . .                                        | 74 |
| Table 4-69 | Motherboard Design Guide – Recommended components . . . . . | 80 |
| Table 4-70 | Motherboard Design Guide – Grounding . . . . .              | 81 |

## INDEX

### A

abbreviations used **8**  
 alerts **6**  
 analog incremental encoder (differential) **52**  
 analog inputs **65**  
 analog outputs **66**  
 applicable EU directive **19**  
 applicable regulations **9**

### B

bit rate detection **40, 71**  
 bit rate, default **69**  
 BLDC motor  
     connection **20, 44**  
     wiring diagram **92**

### C

C1 (capacitor) **76**  
 C2 (capacitor) **77**  
 cables (prefab)  
     CAN-CAN Cable **38**  
     CAN-COM Cable **38**  
     Encoder Cable **31**  
     Hall Sensor Cable **30**  
     Motor Cable **29**  
     Motor Cable High Current **29**  
     Power Cable **27**  
     Power Cable High Current **26**  
     RS232-COM Cable **37**  
     Sensor Cable 5x2core **33**  
     Signal Cable 7core **35**  
     Signal Cable 8core **34**  
     STO Idle Connector **36**  
     USB Type A - micro B Cable **73**  
 CAN bus termination **41, 69**  
 CAN ID **39, 70**  
 CAN interface **69**  
 choke, motor **78**  
 connectors  
     X1 **26**  
     X2 **27**  
     X3a **28**  
     X3b **28**  
     X4 **30**  
     X5 **31**  
     X6 **32**  
     X7 **34**  
     X8 **35**  
     X9 **36**  
     X10 **37**  
     X11 **38**  
     X12 **38**  
     X13 **73**  
 country-specific regulations **9**

### D

D1 (DVS diode) **76**  
 D2 (DVS diode) **77**  
 DC motor  
     connection **20, 44**  
     wiring diagram **85**  
 device condition, display of **74**  
 digital high-speed inputs (differential) **56**  
 digital high-speed inputs (single-ended) **57**  
 digital high-speed output **58**  
 digital incremental encoder (differential) **48**  
 digital incremental encoder (single-ended) **50**  
 digital inputs **59**  
 digital outputs **61**  
 DIP switch SW1 **39**

### E

EC motor  
     connection **20, 44**  
     wiring diagram **92**  
 encoders  
     absolute **54**  
     differential **46**  
     incremental **48**  
     serial **54**  
     single-ended **47**  
 EPOS4 Connector Set **24**  
 ESD **9**  
 EU directive, applicable **19**

### F

FU1 (input fuse) **76, 77**

### H

Hall sensor **45**  
 how to  
     calculate the required supply voltage **42**  
     get help in designing the motherboard **75**  
     interpret icons (and signs) used in this document **6**

## I

incorporation into surrounding system **19**  
 incremental encoder **48**  
 informatory signs **6**  
 inputs  
     analog **65**  
     digital **59**  
     high-speed digital **56**  
     STO **63**  
 interfaces  
     CAN **38, 69**  
     location and designation **83**  
     RS232 **37, 67**  
     SCI **67**  
     SPI **72**  
     USB **73**  
 internal motor chokes **78**

## L

LEDs, interpretation of **74**  
 logic supply **43**

## M

mandatory action signs **6**  
 motor choke **78**  
 motor types, supported **8**

## N

naming of components **8**  
 Node Address **39, 70**  
 notations used **6**

## O

operating license **19**  
 outputs  
     analog **66**  
     digital **61**  
     high-speed digital **58**  
     STO **64**

## P

part numbers  
     275829 **27**  
     275851 **29**  
     275878 **30**  
     275934 **31**  
     403968 **73**  
     504383 **11**  
     520850 **26**  
     520851 **29**  
     520852 **33**  
     520853 **34**  
     520854 **35**  
     520856 **37**  
     520857 **38**  
     520858 **38**  
     520859 **24**  
     520860 **36**  
     520884 **23**  
     520886 **11, 23**  
 performance data **11**  
 pin assignment **20**  
 power supply **42**  
 precautions **9**  
 prerequisites prior installation **19**  
 prohibitive signs **6**  
 protective measures (ESD) **9**  
 purpose  
     of the device **8**  
     of the document **5**

## R

regulations, applicable **9**

## S

Safe Torque Off (STO) **63**  
 safety alerts **6**  
 safety first! **9**  
 SCI (Serial Communication Interface) **67**  
 Serial Communication Interface (SCI) **67**  
 serial encoder **54**  
 signs used **6**  
 SPI (Serial Peripheral Interface) **72**  
 SSI absolute encoder **54**  
 standards, fulfilled **17**  
 status LEDs **74**  
 STO (Safe Torque Off) **63**  
 supply voltage, required **42**  
 SW1 **39**  
 symbols used **6**

## T

technical data **11**  
 termination (CAN bus) **41, 69**

## U

USB port **73**

## W

wiring diagrams

BLDC motors **92**

DC motors **85**

EC motors **92**

wiring examples

additional inductance on Motherboard **78**

DigOUT **62**



EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

© 2017 maxon motor. All rights reserved.

The present document – including all parts thereof – is protected by copyright. Any use (including reproduction, translation, microfilming, and other means of electronic data processing) beyond the narrow restrictions of the copyright law without the prior approval of maxon motor ag, is not permitted and subject to prosecution under the applicable law.

**maxon motor ag**  
Brünigstrasse 220  
P.O.Box 263  
CH-6072 Sachseln  
Switzerland

Phone +41 41 666 15 00

Fax +41 41 666 16 50

[www.maxonmotor.com](http://www.maxonmotor.com)