

maxon motor

maxon accessories

Cable with Connector

339380

Cable with connector, 8 poles

Length: 0.5 m

8 x 0.75 mm²

Cu shielded PVC cable

Outer diameter coating approx. 9.2 mm

Connector: Molex Mini-Fit Jr.™ Art. Nr.: 39-01-2080



Suitable for maxon EC 45 flat 70 W and maxon EC 90 flat 90 W.

Pin allocation

- | | |
|---|----------------------------------|
| 1 | Hall sensor 1 |
| 2 | Hall sensor 2 |
| 3 | V _{Hall} 4.5 ... 24 VDC |
| 4 | Winding 3 |
| 5 | Hall sensor 3 |
| 6 | GND |
| 7 | Winding 1 |
| 8 | Winding 2 |

Cable

- | |
|--------|
| yellow |
| pink |
| green |
| white |
| grey |
| blue |
| red |
| brown |

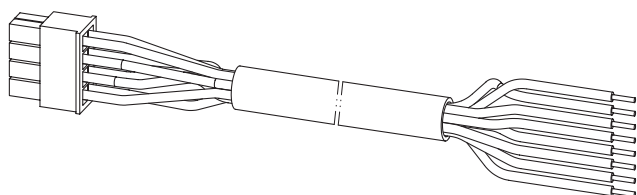

deutsche Version, siehe Rückseite

5/2012

maxon motor

maxon accessories

Cable with Connector

339380

Cable with connector, 8 poles

Length: 0.5 m

8 x 0.75 mm²

Cu shielded PVC cable

Outer diameter coating approx. 9.2 mm

Connector: Molex Mini-Fit Jr.™ Art. Nr.: 39-01-2080



Suitable for maxon EC 45 flat 70 W and maxon EC 90 flat 90 W.

Pin allocation

- | | |
|---|----------------------------------|
| 1 | Hall sensor 1 |
| 2 | Hall sensor 2 |
| 3 | V _{Hall} 4.5 ... 24 VDC |
| 4 | Winding 3 |
| 5 | Hall sensor 3 |
| 6 | GND |
| 7 | Winding 1 |
| 8 | Winding 2 |

Cable

- | |
|--------|
| yellow |
| pink |
| green |
| white |
| grey |
| blue |
| red |
| brown |

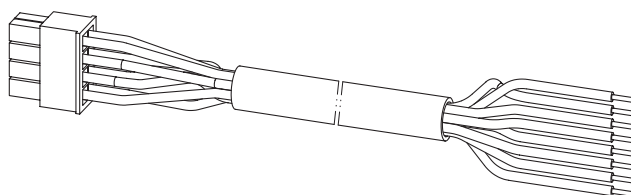

deutsche Version, siehe Rückseite

5/2012

maxon motor

maxon accessories

Cable with Connector

339380

Cable with connector, 8 poles

Length: 0.5 m

8 x 0.75 mm²

Cu shielded PVC cable

Outer diameter coating approx. 9.2 mm

Connector: Molex Mini-Fit Jr.™ Art. Nr.: 39-01-2080



Suitable for maxon EC 45 flat 70 W and maxon EC 90 flat 90 W.

Pin allocation

- | | |
|---|----------------------------------|
| 1 | Hall sensor 1 |
| 2 | Hall sensor 2 |
| 3 | V _{Hall} 4.5 ... 24 VDC |
| 4 | Winding 3 |
| 5 | Hall sensor 3 |
| 6 | GND |
| 7 | Winding 1 |
| 8 | Winding 2 |

Cable

- | |
|--------|
| yellow |
| pink |
| green |
| white |
| grey |
| blue |
| red |
| brown |

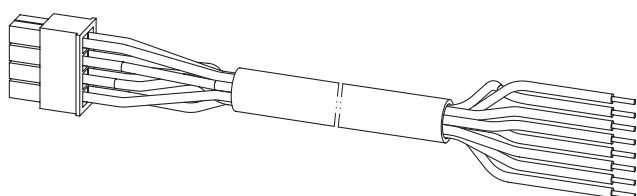

deutsche Version, siehe Rückseite

5/2012

maxon motor

maxon accessories

Cable with Connector

339380

Cable with connector, 8 poles

Length: 0.5 m

8 x 0.75 mm²

Cu shielded PVC cable

Outer diameter coating approx. 9.2 mm

Connector: Molex Mini-Fit Jr.™ Art. Nr.: 39-01-2080



Suitable for maxon EC 45 flat 70 W and maxon EC 90 flat 90 W.

Pin allocation

- | | |
|---|----------------------------------|
| 1 | Hall sensor 1 |
| 2 | Hall sensor 2 |
| 3 | V _{Hall} 4.5 ... 24 VDC |
| 4 | Winding 3 |
| 5 | Hall sensor 3 |
| 6 | GND |
| 7 | Winding 1 |
| 8 | Winding 2 |

Cable

- | |
|--------|
| yellow |
| pink |
| green |
| white |
| grey |
| blue |
| red |
| brown |

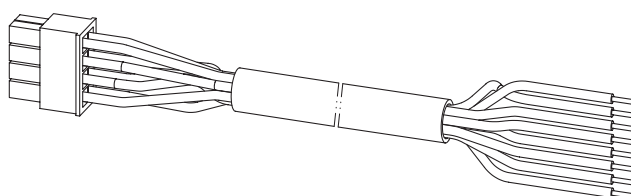

deutsche Version, siehe Rückseite

5/2012