

ESCON2 Feature Chart

Modules

Nano

ESCON2 Nano 24/2
809635



Micro

ESCON2 Micro 60/5
809631



Modules

ESCON2 Module 60/12
854796



ESCON2 Module 60/30
783722



Ready-to-connect units

Compacts


ESCON2 Compact 60/2
903540




ESCON2 Compact 60/5
903533



ESCON2 Compact 60/12
854801

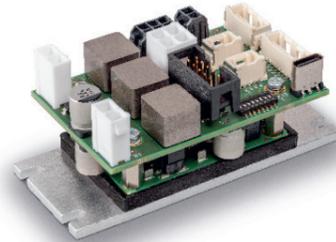


ESCON2 Compact 60/30
783734

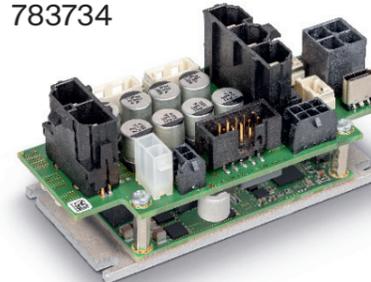

Encased housing

ESCON2 60/12
854806

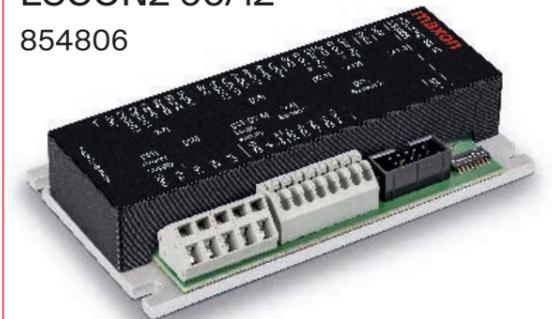

The ESCON2 line of products from maxon are small, powerful 4-quadrant PWM servo controllers. Their high power density allows flexible use for brushed DC motors and brushless EC (BLDC) motors up to 1,800 Watts with various feedback options, such as Hall sensors, incremental encoders, and absolute sensors in many drive applications. The devices are designed to be controlled by analog and digital set values or as a slave node in a CANopen network. You can also operate them via any USB or RS232 port on a Windows workstation. They feature extensive analog and digital I/O functions. They use the latest technology, such as field-oriented control (FOC) and acceleration/velocity feed forward, with high control cycle rates for easy and advanced motion control. The free Graphic User Interface (GUI) "Motion Studio" enables convenient configuration, quick monitoring and diagnostics, and automated tuning of all drive systems.



escon.maxongroup.com

Feature	Modules				Ready-to-connect Units				
	ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)
Product image									
Communication interfaces									
CANopen slave	max. 1 Mbit/s (external CAN-transceiver required)	max. 1 Mbit/s							
	CANopen Application Layer and Communication Profile				CiA 301				
	CANopen Additional Application Layer Functions				CiA 302				
	CANopen Layer Setting Services (LSS) and Protocol				CiA 305				
	CANopen Electronic Data Sheet Specification				CiA 306				
	CANopen Device Profile for Drives and Motion Control				CiA 402				
	CANopen Automatic Bit-Rate Detection				CiA 801				
Serial communication interface (RS232)	max. 115'200 bit/s (external RS232-transceiver required)	max. 115'200 bit/s (external RS232-transceiver required)	max. 115'200 bit/s (external RS232-transceiver required)	max. 115'200 bit/s (external RS232-transceiver required)	-	-	-	-	-
	Gateway function RS232-to-CAN	✓	✓	✓	✓	-	-	-	-
USB					Full Speed				
	Gateway function USB-to-CAN	✓							
Motors									
Brushed DC motor up to (cont. / max.)	48 W / 144 W	300 W / 900 W	720 W / 1'440 W	1'800 W / 3'600 W	120 W / 360 W	300 W / 900 W	720 W / 1'440 W	1'800 W / 3'600 W	720 W / 1'440 W
Brushless EC motor (BLDC) up to (cont. / max.)									
Sensors (feedback)									
2026-01									
Without sensor (DC motor)					Current mode only (IOCM)				
Digital Hall sensors (EC motor)					✓				
Digital incremental encoder					✓				
SSI absolute encoder					✓				
BiSS C unidirectional absolute encoder					✓				
Commutation									
Digital Hall sensors (FOC)					✓				
Digital Hall sensors + digital incremental encoder (FOC)					✓				
Digital incremental encoder (FOC)					✓				
Absolute encoder (FOC)					✓				
Automatic commutation offset adjustment (for incremental and absolute encoders)					✓				
Electrical data									
Nominal power supply voltage V_{CC}	5...24 VDC 6...24 VDC [a]	10...60 VDC							
Nominal logic supply voltage V_C	-	10...60 VDC							
Absolute supply voltage limits V_{min} / V_{max}	4.75 VDC / 28 VDC 5.8 VDC / 28 VDC [a]	8 VDC / 62 VDC							
Output voltage (max.)	$0.90 \times V_{CC}$	$0.95 \times V_{CC}$	$0.90 \times V_{CC}$	$0.95 \times V_{CC}$	$0.90 \times V_{CC}$	$0.90 \times V_{CC}$	$0.90 \times V_{CC}$	$0.95 \times V_{CC}$	$0.90 \times V_{CC}$
Output current I_{cont} / I_{max}	2 A / 6 A (< 6.5 s)	5 A / 15 A (< 4 s)	12 A / 24 A (< 10 s)	30 A / 60 A (< 4 s)	2 A / 6 A (< 30 s)	5 A / 15 A (< 5 s)	12 A / 24 A (< 10 s)	30 A / 60 A (< 4 s)	12 A / 24 A (< 7.5 s)
Pulse width modulation (PWM) frequency	50 kHz	50 kHz	100 kHz	50 kHz	100 kHz	100 kHz	100 kHz	50 kHz	100 kHz
Sampling rate PI current controller					50 kHz				
Sampling rate PI speed controller					10 kHz				
Sampling rate analog input					50 kHz				
Max. efficiency	93 %	97.5 %	97.7 %	98.5 %	96 %	97 %	97.7 %	98.5 %	97.5 %
Max. speed DC motor	Limited by max. permissible motor speed and the max. output voltage of the controller.								

Feature	Modules				Ready-to-connect Units										
	ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)						
Max. speed EC motor (FOC)	120'000 rpm (FOC, 1 pole pair) Can be limited by the max. permissible motor speed and the max. output voltage of the controller.														
Built-in motor choke per phase	-	-	-	-	44 µH / 5 A	13.6 µH / 9 A	4.7 µH / 12 A	0.47 µH / 30 A	22 µH / 12 A						
Inputs & outputs															
Sensor 1	Digital Hall sensor	H1, H2, H3 (0...24 VDC, internal pull-up)													
Sensor 2 (choice between multiple functions)															
	Digital incremental encoder	2-channel (single-ended, 0...12 VDC, max. 6.25 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)	2-channel (EIA/RS422, max. 6.67 MHz)					
	SSI absolute encoder	Configurable (single-ended, 0...12 VDC, 0.4...2 MHz)													
	BISS C unidirectional absolute encoder	Configurable (single-ended, 0...12 VDC, 0.4...4 MHz)													
	High-speed digital inputs 1...2	0...12 VDC, max. 6.25 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz	EIA/RS422, max. 6.67 MHz					
	High-speed digital inputs 3...4	0...12 VDC, max. 6.25 MHz													
	High-speed digital output 1	3.3 VDC / R _i = 270 Ω	3.3 VDC / R _i = 270 Ω	3.3 VDC / R _i = 270 Ω	3.3 VDC / R _i = 270 Ω	3.3 VDC / I _L ≤ 24 mA / R _i = 75 Ω	3.3 VDC / I _L ≤ 24 mA / R _i = 75 Ω	3.3 VDC / I _L ≤ 24 mA / R _i = 75 Ω	3.3 VDC / I _L ≤ 24 mA / R _i = 75 Ω	3.3 VDC / I _L ≤ 24 mA / R _i = 75 Ω					
Digital inputs 1...4		0...25 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz	0...30 VDC, inputs 1...2 PWM capable 10 kHz					
Digital outputs 1...2		3.3 VDC / R _i = 270 Ω, PWM capable 25 kHz	3.3 VDC / R _i = 270 Ω, PWM capable 25 kHz	3.3 VDC / R _i = 270 Ω, PWM capable 25 kHz	3.3 VDC / R _i = 270 Ω, PWM capable 25 kHz	Open drain, max. 36 VDC / I _L ≤ 500 mA, internal pull-up, PWM capable 25 kHz	Open drain, max. 36 VDC / I _L ≤ 500 mA, internal pull-up, PWM capable 25 kHz	Open drain, max. 36 VDC / I _L ≤ 500 mA, internal pull-up, PWM capable 25 kHz	Open drain, max. 36 VDC / I _L ≤ 500 mA, internal pull-up, PWM capable 25 kHz	Open drain, max. 36 VDC / I _L ≤ 500 mA, internal pull-up, PWM capable 25 kHz					
Analog inputs 1...2		Resolution 12-bit, 0...5 VDC (referenced to GND), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz	Resolution 12-bit, ± 10 VDC (differential), 10 kHz					
Analog outputs 1...2		Resolution 12-bit, 0...3.3 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz	Resolution 12-bit, ± 4 VDC (referenced to GND), 25 kHz					
Motor temperature sensor		Resolution 12-bit, 0...3.3 VDC (internal pull-up)													
Sensor supply voltage V _{Sensor}		5 VDC / I _L ≤ 145 mA													
Peripheral supply voltage V _{Peripheral}		3.3 VDC / I _L ≤ 20 mA	3.3 VDC / I _L ≤ 20 mA	3.3 VDC / I _L ≤ 20 mA	3.3 VDC / I _L ≤ 20 mA	-	-	-	-	-					
Status indicators (LEDs)		- (external LEDs required)	- (external LEDs required)	- (external LEDs required)	- (external LEDs required)	Green (operation) / red (warning/error)									
Connections															
X1	Power supply	Header 2×30 poles 0.40 mm (Pins A1...A60) Panasonic P4SP	Header 2×40 poles 0.40 mm (Pins A1...A80) Samtec ST4	Socket 24 poles 2.54 mm (Pins A1...A24) Samtec SSM	Socket 6 poles 2.00 mm (Pins A1...A6) Samtec UMPS	Harting har-flexion 3 poles	Harting har-flexion 3 poles	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 10.00 mm, Molex Mini-Fit Sr.	Spring clamp 5 mm, Dinkle terminal block					
X2	Logic supply			Socket 2×25 poles 0.8 mm (Pin B1) Samtec ERF8	Socket 2×25 poles 0.80 mm (Pin C1) Samtec ERF8			Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2 poles 4.20 mm, Molex Mini-Fit Jr.	Push-in design 3.5 mm, Dinkle terminal block	
X3a	Motor			Header 2×30 poles 0.40 mm (Pins A1...A60) Panasonic P4SP	Header 2×40 poles 0.40 mm (Pins A1...A80) Samtec ST4	Socket 24 poles 2.54 mm (Pins A1...A24) Samtec SSM	Socket 10 poles 2.00 mm (Pins B1...B10) Samtec UMPS	Header 2×2 poles 4.20 mm, Molex Mini-Fit Jr.,	Header 2×2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2×2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 3 poles 10.00 mm, Molex Mini-Fit Sr.	Spring clamp 5 mm, Dinkle terminal block			
X3b						Header 3 poles 2 mm, Hirose DF3	-	Header 2×2 poles 4.20 mm, Molex Mini-Fit Jr.	Header 2×2 poles 5.70 mm, Molex Mega-Fit						
X4	Hall sensor (Sensor 1)					Header 2×3 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2×3 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2×3 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2×3 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2×3 poles 3.00 mm, Molex Micro-Fit 3.0	Push-in design 3.5 mm, Dinkle terminal block				
X5	Sensor (Sensor 2)					Header 2×5 poles 2.54 mm, DIN 41651	Header 2×5 poles 2.54 mm, DIN 41651	Header 2×5 poles 2.54 mm, DIN 41651	Header 2×5 poles 2.54 mm, DIN 41651	Header 2×5 poles 2.54 mm, DIN 41651	Header 2×5 poles 2.54 mm, DIN 41651				
X7	Digital I/Os					Receptacle 8 poles 1.50 mm, Molex CLIK-Mate	Receptacle 8 poles 1.50 mm, Molex CLIK-Mate	Receptacle 8 poles 1.50 mm, Molex CLIK-Mate	Receptacle 8 poles 1.50 mm, Molex CLIK-Mate	Receptacle 8 poles 1.50 mm, Molex CLIK-Mate	Push-in design 3.5 mm, Dinkle terminal block				
X8	Analog I/Os					Receptacle 7 poles 1.50 mm, Molex CLIK-Mate	Receptacle 7 poles 1.50 mm, Molex CLIK-Mate	Receptacle 7 poles 1.50 mm, Molex CLIK-Mate	Receptacle 7 poles 1.50 mm, Molex CLIK-Mate	Receptacle 7 poles 1.50 mm, Molex CLIK-Mate					
X10	SCI (RS232)					-	-	-	-	-	-	-	-	-	-
X11	CAN 1					Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Push-in design 3.5 mm, Dinkle terminal block				
X12	CAN 2					Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate	Receptacle 4 poles 1.50 mm, Molex CLIK-Mate					
X13	USB					USB Type C	USB Type C	USB Type C	USB Type C	USB Type C	USB Type C				
X16	Motor temperature sensor					Header 2 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2 poles 3.00 mm, Molex Micro-Fit 3.0	Header 2 poles 3.00 mm, Molex Micro-Fit 3.0	-				

Feature	Modules				Ready-to-connect Units					
	ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)	
Mechanical data										
Dimensions (L × W × H)	23 × 16 × 4.5 mm	36.8 × 23.8 × 6.5 mm	49.5 × 31 × 12.4 mm	67 × 43 × 7.8 mm	55 × 40 × 22.8 mm	55 × 40 × 22.8 mm	81 × 41 × 33.5 mm	93.5 × 46 × 41 mm	116 × 67 × 24 mm	
Weight (approx.)	2.5 g	6 g	12 g	19 g	32 g	32 g	90 g	128 g	182 g	
Mounting	Pluggable (using header) and M2 screws	Pluggable (using header) and M2 screws	Pluggable (using sockets) and M2.5 screws	Pluggable (using sockets) and M2.5 screws	M2.5 screws	M2.5 screws	M3 screws	M3 screws	M3 screws	
Environmental conditions										
Temperature [b]										
	Operation	-40 °C...+45 °C	-40 °C...+50 °C	-40 °C...+50 °C	-40 °C...+25 °C	-40 °C...+60 °C	-40 °C...+35 °C	-40 °C...+50 °C	-40 °C...+25 °C	-40 °C...+45 °C
	Extended range and derating	45 °C...70 °C (for derating check «Hardware Reference»)	50 °C...70 °C (for derating check «Hardware Reference»)	50 °C...80 °C (for derating check «Hardware Reference»)	25 °C...75 °C (for derating check «Hardware Reference»)	60 °C...65 °C (for derating check «Hardware Reference»)	35 °C...65 °C (for derating check «Hardware Reference»)	50 °C...80 °C (for derating check «Hardware Reference»)	25 °C...75 °C (for derating check «Hardware Reference»)	45 °C...85 °C (for derating check «Hardware Reference»)
	Storage	-40...+85 °C								
Altitude [b]										
	Operation	0...500 m MSL								
	Extended range	500...10'000 m MSL (for derating check «Hardware Reference»)								
Humidity										
		5...90 % (condensation not permitted)								
Directives & standards										
EMC Generic IEC/EN 61000-6-2; IEC/EN 61000-6-3										
EMC Applied IEC/EN 55032 (CISPR32); IEC/EN 61000-4-3; IEC/EN 61000-4-4; IEC/EN 61000-4-6										
Environment IEC/EN 60068-2-6; MIL-STD-810F										
Safety (UL 94 V-0, unassembled PCB) ✓										
Reliability (MIL-HDBK-217F, MTBF) [b]										
		988'899 hours	347'202 hours	203'569 hours	317'416 hours	379'151 hours	241'778 hours	160'475 hours	225'850 hours	166'943 hours
Operating modes										
IOCM	I/O current mode (analog & digital commanding)	✓								
IOVM	I/O velocity mode closed loop (analog & digital commanding)	✓								
CST	Cyclic Synchronous Torque Mode	✓								
CSV	Cyclic Synchronous Velocity Mode	✓								
PVM	Profile Velocity Mode	✓								
Features										
Advanced automatic control settings (Auto Tuning) ✓										
Custom persistent memory ✓										
Feed forward (acceleration/velocity for inertia and friction compensation) ✓										
Field-oriented Control (FOC) sinusoidal commutation ✓										
Digital I/O functionalities										
Inputs (configurable) ✓										
	Direction	✓								
	Drive enable	✓								
	Enable positive / negative direction	✓								
	General purpose	✓								
	Limit switch	✓								
	Mode switch (between IOCM & IOVM)	✓								
	PWM current limit	✓								
	PWM set value	✓								
	PWM set value offset	✓								
	PWM velocity limit	✓								
	PWM velocity ramp	✓								
	Quick stop	✓								

Feature	Modules				Ready-to-connect Units				
	ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)
RC servo current limit					✓				
RC servo set value					✓				
RC servo set value offset					✓				
RC servo velocity limit					✓				
RC servo velocity ramp					✓				
Set value switch (between up to 4 fixed set values)					✓				
Outputs (configurable)					✓				
Current compare					✓				
Fault					✓				
General purpose					✓				
Hall sensor frequency (commutation / rotation)					✓				
Holding brake					✓				
Limitation					✓				
Set brake					✓				
Velocity compare					✓				
Analog I/O functionalities									
Inputs (configurable)					✓				
Analog current limit					✓				
Analog set value					✓				
Analog set value offset					✓				
Analog velocity limit					✓				
Analog velocity ramp					✓				
General purpose					✓				
Outputs (configurable)					✓				
Current monitor					✓				
General purpose					✓				
Temperature monitor					✓				
Velocity monitor					✓				
Built-in limitations & protections									
Current limiter (adjustable)					✓				
Overcurrent					✓				
Short-circuit of motor winding					✓				
Thermal motor protection with sensor (adjustable)					✓				
Thermal motor protection model based (adjustable)					✓				
Thermal controller protection logic & power stage (adjustable)					✓				
Overvoltage (adjustable)					✓				
Undervoltage (adjustable)					✓				
Voltage transients					✓				
Velocity limiter (adjustable)					✓				
Loss of feedback signal					✓				
System monitoring					✓				
Error & warning behavior management					✓				

Feature	Modules				Ready-to-connect Units				
	ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)
Software (en)									
Installation program	Motion Installer								
Graphical user interface	Motion Studio You can watch video tutorials in the ESCON video library. These tutorials show how to start with «Motion Studio». They also show how to set up the communication interfaces and how to configure the controller. The tutorials give basic instructions and helpful tips. Explore the video library on Vimeo: https://vimeo.com/album/4646396								
	Startup					✓			
	Regulation tuning					✓			
	Firmware update					✓			
	Parameter upload / download					✓			
	Motion commander					✓			
	I/O monitor					✓			
	Parameters (Object dictionary)					✓			
	Status monitor					✓			
	Data recorder					✓			
	Command analyzer					✓			
	CANopen wizard					✓			
	Online help					✓			
Operating system	Windows 11, 10								
Windows DLL for PC	✓								
Linux shared object library	✓								
CAN interfaces	IXXAT National Instruments KVaser Vector								
Accessories (not included in delivery)									
854800	ESCON2 CB 60/12	-	-	✓	-	-	-	-	-
783729	ESCON2 CB 60/30	-	-	-	✓	-	-	-	-
809646	ESCON2 EB Micro	-	✓	-	-	-	-	-	-
834838	ESCON2 EB Nano	✓	-	-	-	-	-	-	-
841890	ESCON2 Micro 60/5 Thermal Accessory Kit	-	✓	-	-	-	-	-	-
902315	ESCON2 Module 60/12 Heat Spreader	-	-	✓	-	-	-	-	-
902308	ESCON2 Module 60/12 Thermal Accessory Kit	-	-	✓	-	-	-	-	-
816161	ESCON2 Module 60/30 Heat Spreader	-	-	-	✓	-	-	-	-
802197	ESCON2 Module 60/30 Thermal Pad	-	-	-	✓	-	-	-	-
876085	ESCON2 Nano 24/2 Thermal Accessory Kit	✓	-	-	-	-	-	-	-
894401	Adapter Encoder DIN 41651 to CLIK-Mate	-	-	-	-	✓	✓	✓	✓
549609	Adapter Encoder connector 1.27 to 2.54 mm pitch	-	-	-	-	✓	✓	✓	✓
520858	CAN-CAN Cable	-	-	-	-	✓	✓	✓	✓
520857	CAN-COM Cable	-	-	-	-	✓	✓	✓	✓
275934	Encoder Cable	-	-	-	-	✓	✓	✓	✓
275878	Hall Sensor Cable	-	-	-	-	✓	✓	✓	✓
846644	Motion Connector Set	-	-	-	-	✓	✓	✓	-
846645	Motion Connector Set Highest Current	-	-	-	-	-	-	✓	-
520851	Motor Cable High Current	-	-	-	-	-	-	✓	-
710930	Motor Cable High Current	-	-	-	-	-	✓	-	-
275851	Motor Cable	-	-	-	-	✓	✓	-	-
838460	Motor Cable Highest Current	-	-	-	-	-	-	✓	-
931651	Motor Cable	-	-	-	-	✓	-	-	-
847301	NTC Cable	-	-	-	-	✓	✓	✓	✓
275829	Power Cable	-	-	-	-	-	-	✓	✓
710929	Power Cable High Current	-	-	-	-	-	-	✓	-
838459	Power Cable Highest Current	-	-	-	-	-	-	✓	-

Feature		Modules				Ready-to-connect Units				
		ESCON2 Nano 24/2 (809635)	ESCON2 Micro 60/5 (809631)	ESCON2 Module 60/12 (854796)	ESCON2 Module 60/30 (783722)	ESCON2 Compact 60/2 (903540)	ESCON2 Compact 60/5 (903533)	ESCON2 Compact 60/12 (854801)	ESCON2 Compact 60/30 (783734)	ESCON2 60/12 (854806)
520854	Signal Cable 7core	-	-	-	-	✓	✓	✓	✓	-
520853	Signal Cable 8core	-	-	-	-	✓	✓	✓	✓	-
262359 & 354046	Terminal Adapter and Ribbon Cable	-	-	-	-	✓	✓	✓	✓	✓
838461	USB Type A-Type C cable	-	-	-	-	✓	✓	✓	✓	✓
845854	USB Type C-Type C cable	-	-	-	-	✓	✓	✓	✓	✓

Legend

Features in gray will follow in an upcoming release.

[a] = With use of sensor supply voltage output.

[b] = For the Modules, the data was measured with the controller configured to reflect a typical customer application. For more details, check the corresponding «Hardware Reference».

Copyright

In the present document, registered brand names are not tagged with their respective trademark. It must be understood that the brands (below list is not necessarily concluding) are protected by copyright and/or other intellectual property rights even if their legal trademarks are omitted.

BiSS © iC-Haus GmbH, DE-Bodenheim

CANopen®, CiA® © CiA CAN in Automation e.V, DE-Nuremberg

Molex® © Molex, LLC United States of America

Panasonic® © Panasonic Holdings Corporation (Kadoma, Präfektur Ōsaka, Japan)

Samtec® © Samtec Inc. (520 Park East Blvd. New Albany, INDIANA UNITED STATES 47151)

Windows® © Microsoft Corporation, USA-Redmond, WA

© 2026 maxon. All rights reserved. Any use, in particular reproduction, editing, translation, and copying, without prior written approval is not permitted (contact: maxon international ltd., Brünigstrasse 220, CH-6072 Sachseln, +41 41 666 15 00, www.maxongroup.com). Infringements will be prosecuted under civil and criminal law. The mentioned trademarks belong to their respective owners and are protected under trademark laws. Subject to change without prior notice.

CCMC | ESCON2 Feature Chart | Edition 2026-01 | Document ID rel13505